



Toshiba Satellite C55D-B5206 RAM Replacement

Written By: David Amodei



TOOLS:

Metal Spudger (1)

JIS #0 Screwdriver (1)

Spudger (1)

PARTS:

PC3-12800 8 GB RAM Chip (1)

Step 1 — RAM




- First, flip the laptop over and use the J1 screwdriver (in the iFixit tool kit) to unscrew the 15 screws indicated in the picture.
- ☑ Make sure to put your screws in a safe place to make sure they do not get lost.

Step 2



- Once you take the screws out, take the battery off; it should slide off easily.

Step 3

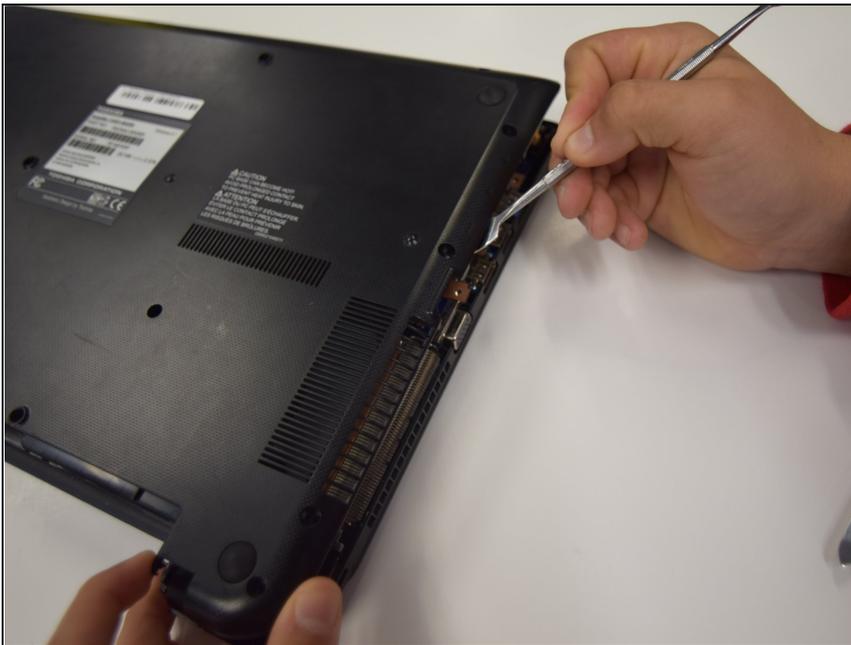


- Next, move around the edges of the computer with the metal spudger prying off the casing. You should hear clicks as you do this; this is not the casing breaking, it is just popping off.

Step 4




- Then, carefully take off the back casing of the laptop and set it aside.

Step 5

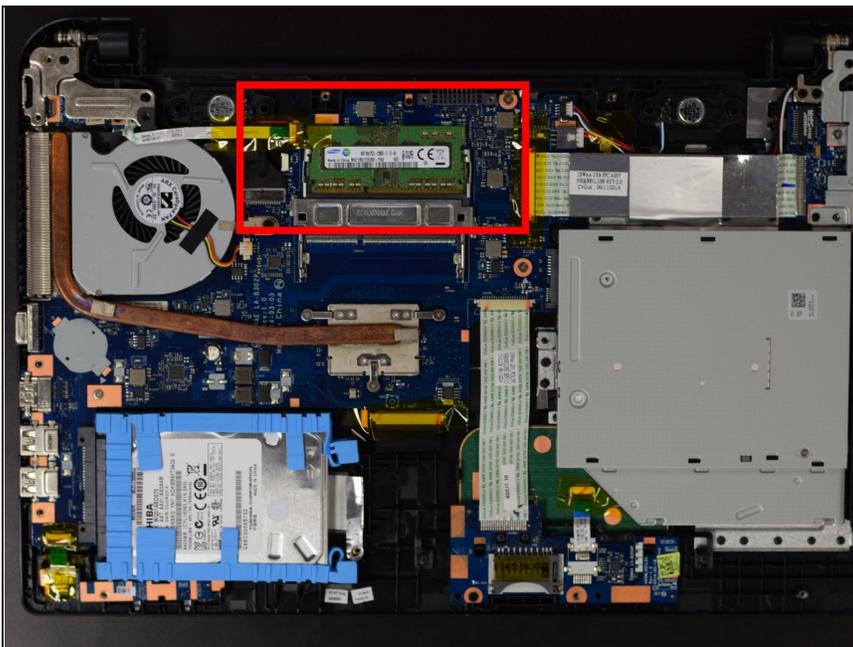

- This is where the RAM is located that you will be replacing.

Step 6

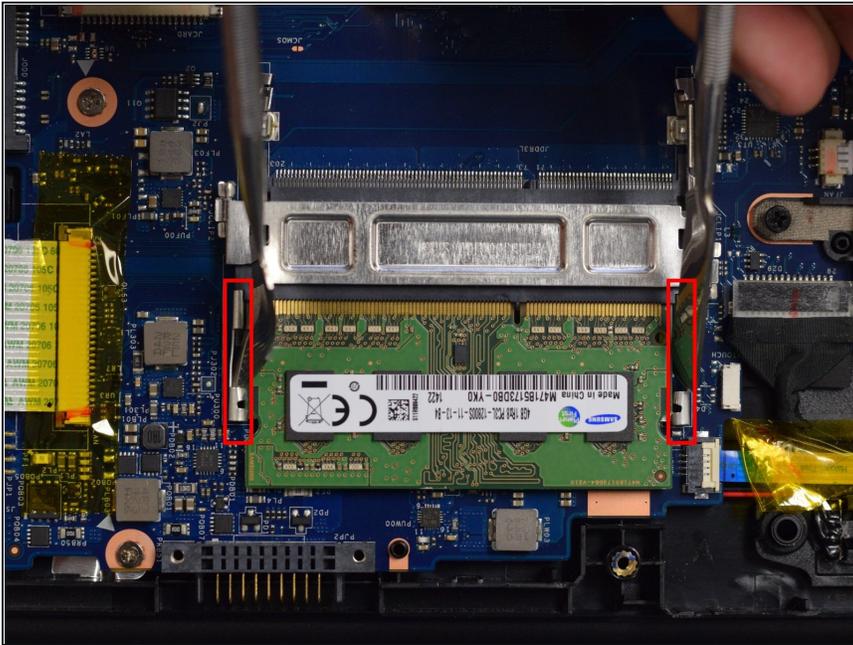

- There are two clips holding the RAM in place.
- You will need to hold both of them back to be able to safely remove the RAM.

⚠ Use plastic spudgers, as the metal spudgers pictured here are not ESD-safe.

Step 7



- Gently remove the RAM and insert replacement.

To reassemble your device, follow these instructions in reverse order.

