



Asus ROG G751JL-DS71 Top Rear Panel Replacement

This guide will show the user how to safely remove and replace the Top Rear Panel.

Written By: Aurora Rios



INTRODUCTION


This guide will show the user how to safely remove and replace the Top Rear Panel.



TOOLS:


- [Tweezers](#) (1)
 - [Phillips #1 Screwdriver](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Top Rear Panel

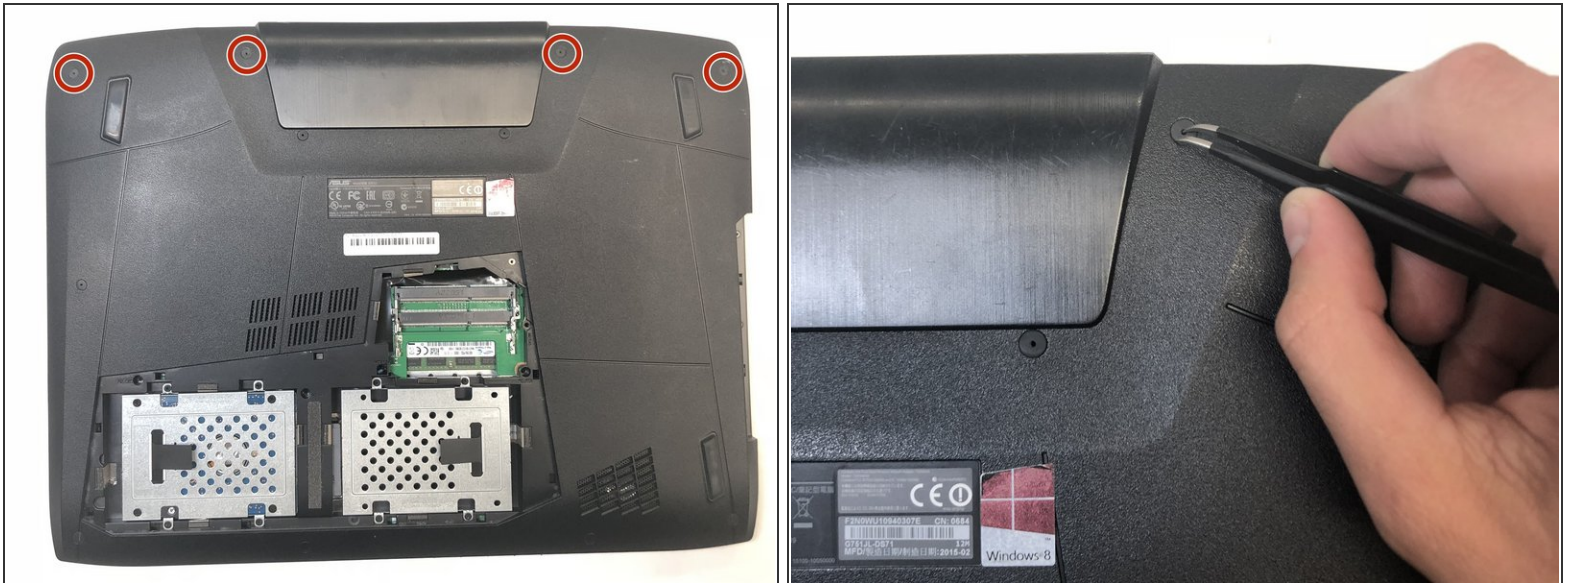

- Use a pair of tweezers to remove the top four rubber stoppers found on the bottom of the laptop.

Step 2

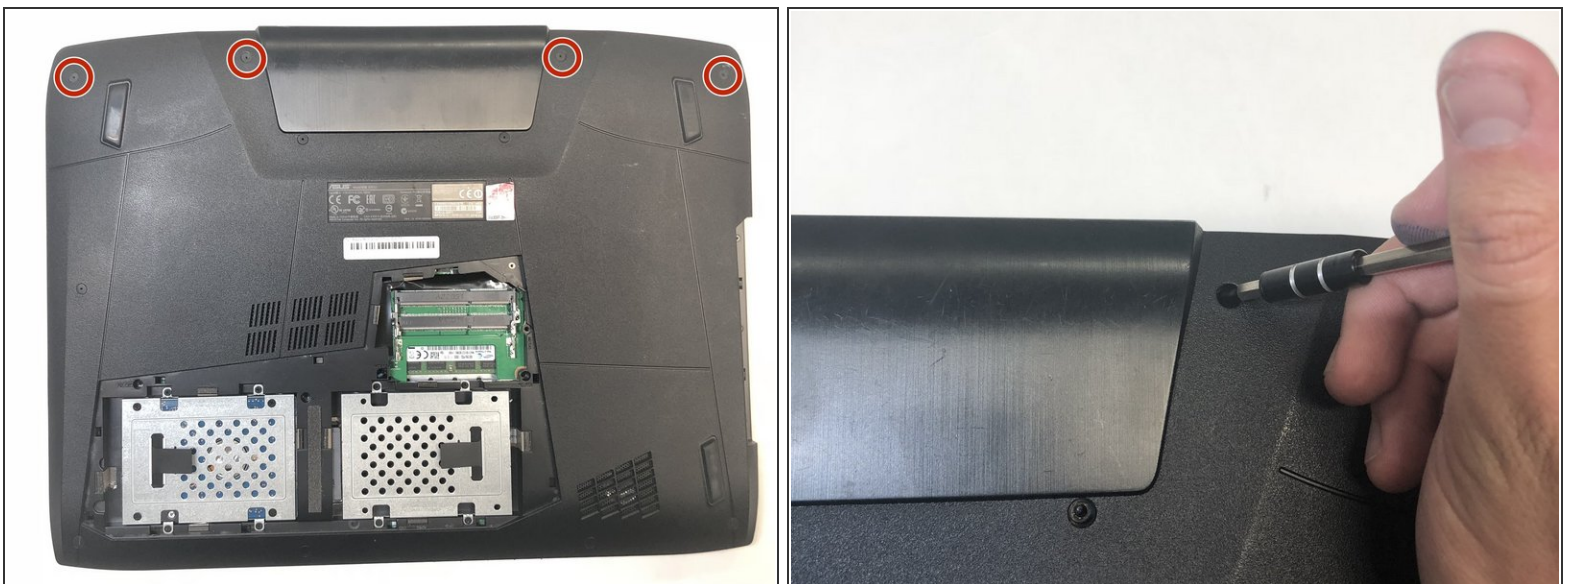

- Use a Phillips 1 Screwdriver to remove the top four 8.5 mm screws.

Step 3



- Use a nylon spudger to carefully pry the top back panel off.
- ⚠ While removing the top back panel, be careful not to break the four pin connector located underneath.
- Disconnect the four-pin connector and remove the top back panel from the computer.

To reassemble your device, follow these instructions in reverse order.