




Dell Vostro 1700 Memory Module Replacement

Written By: Johnathan Hammond

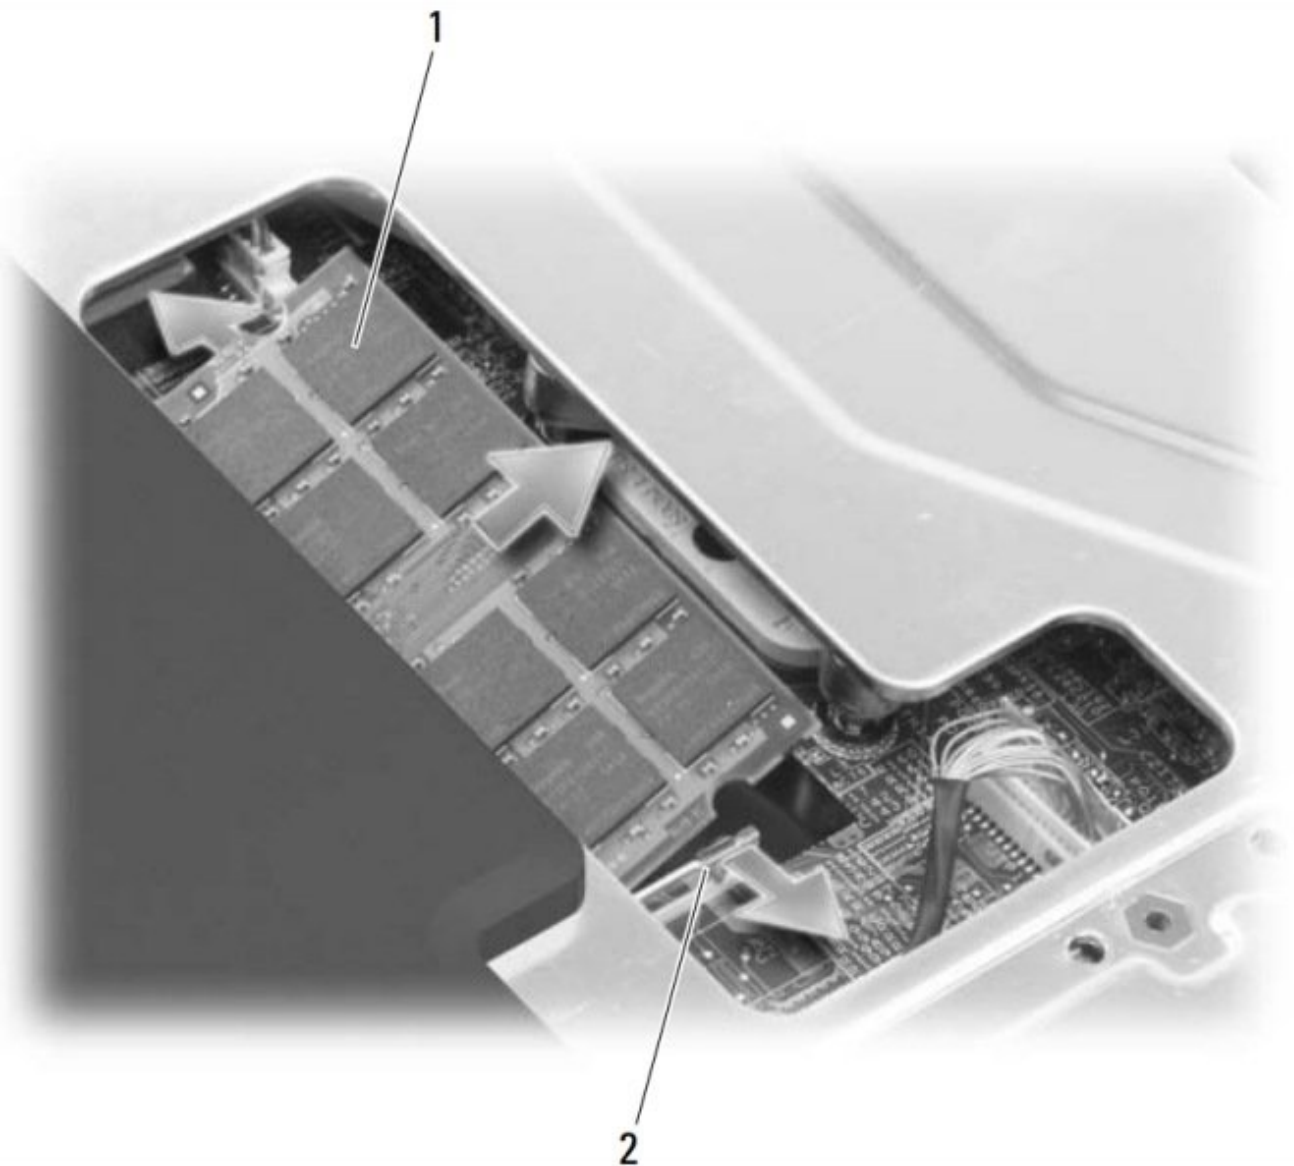

INTRODUCTION


In this guide, we will be showing you how to remove and replace the Memory Module.



TOOLS:


- [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Removing the Battery

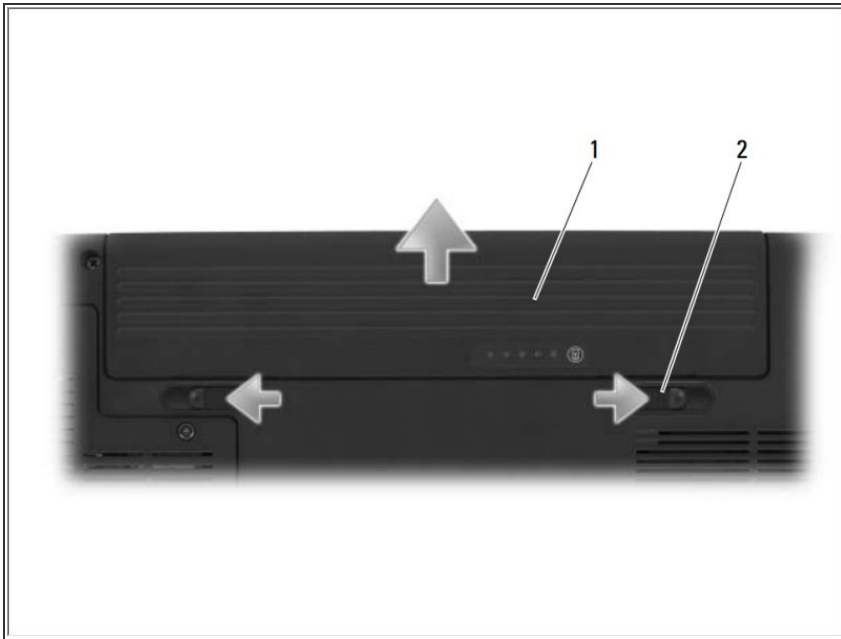


- Slide and click the battery release latches to keep them open.
- Slide the battery out of the bay.

Step 2 — Removing the Hinge Cover

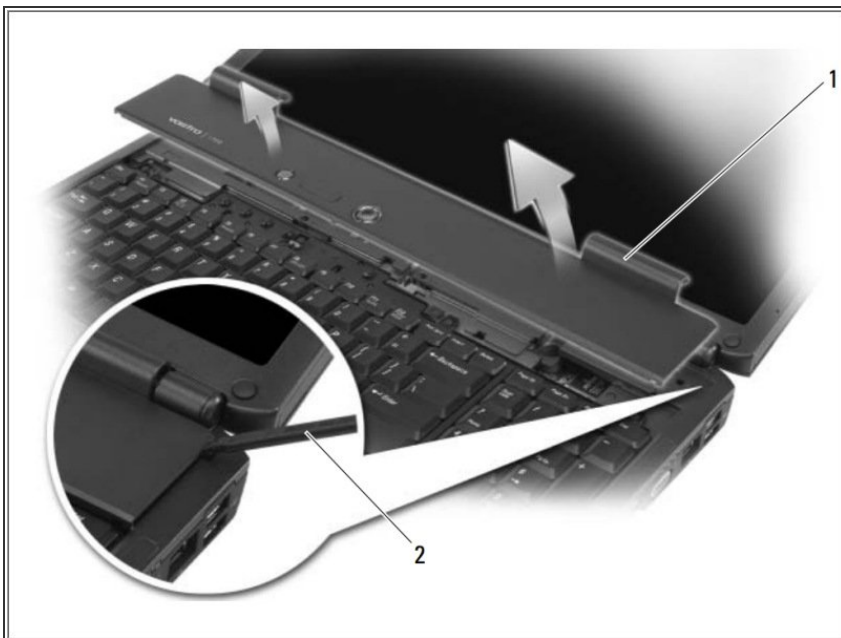


- Insert a plastic scribe into the indent to lift the hinge cover on the right side.
- Ease the hinge cover up, moving from right to left, and remove it.

Step 3 — Removing the Keyboard

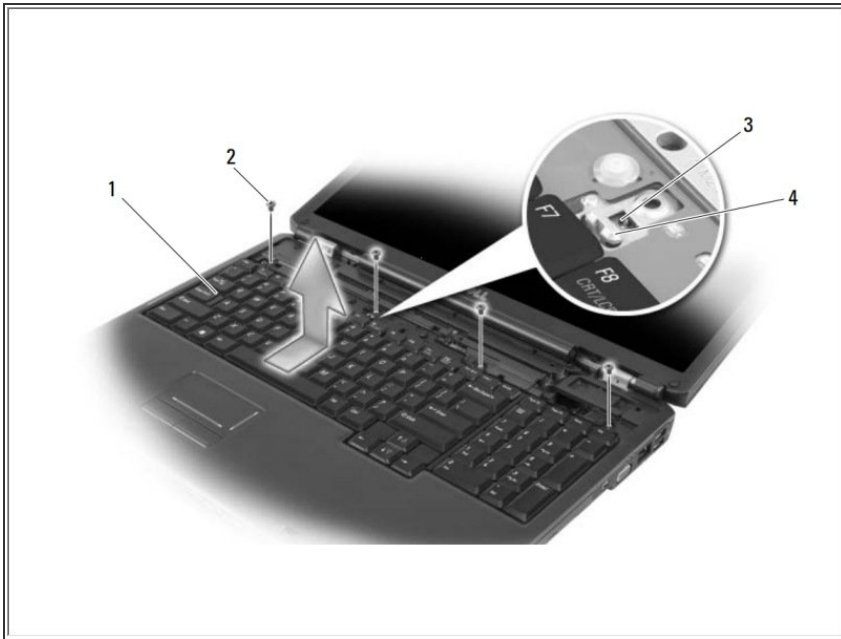

- Remove the four screws at the top of the keyboard.
- ⓘ **NOTICE:** The keycaps on the keyboard are fragile, easily dislodged, and timeconsuming to replace. Be careful when removing and handling the keyboard.
- Slide the keyboard toward the back of the computer to disengage the notch on the keyboard from the tab on the base of the computer.
- Lift and remove the keyboard.

Step 4 — Removing the Memory Module

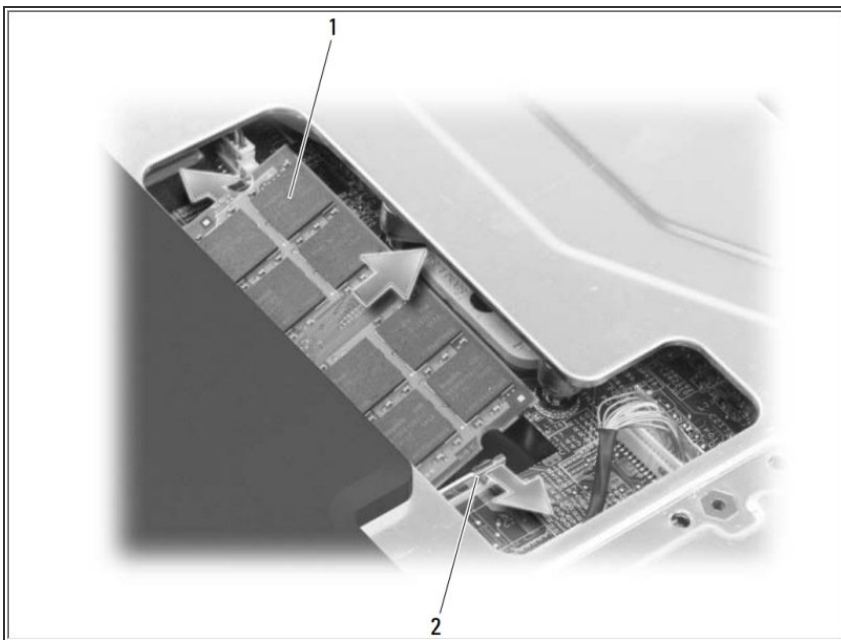

- ⓘ **NOTICE:** To prevent damage to the memory module connector, do not use tools to spread the memory-module securing clips.
- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
- Remove the memory module from the connector.

