


Alienware M11xR2 Display Assembly Replacement

Written By: darrius

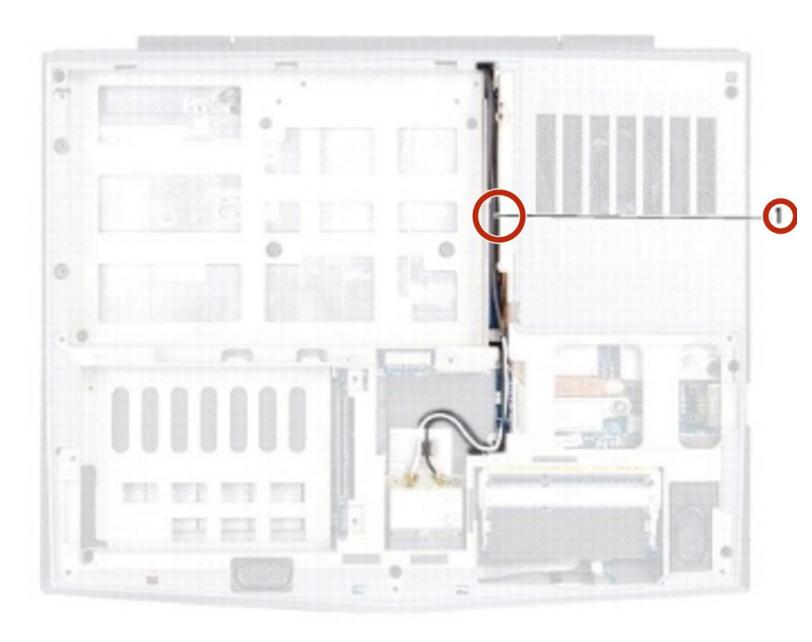

INTRODUCTION


How to remove and replace the Display Assembly.



TOOLS:


• Phillips #0 Screwdriver (1)

Step 1 — Disconnecting Antenna Cable

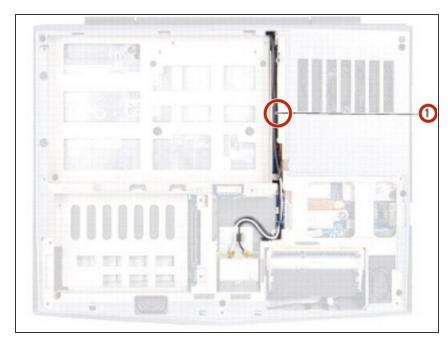


- WARNING: Before working inside your computer, read the safety information that shipped with your computer.
- CAUTION: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).
- Disconnect the antenna cables from the Mini-Card(s).

Step 2 — Removing Mimi Card

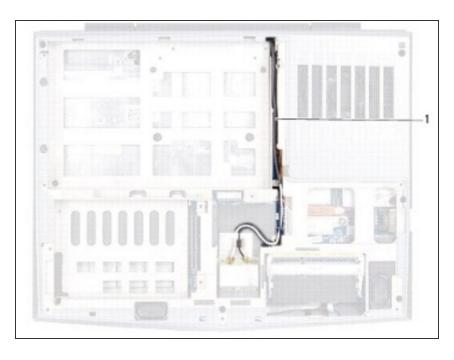


 The routing of the Mini-Card antenna cables and remove them from the routing guides on the computer base.

Step 3 — Turning Over The Computer

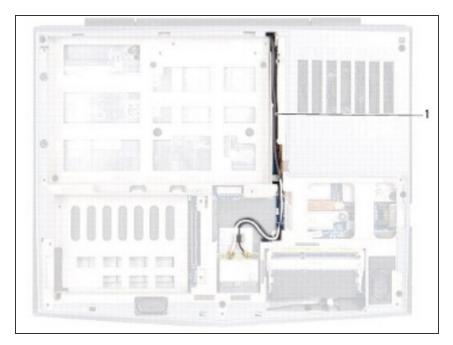

 Turn the computer over and open the display as far as possible.

Step 4 — Pulling The Pull-Tab

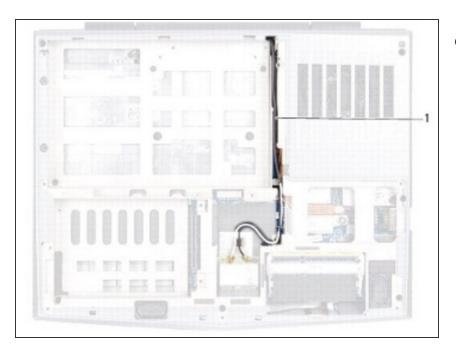


 Pull the pull-tab to disconnect the display cable from the connector on the system board.

Step 5 — Removing Screws



 Remove the four screws that secure the display assembly to the computer base.

Step 6 — Removing Mini-Card cable

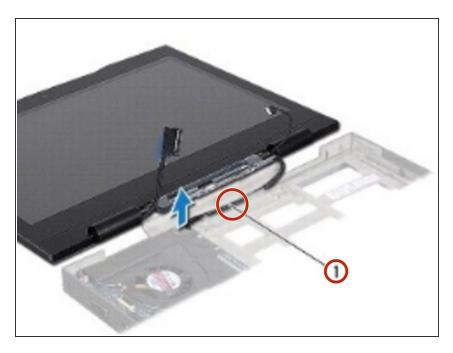


 Gently slide the Mini-Card antenna cables out through the slot on the computer base.

Step 7 — Lifting Display Assembly



 Lift the display assembly off the computer.

Step 8 — Sliding New Cables

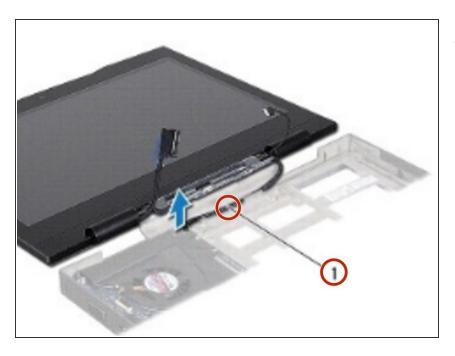


 Slide the antenna cables in through the slot on the computer base.

Step 9 — Securing Screws




 Place the **NEW** display assembly in position and replace the four screws that secure the display assembly to the computer base.

Step 10 — Connecting New Display Cable

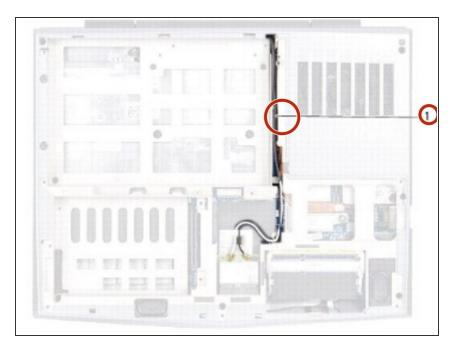


 Connect the display cable to the connector on the system board.

Step 11 — Rerouting The Mini-Card Cable

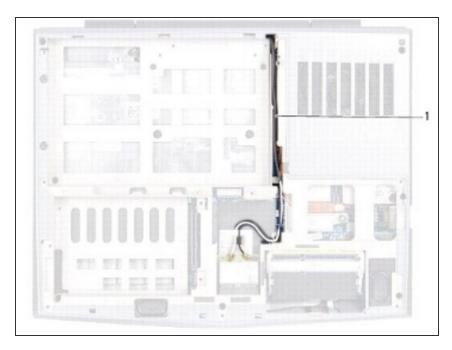

 Turn the computer over and route the Mini-Card antenna cables through the routing guides on the computer base.

Step 12 — Connecting Mini-Card Cables

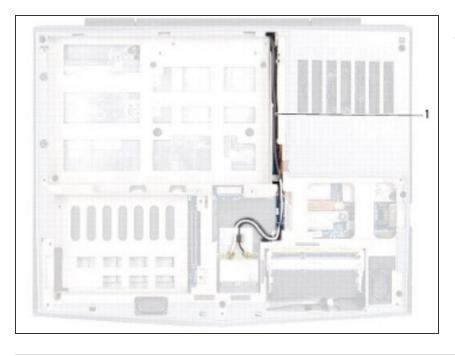

 Connect the Mini-Card antenna cables to the Mini-Card(s).