




# ZTE Lever Loud Speaker Replacement

This guide will show you how to replace the loud speaker on a ZTE Lever smartphone.

Written By: Luke Kilbourne

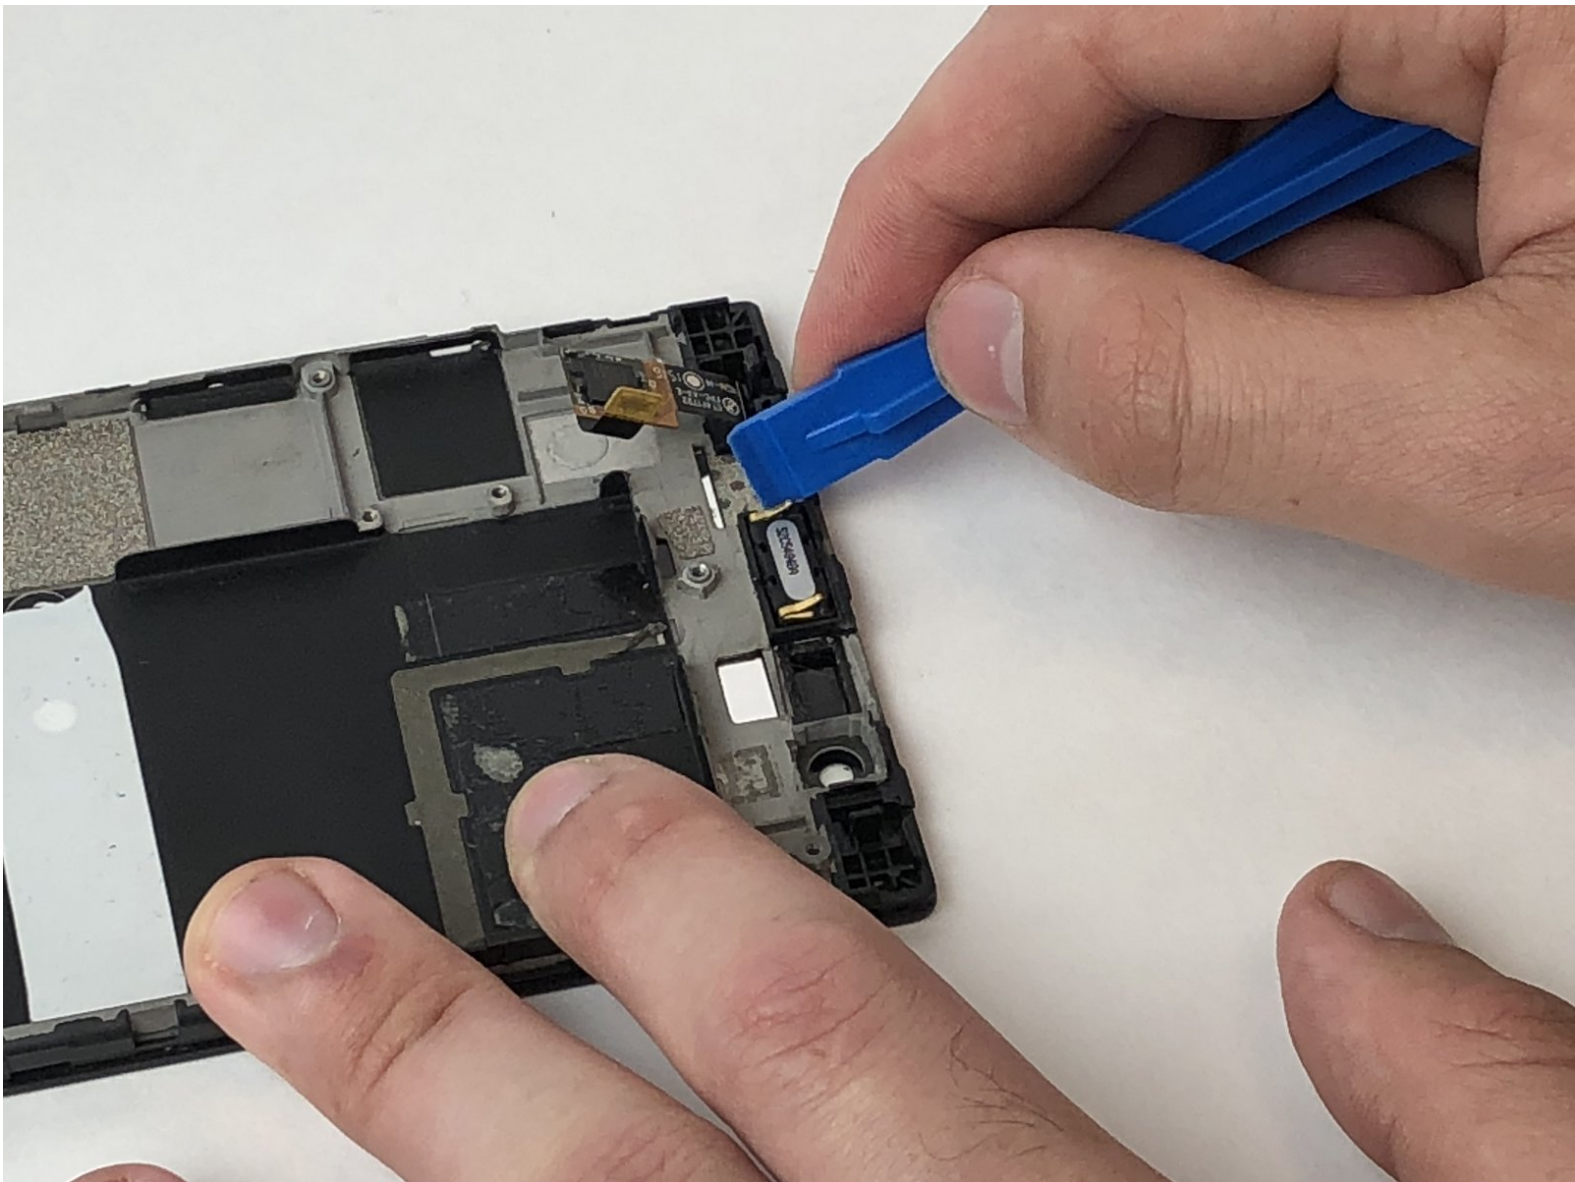

---

# INTRODUCTION

This guide will show you how to replace the loud speaker on a ZTE Lever smartphone.

---



## TOOLS:

- [iFixit Opening Tools](#) (1)
  - [Phillips #0 Screwdriver](#) (1)
  - [iFixit Pro Tech Toolkit](#) (1)
-

## Step 1 — Battery



- Remove the SD card and the Sim card from the device.
- ⓘ The Sim and SD cards are not shown here as our device did not come with them.

## Step 2



- Use an iFixit opening tool to separate the back from the device.



## Step 3



- Remove the two 1.6mm Phillips #0 screws from the battery plug cover.
- Remove the cover.

## Step 4



- Disconnect the battery cable from the motherboard with a plastic opening tool.

## Step 5



- Use your hands, or a plastic opening tool, to pry the battery from the phone.

## Step 6 — Volume Buttons



- Remove the three 1.6mm Phillips #0 screws from the plastic cover on the motherboard.




## Step 7





- Remove the top plastic motherboard cover using a plastic opening tool.

## Step 8

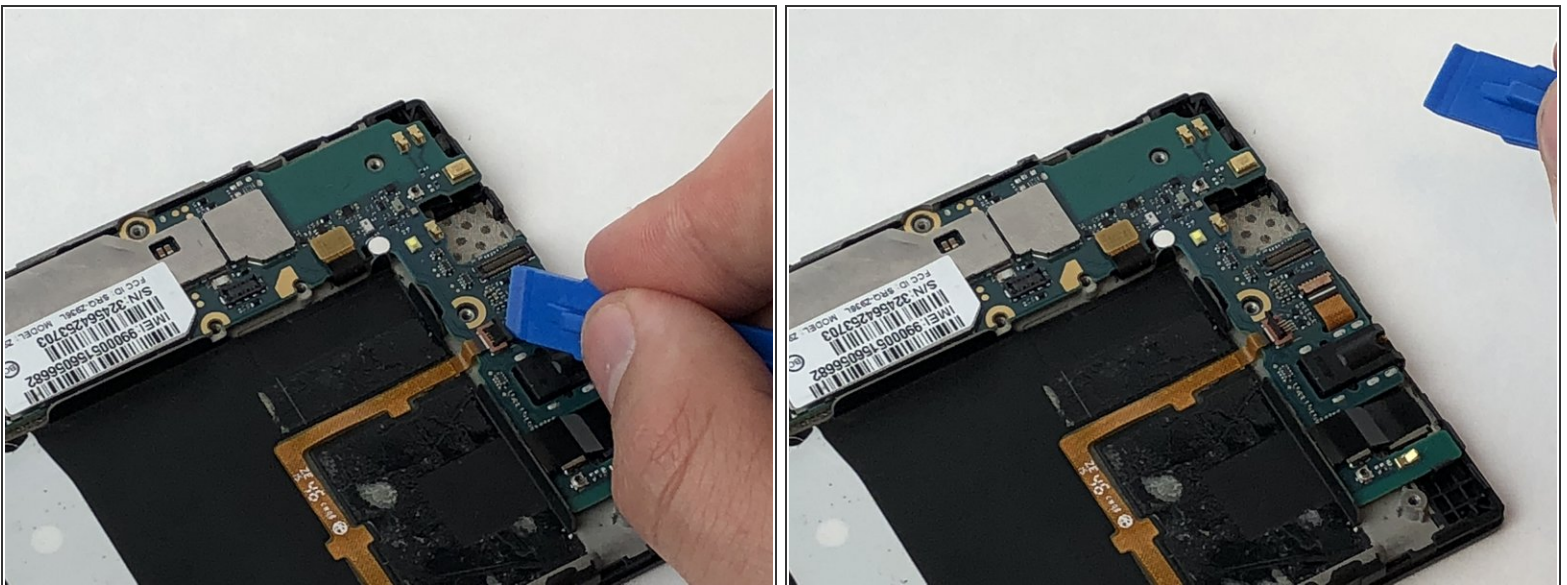

- Use a plastic opening tool to flip up the retaining flap on the volume ribbon cable [ZIF](#) socket.

## Step 9

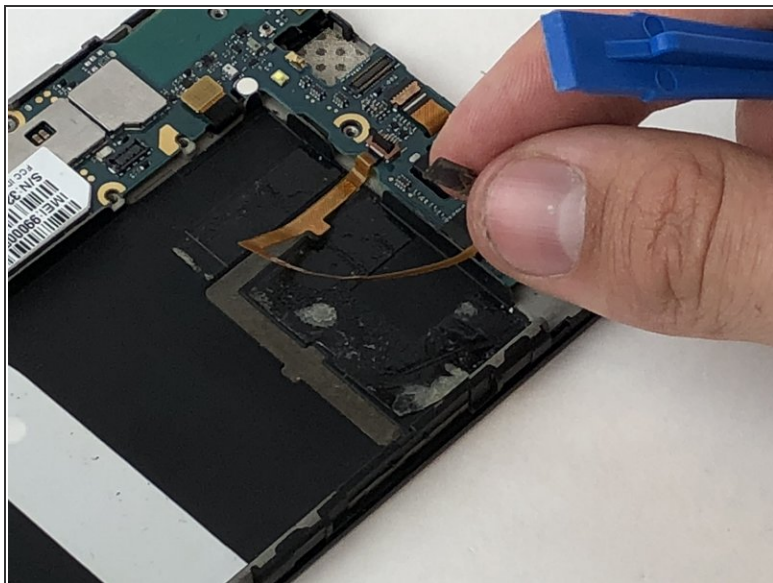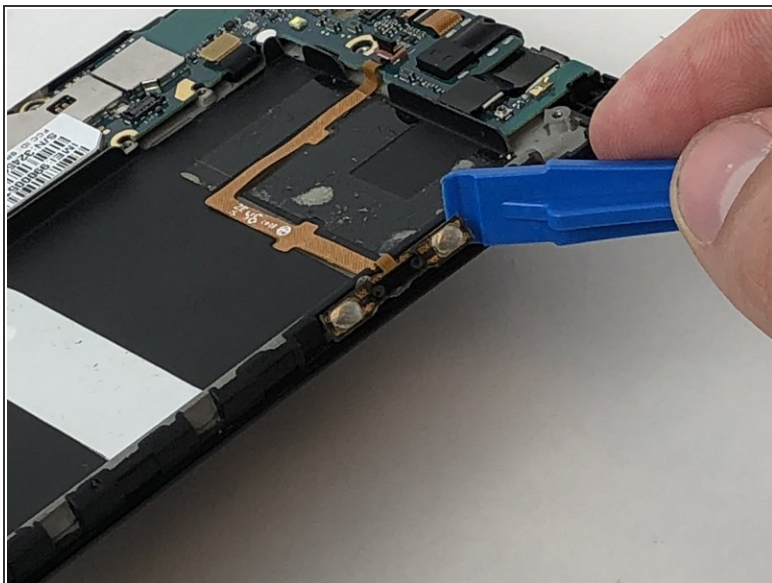

- Peel up the volume button cable from the phone with hands, or plastic opening tool.


## Step 10 — Power Button



- Disconnect the power button from the motherboard with a plastic opening tool.



## Step 11

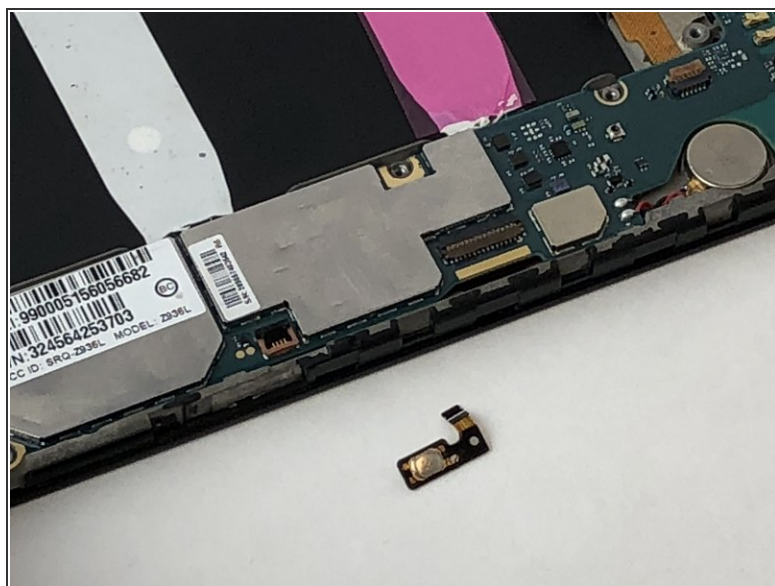

- Peel the power button cable up from the phone with you hands, or a plastic opening tool.


## Step 12 — Motherboard



- Remove the seven 1.6mm Phillips #0 screws from the plastic cover on the bottom of the motherboard.




## Step 13

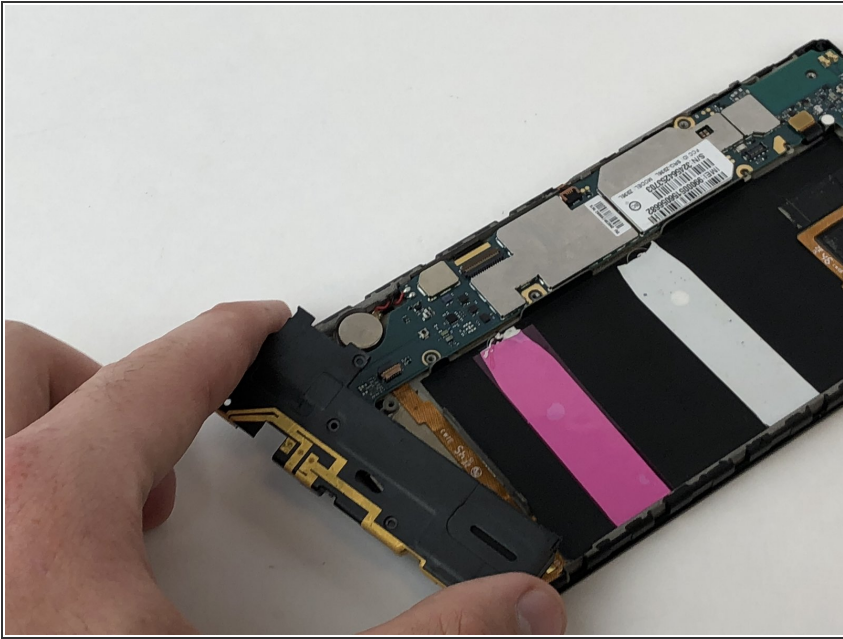


- Remove the bottom plastic motherboard cover with your fingers

## Step 14

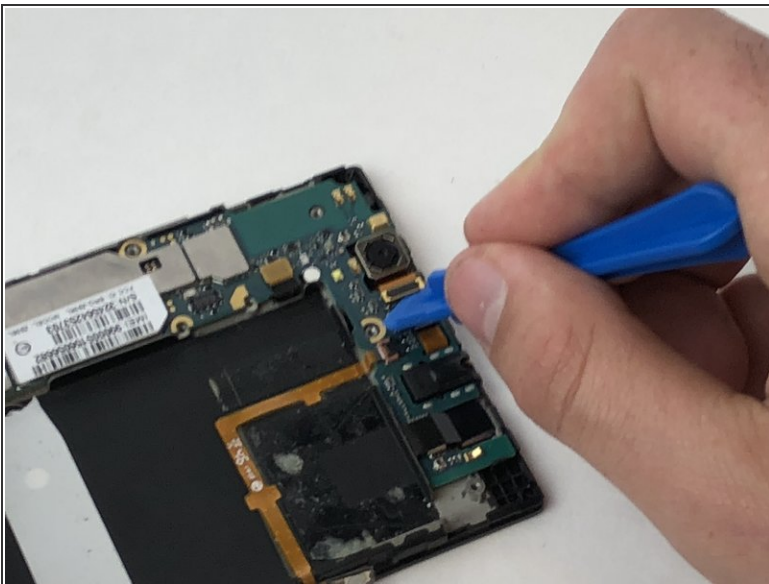




- Disconnect the camera from the motherboard with a plastic opening tool.

## Step 15

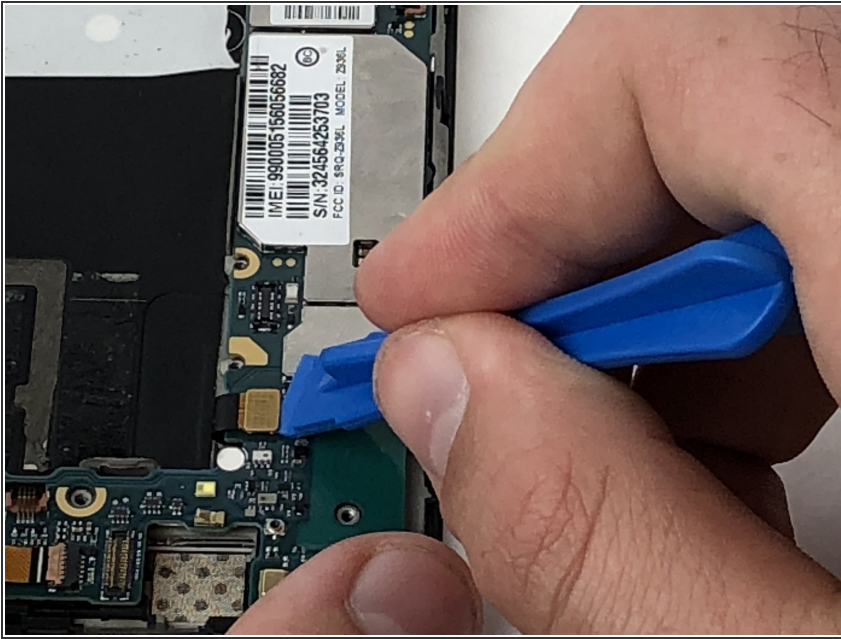


- Disconnect the display cable from the motherboard with a plastic opening tool.

## Step 16

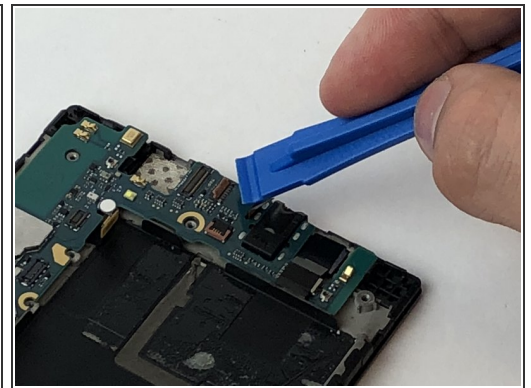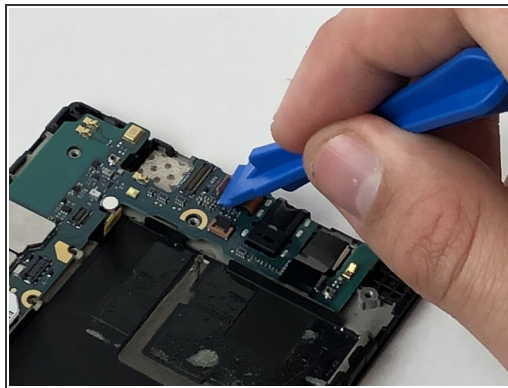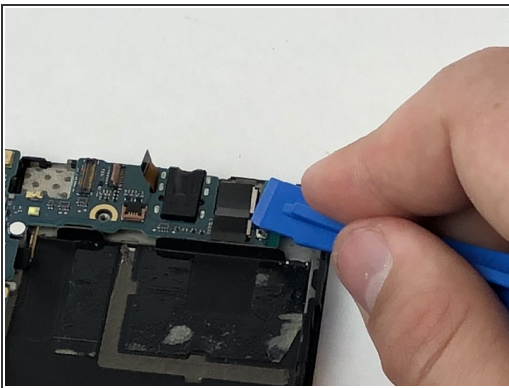


- Disconnect the camera from the motherboard with a plastic opening tool.

## Step 17

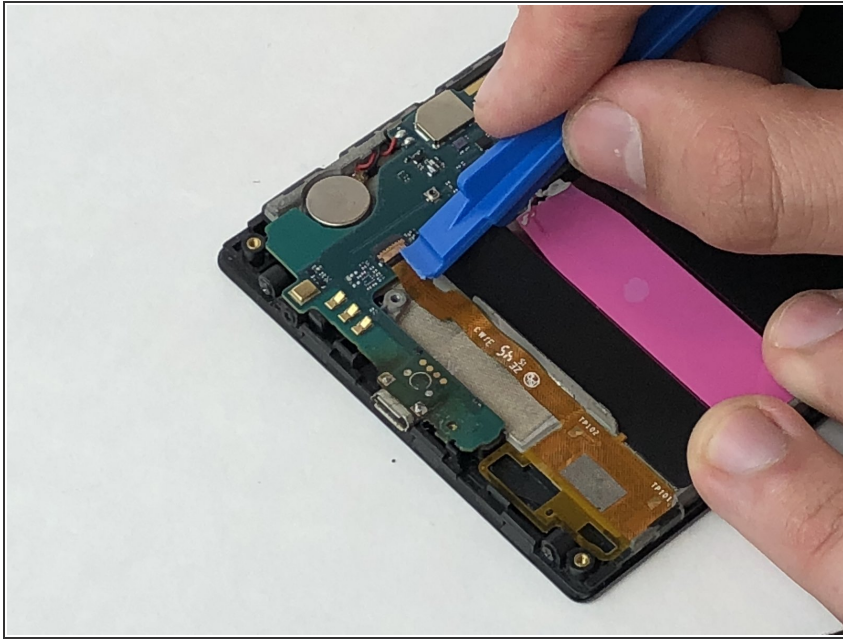

- Disconnect the rear speaker cable from the motherboard with a plastic opening tool.


## Step 18

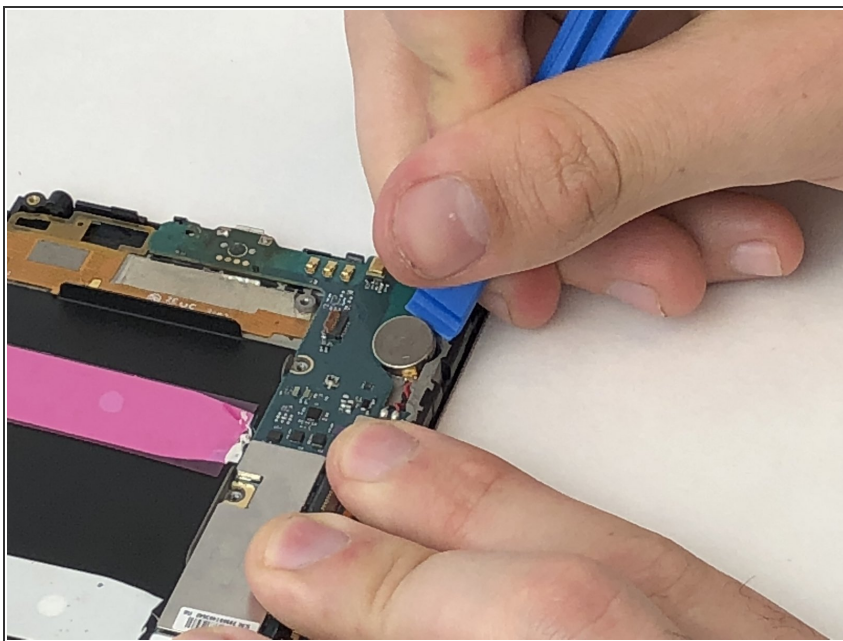

- Pry the motherboard cell battery from its position on the case of the phone




## Step 19

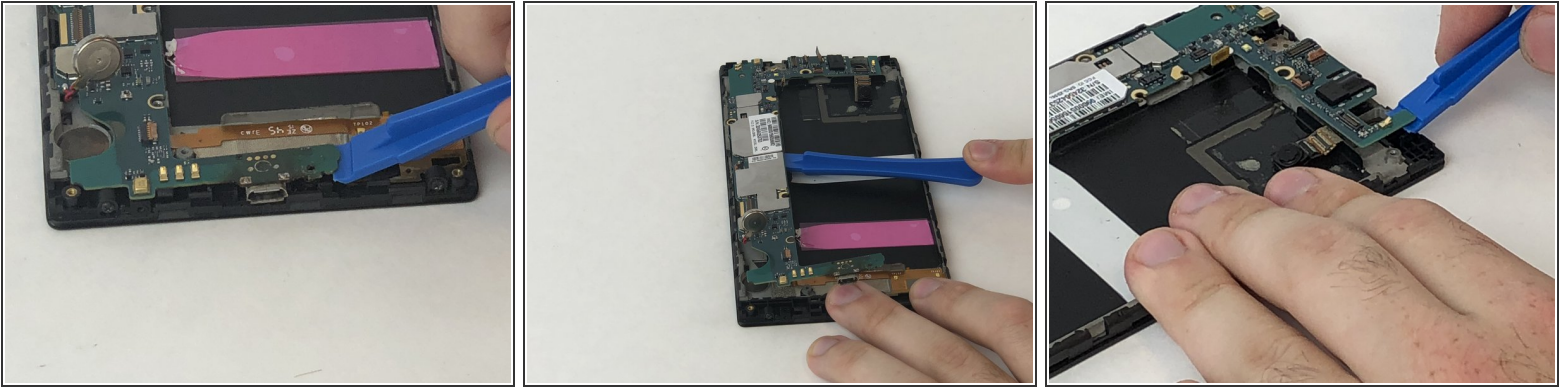



- Using the plastic opening tool, pry the motherboard up, sliding along the edge to separate the pieces.

## Step 20

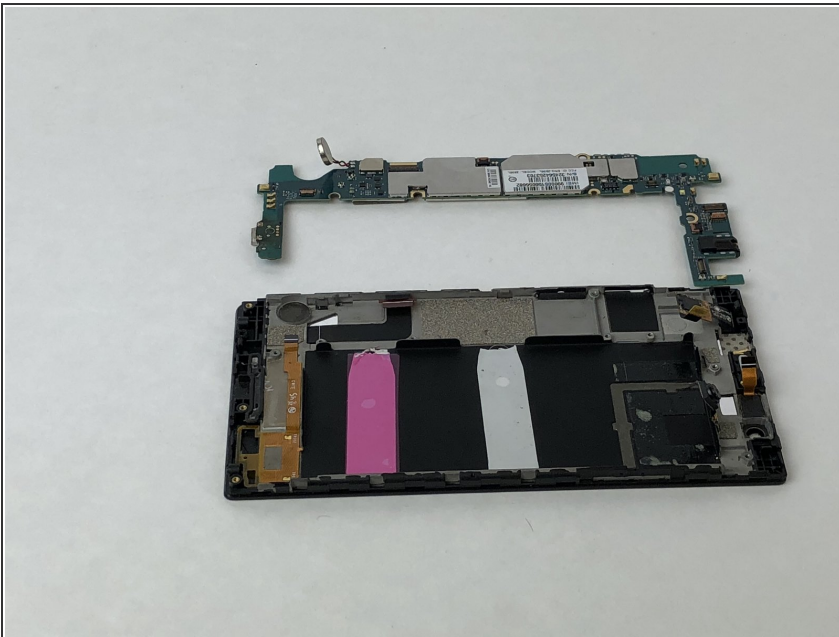

- Remove the motherboard with your fingers.

## Step 21 — Loud Speaker

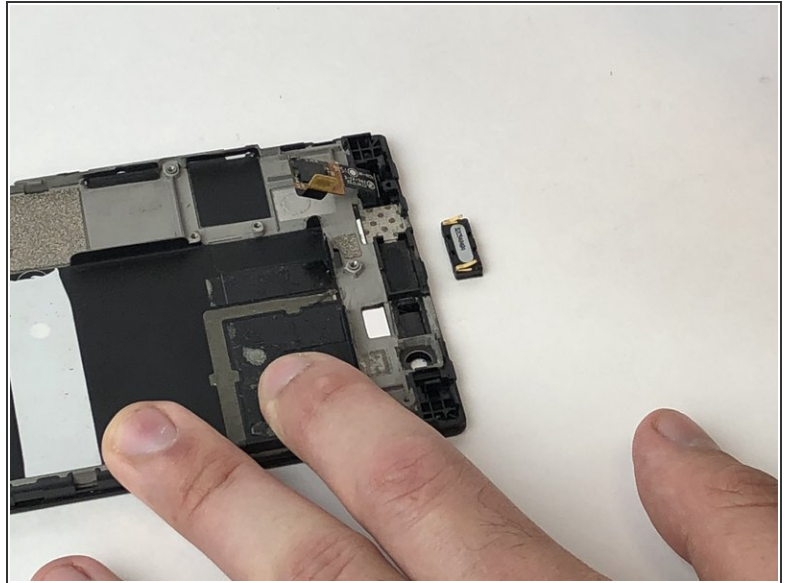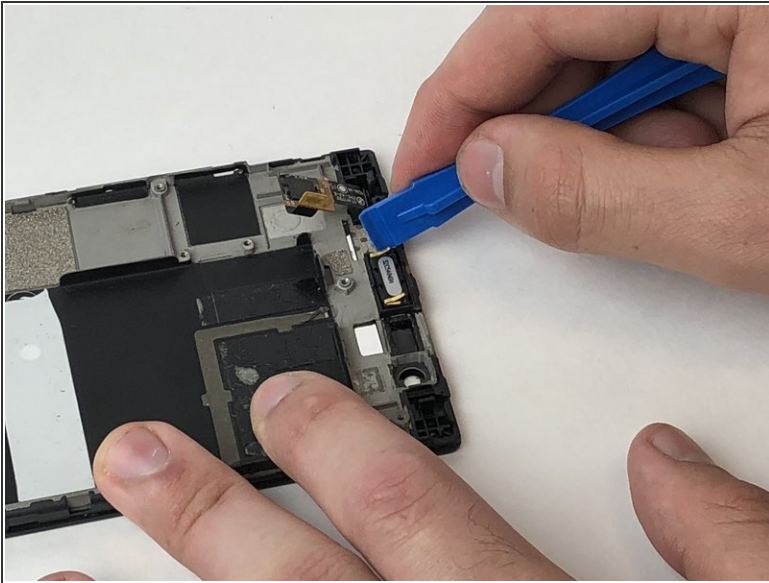

- Using the plastic opening tool, remove the speaker.

To reassemble your device, follow these instructions in reverse order.