




IdeaPad Yoga 13 Charging Port Replacement

This guide will teach you how to remove the charging port in your IdeaPad Yoga 13.

Written By: Kaitlyn Johnson

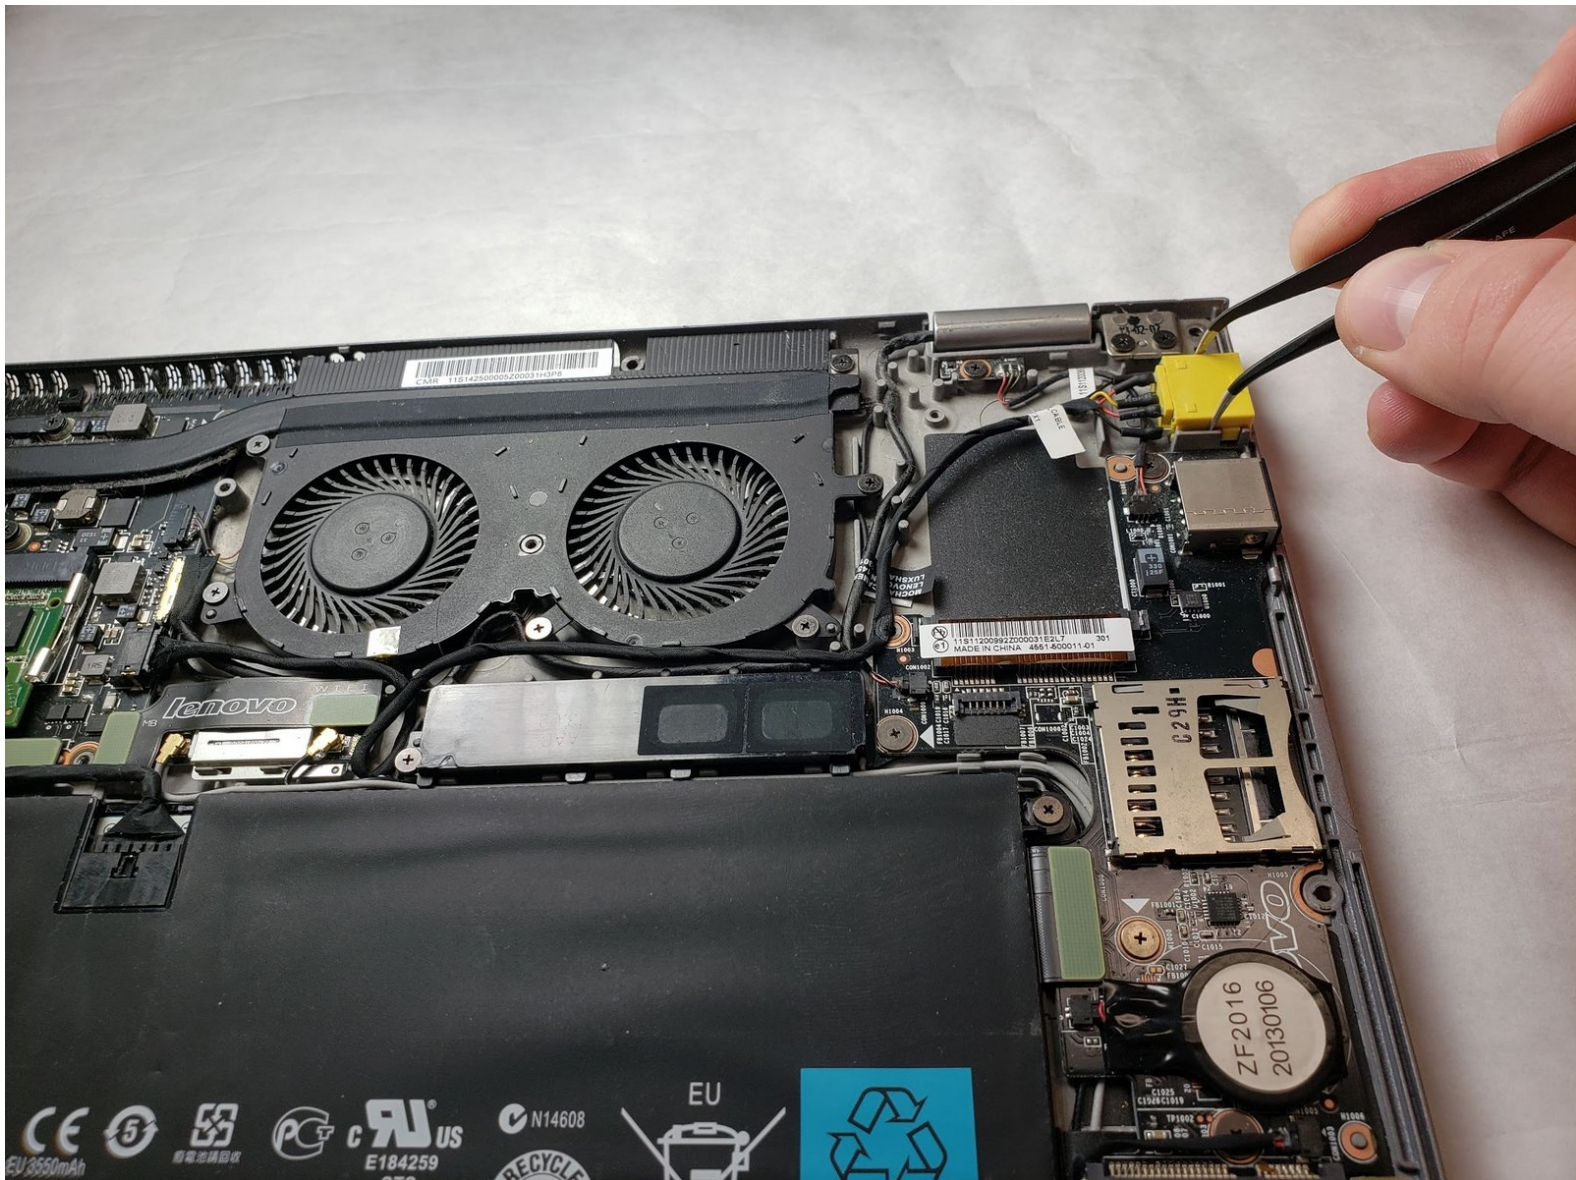

INTRODUCTION


Simple guide to disassembling the keyboard down to the motherboard. In detail explains how to successfully replace the charging port.



TOOLS:


- [Metal Spudger](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Tweezers](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
 - [T4 Torx Screwdriver](#) (1)
-

Step 1 — Charging Port

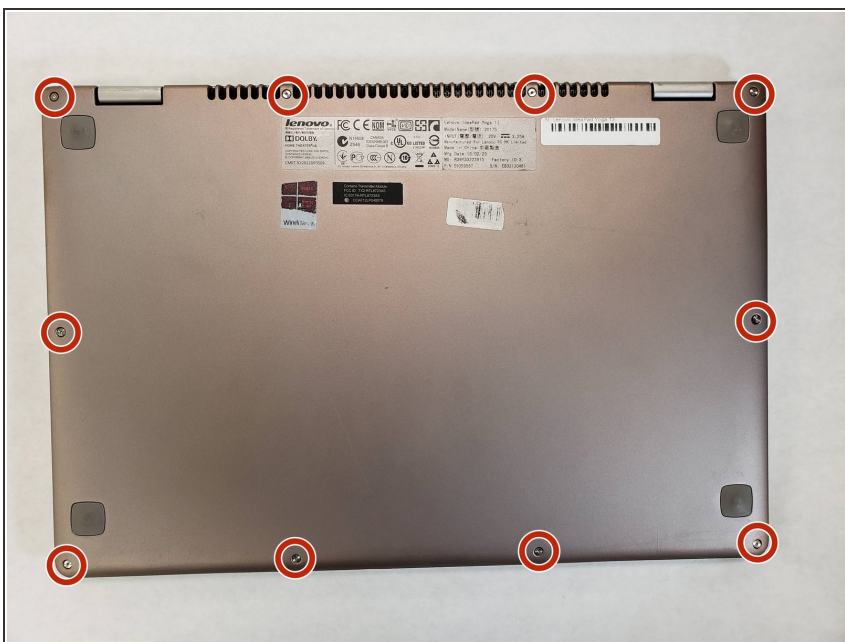


- Remove all ten screws using the T4 Torx screwdriver.
- Remove the back cover from the device.

Step 2

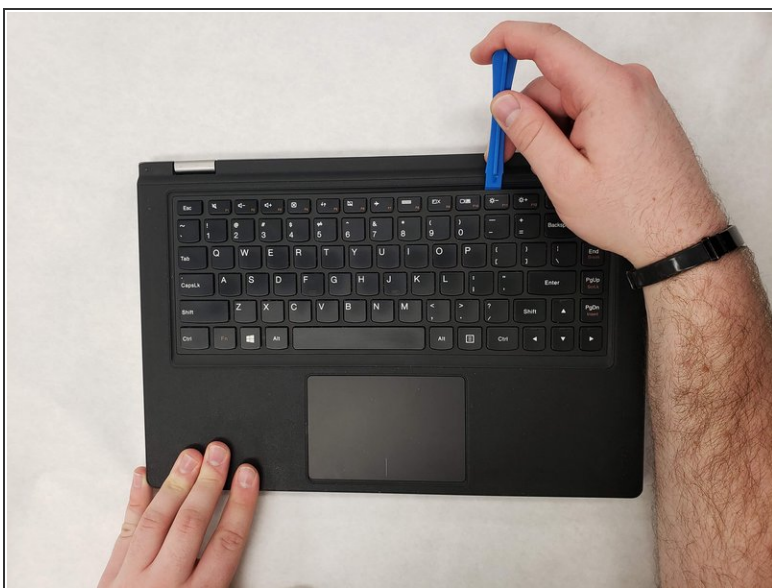



- Use the blue opening tool to further separate the keyboard bezel.
- Carefully apply pressure to the keyboard. It should easily pop out.

Step 3

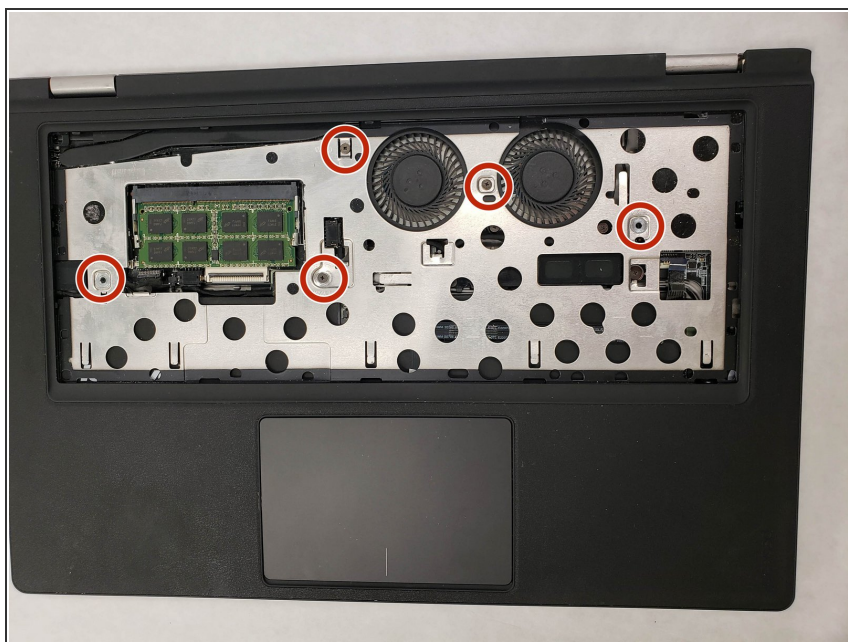


- To remove the keyboard bezel, unscrew and remove the five screws using the Phillips #0 screwdriver.

Step 4

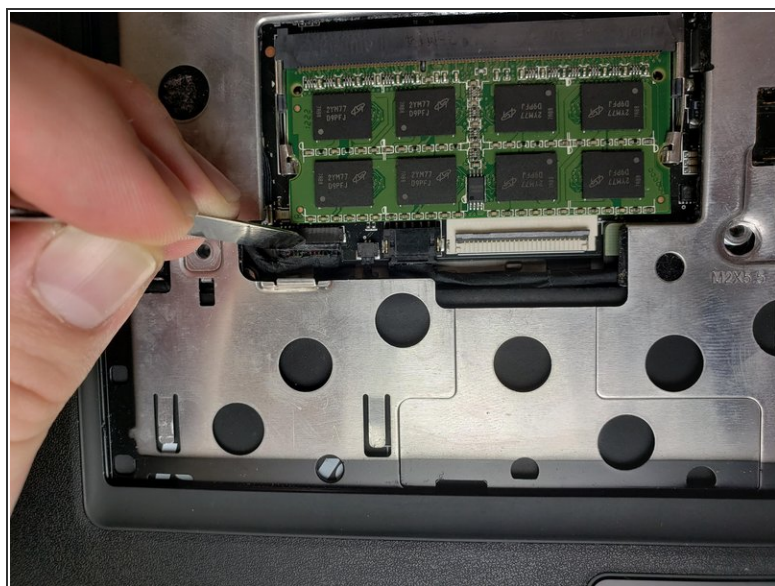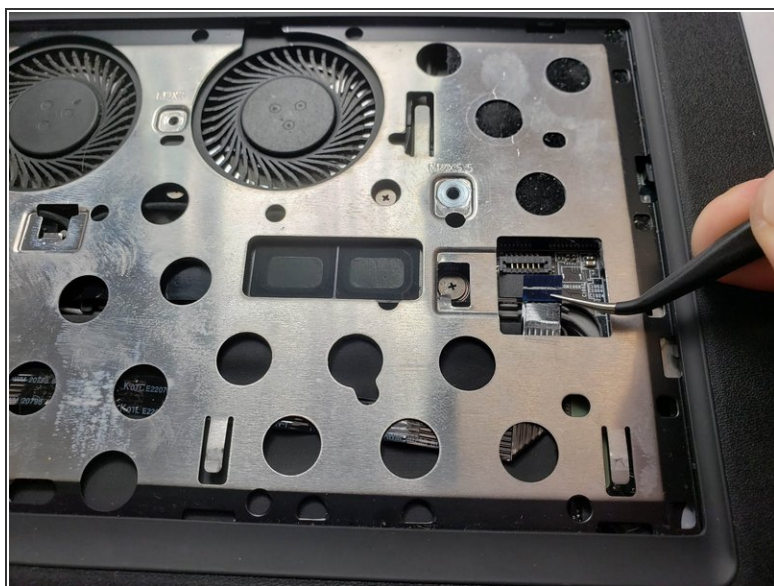




- Unplug the connections from the motherboard.
- There is a different connection for the mouse and keyboard.

Step 5

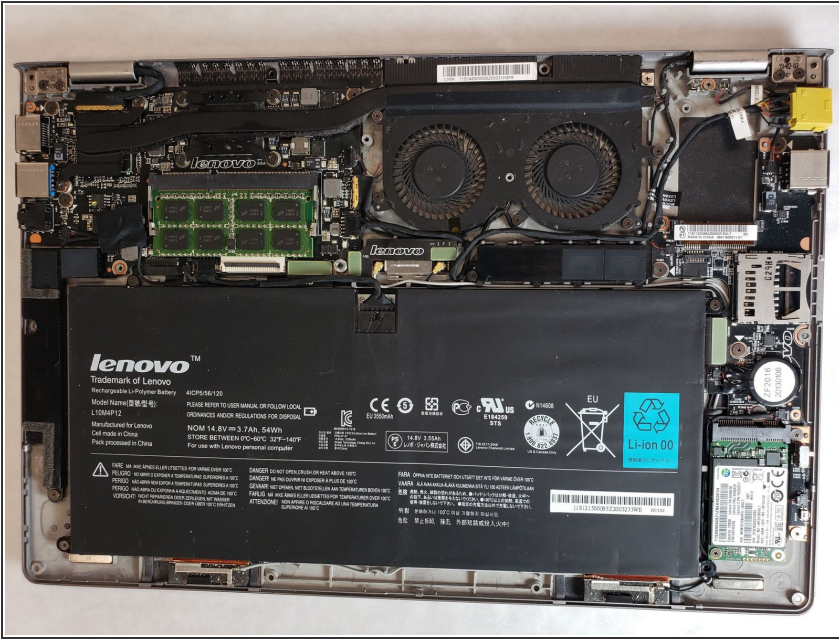

- Remove the outer bezel to reveal the entire internal layout of the computer.
- Motherboard and other internal components are now exposed.

Step 6

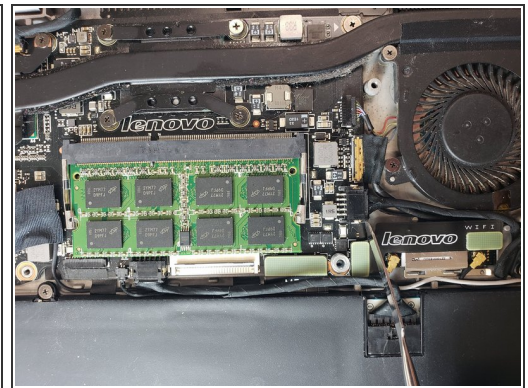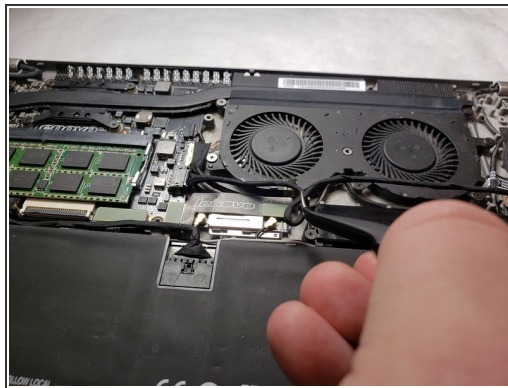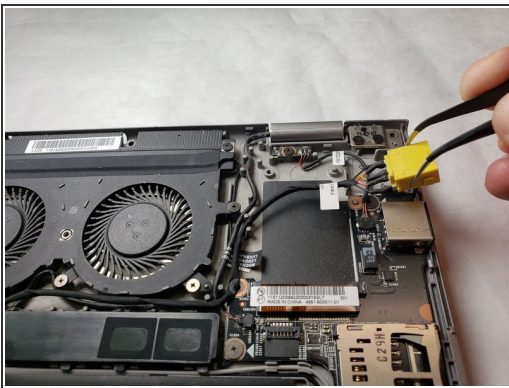

- Remove charging port by prying out the yellow port from the computer chassis.
- Note the route of the cable for re-installation of the replacement.

To reassemble your device, follow these instructions in reverse order.