




# Teenage Engineering OP-Z Expansion Module Replacement

How to remove the expansion module in the OP-Z.


Written By: Tobias Isakeit

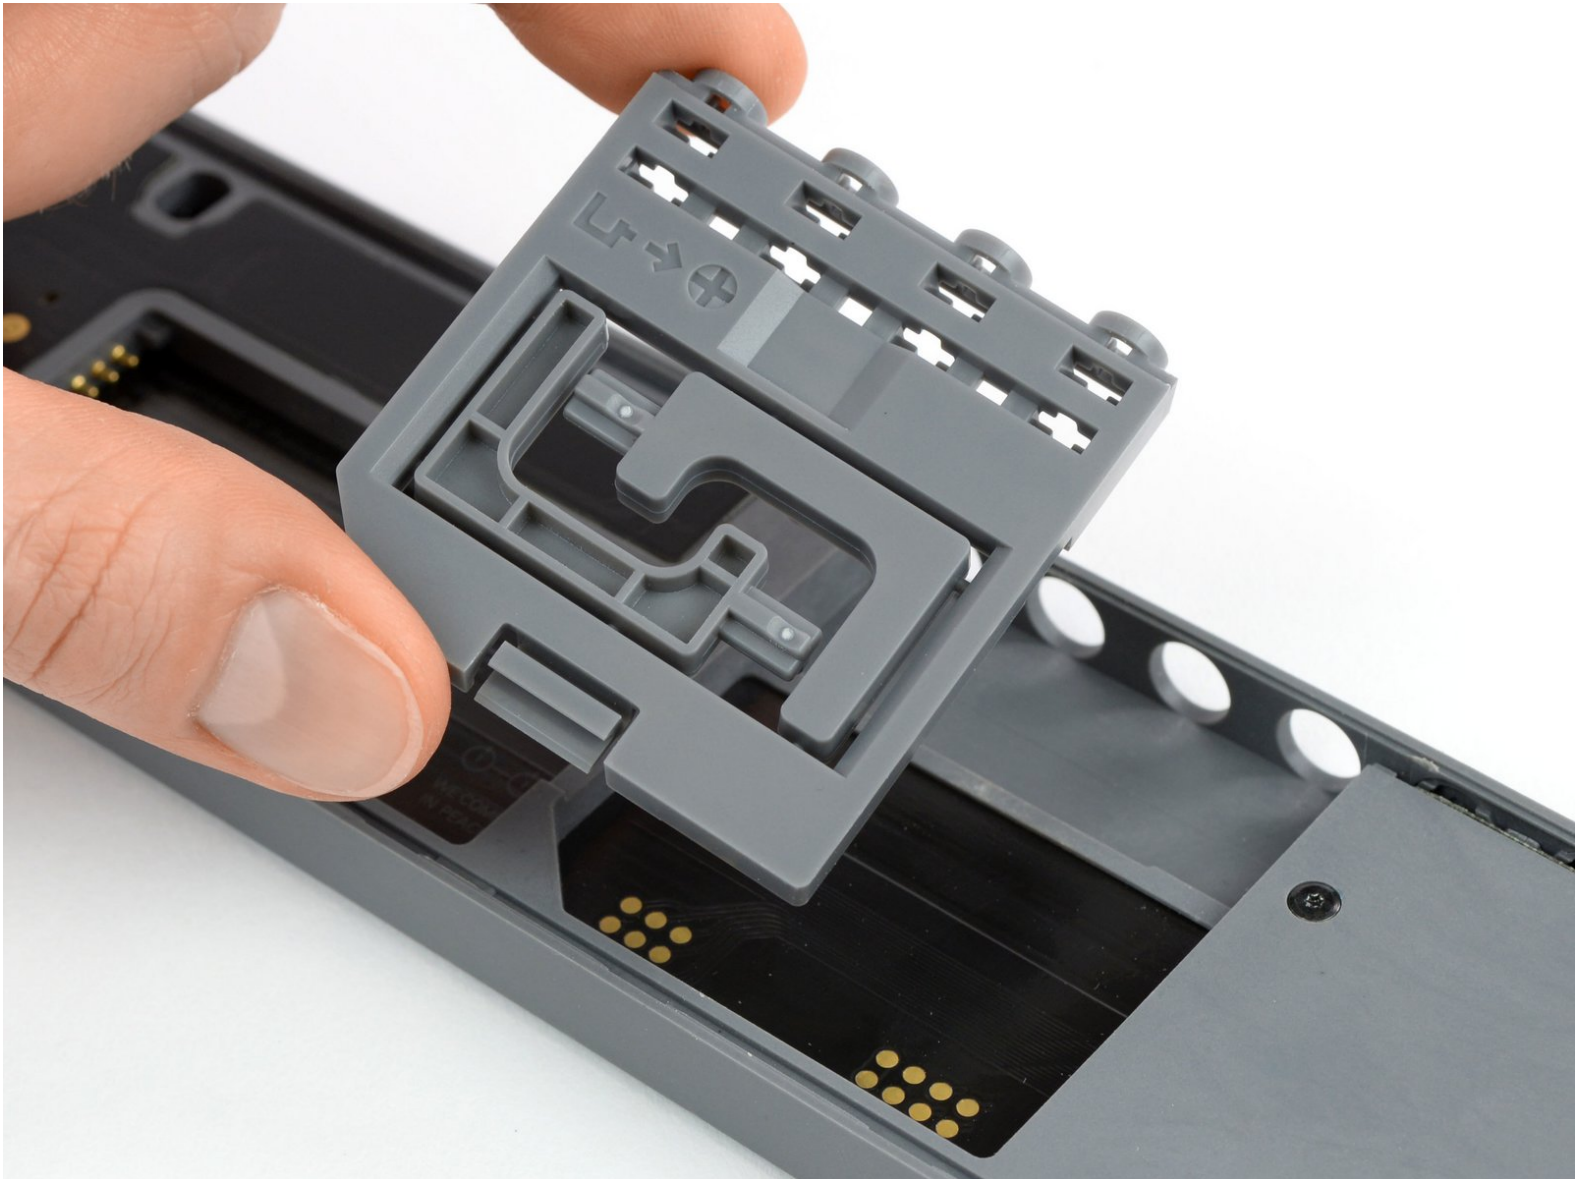

# INTRODUCTION


Use this guide to remove the expansion module in the OP-Z.

## Step 1 — Back Cover

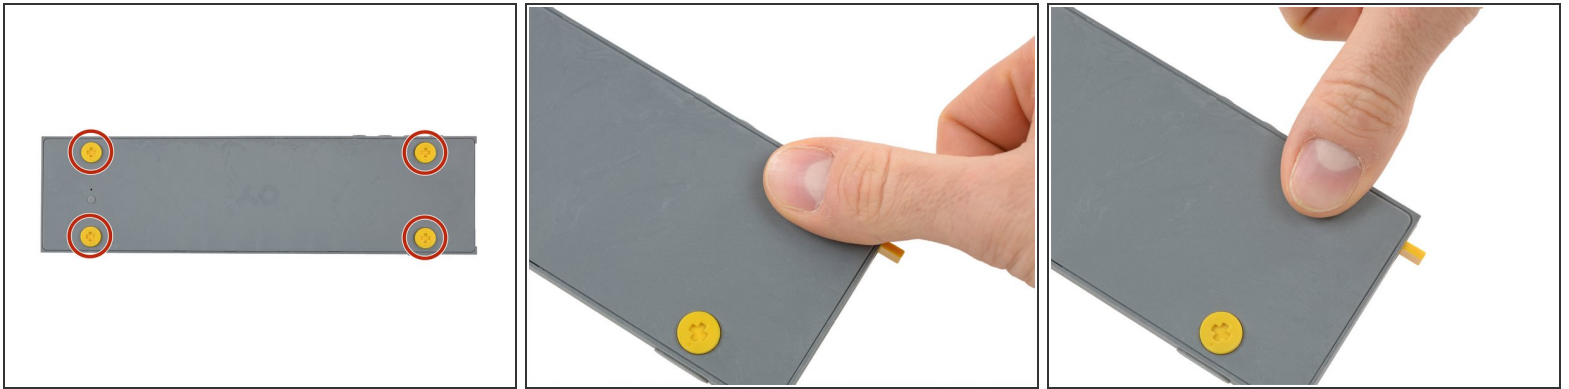

- Unlock the four rubber feet by turning them 90° counterclockwise using your thumb or finger tip.
- ❗ There is a tiny mark on every foot facing the bottom edge of the OP-Z. After turning them they should face towards the short edge where the on/off switch is.

## Step 2

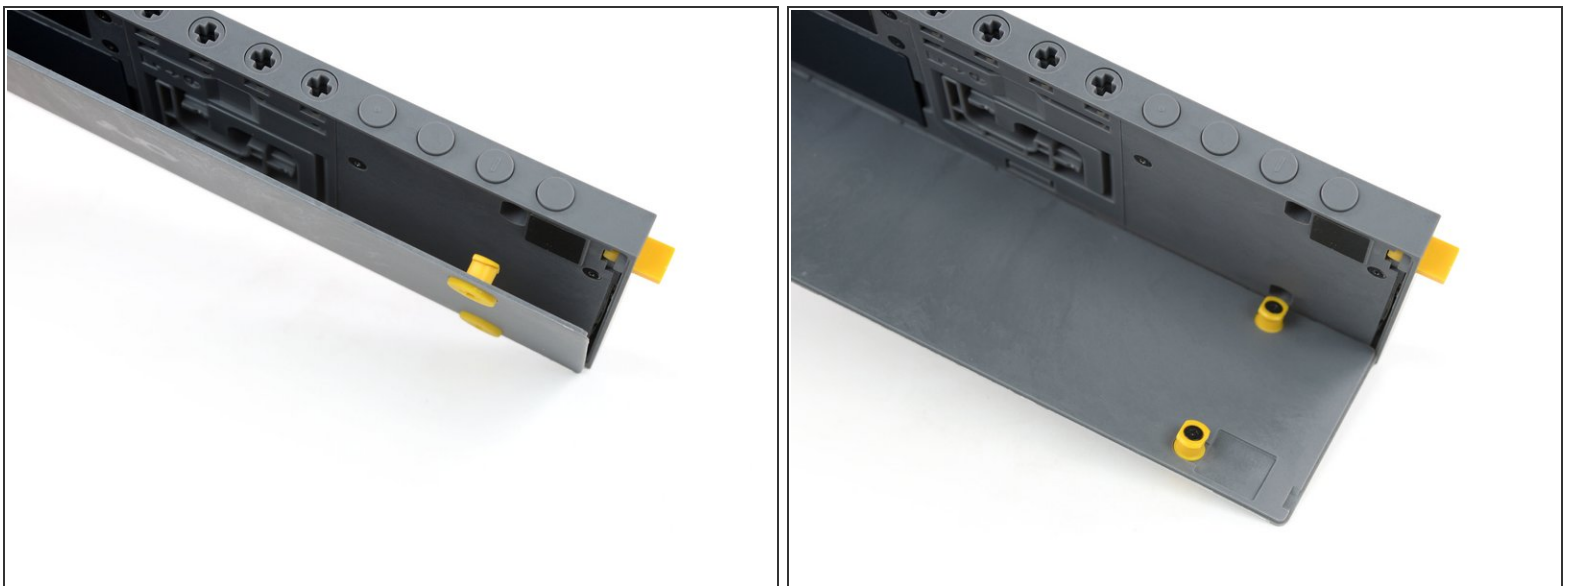

- When turning the OP-Z over again the bottom plate should come off by itself (thanks gravity).
- ❗ If the bottom plate won't come off you might want to make sure every foot is rotated correctly and gently tug on one of them.

### Step 3




- Remove the bottom plate including the rubber feet.

### Step 4 — Expansion Module



- Use your finger or a spudger to push up on the small tab on the bottom of the module.
- Lift the module up and out of its recess bottom first.

## Step 5

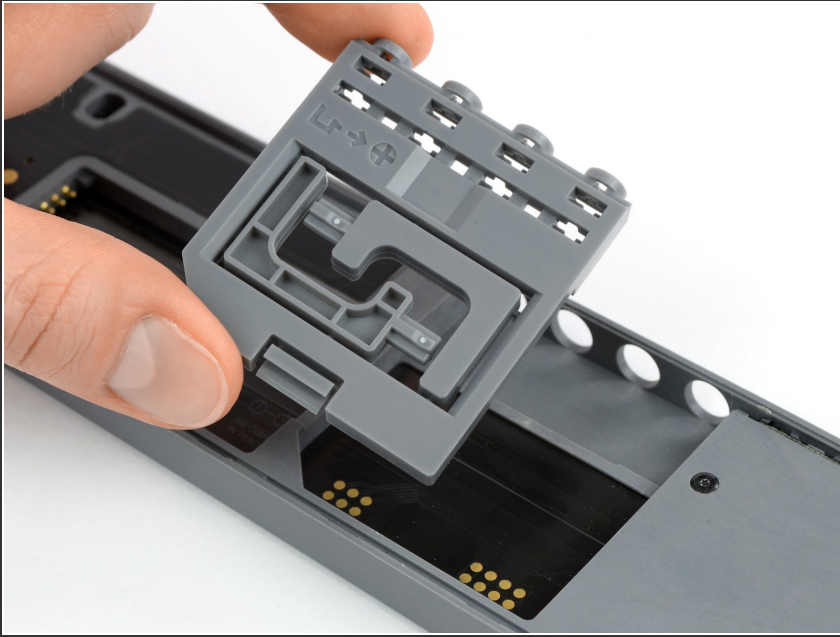

- Remove the module.
- ★ When inserting another module make sure you put it in outputs first. Then push down the bottom part for the tab to engage.

To reassemble your device, follow these instructions in reverse order.