



CyberPowerPC Fangbook MS-1763 Back Cover Replacement

Following this guide will allow you to open up the inside of the computer. This is done from the bottom of the laptop.

Written By: Brian Chaffin






TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Back Cover

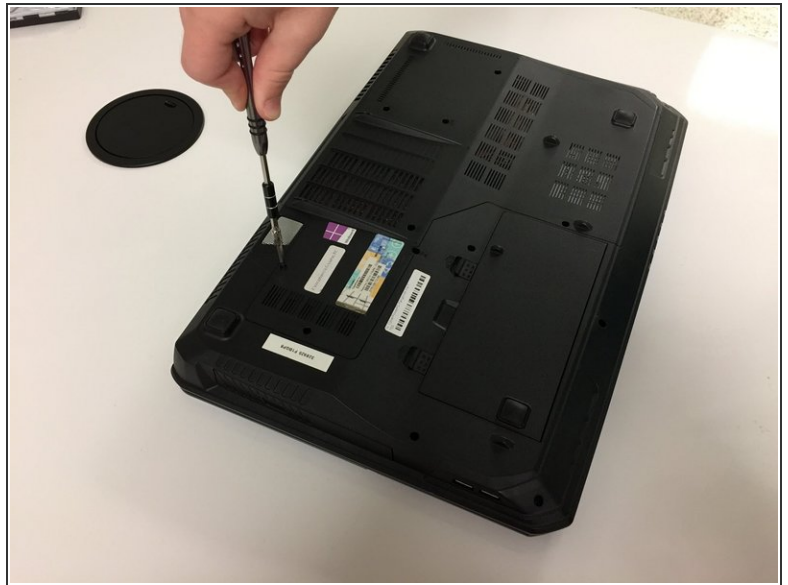

- Turn the laptop so the back is facing up.
- Use a Phillips #00 screwdriver to remove the seven screws from the bottom cover. These will require a counter-clockwise rotation to remove. A magnet may be helpful to remove screws if they get stuck at the bottom of their inserts.
- ① Find a place to safely keep loose screws. There are seven in total, all the same length - black in color.

Step 2



- i** With all screws removed (and safely put aside), you may begin removing the cover. A plastic flat object can help doing this. Note that more force will be required than you might expect
- Start by pulling up on the lip, highlighted in Red. This will be at the back of the computer.
 - Once the back has been lifted up, begin lifting up at the orange side on the left. This will be right next to the back we just pulled up. The right side should come loose at this time; pull up on it as well
 - Lift and pull on the yellow edge, on the opposite side of the first part we pulled up on. Once this is removed, lift the panel off the computer.
- i** In the steps, the colors mentioned to pull on align with the colors shown on the image. "Pull on the yellow edge" means to pull on the edge marked in yellow on the image

To reassemble your device, follow these instructions in reverse order.