


# **Dell Vostro 1310 Memory Module Replacement**


Written By: Johnathan Hammond

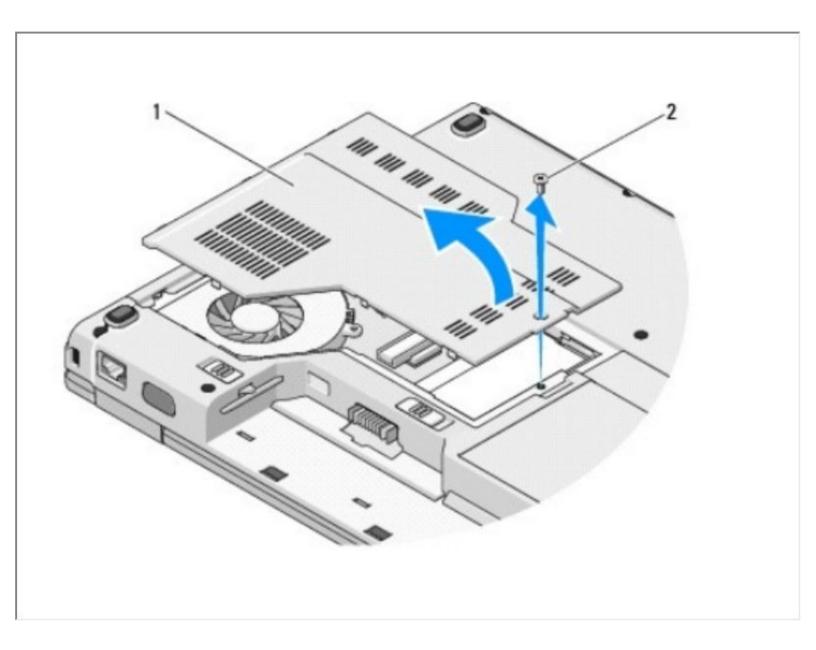

## F TOOLS:


• Phillips #0 Screwdriver (1)

#### Step 1 — Battery

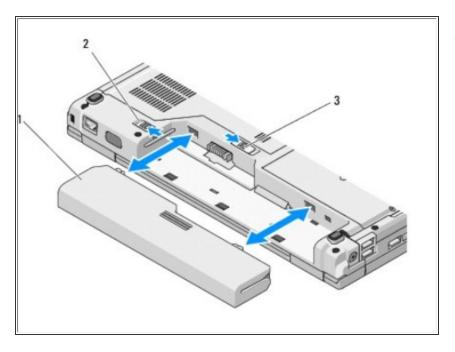


- Slide the battery lock to the open position. {2}
  - Slide the battery latch release to the open position. (You may need to hold the latch release in the open position while removing the battery.){3}
    - Slide the battery out of the battery bay. {1}

#### Step 2 — Memory Module

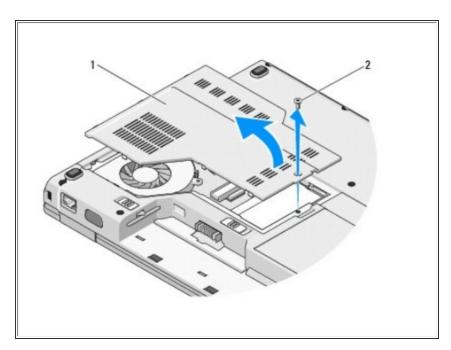

• Remove the M2.5 x 5-mm screw that secures the memory cover, and remove the cover and set it aside.

### Step 3

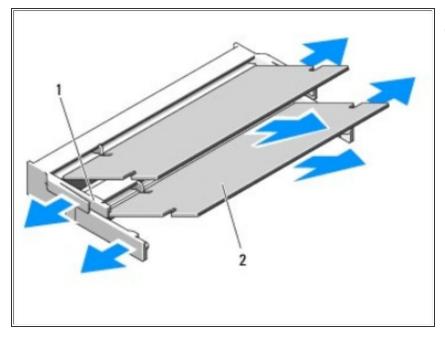

- (i) NOTICE: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.
  - Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.
    - Remove the memory module from the connector.

To reassemble your device, follow these instructions in reverse order.