

Dell Inspiron 11z-1121 Memory Modules Replacement

Written By: Terrence15



INTRODUCTION


In this guide, we will show you how to remove and replace the Memory Modules.



TOOLS:


• Phillips #0 Screwdriver (1)

Step 1 — Loosen the Screw

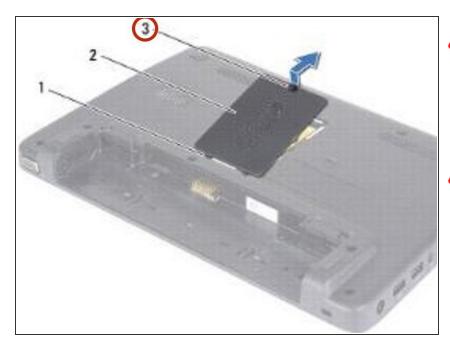


- MARNING: Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in Before You Begin.
- CAUTION: To avoid electrostatic discharge, ground yourself by using a wrist grounding strap or by periodically touching an unpainted metal surface (such as a connector on your computer).
- Loosen the captive screw that secures the memory-module cover to the computer base.

Step 2 — Lifting the Memory-Module Cover

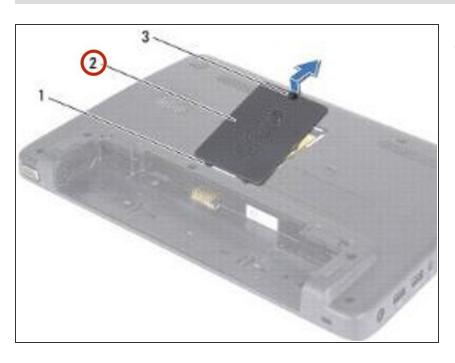


 Lift the memory-module cover off the computer base.

Step 3 — Popping up the Memory Module

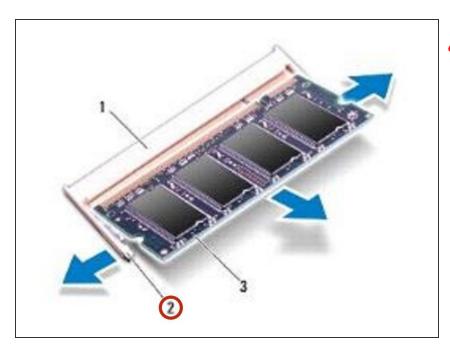


- ↑ CAUTION: To prevent damage to the memory module connector, do not use tools to spread the memory module securing clips.
- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the memory module pops up.

Step 4 — Removing the Memory Module

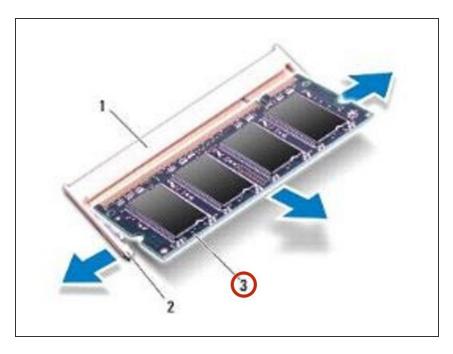


 Remove the memory module from the memory-module connector.


Step 5 — Align the Notch

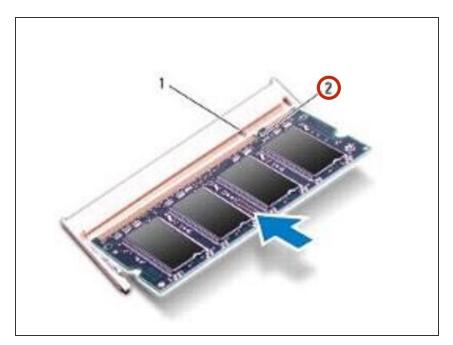

 Align the notch in the **NEW** memory module with the tab in the memorymodule connector.


Step 6 — Sliding the Memory Module

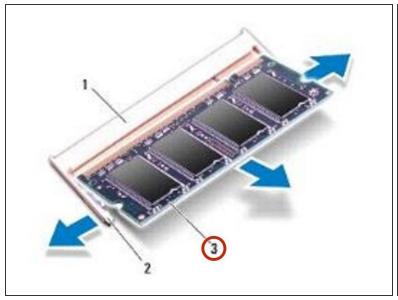

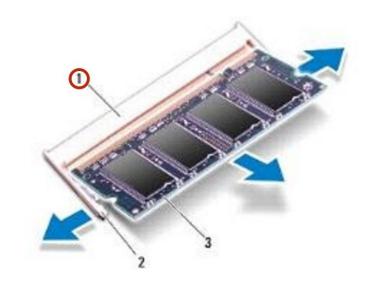


- Slide the memory module firmly into the memory-module connector at a 45-degree angle, and press the memory module down until it clicks into place. If you do not hear the click, remove the memory module and reinstall it.
- (i) NOTE: If the memory module is not installed properly, the computer may not boot.

Step 7 — Sliding the Tabs

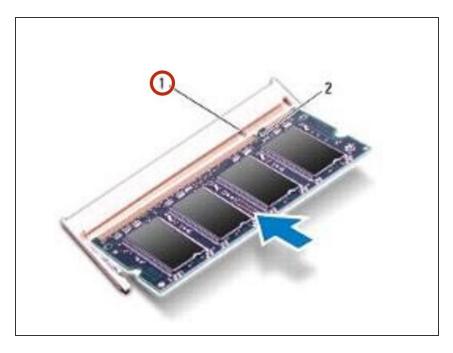

 Slide the tabs on the memorymodule cover into the slots on the computer base and gently press the memory-module cover into place.

Step 8 — Tighten the Screw

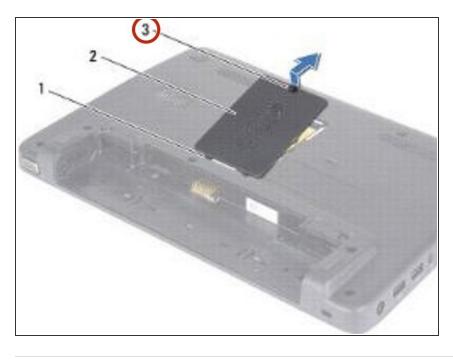

 Tighten the screw that secures the memory-module cover to the computer base.

To reassemble your device, follow these instructions in reverse order.