




Dell Inspiron N4110 Fan Replacement

This guide helps replace the fan if the...

Written By: Olivia

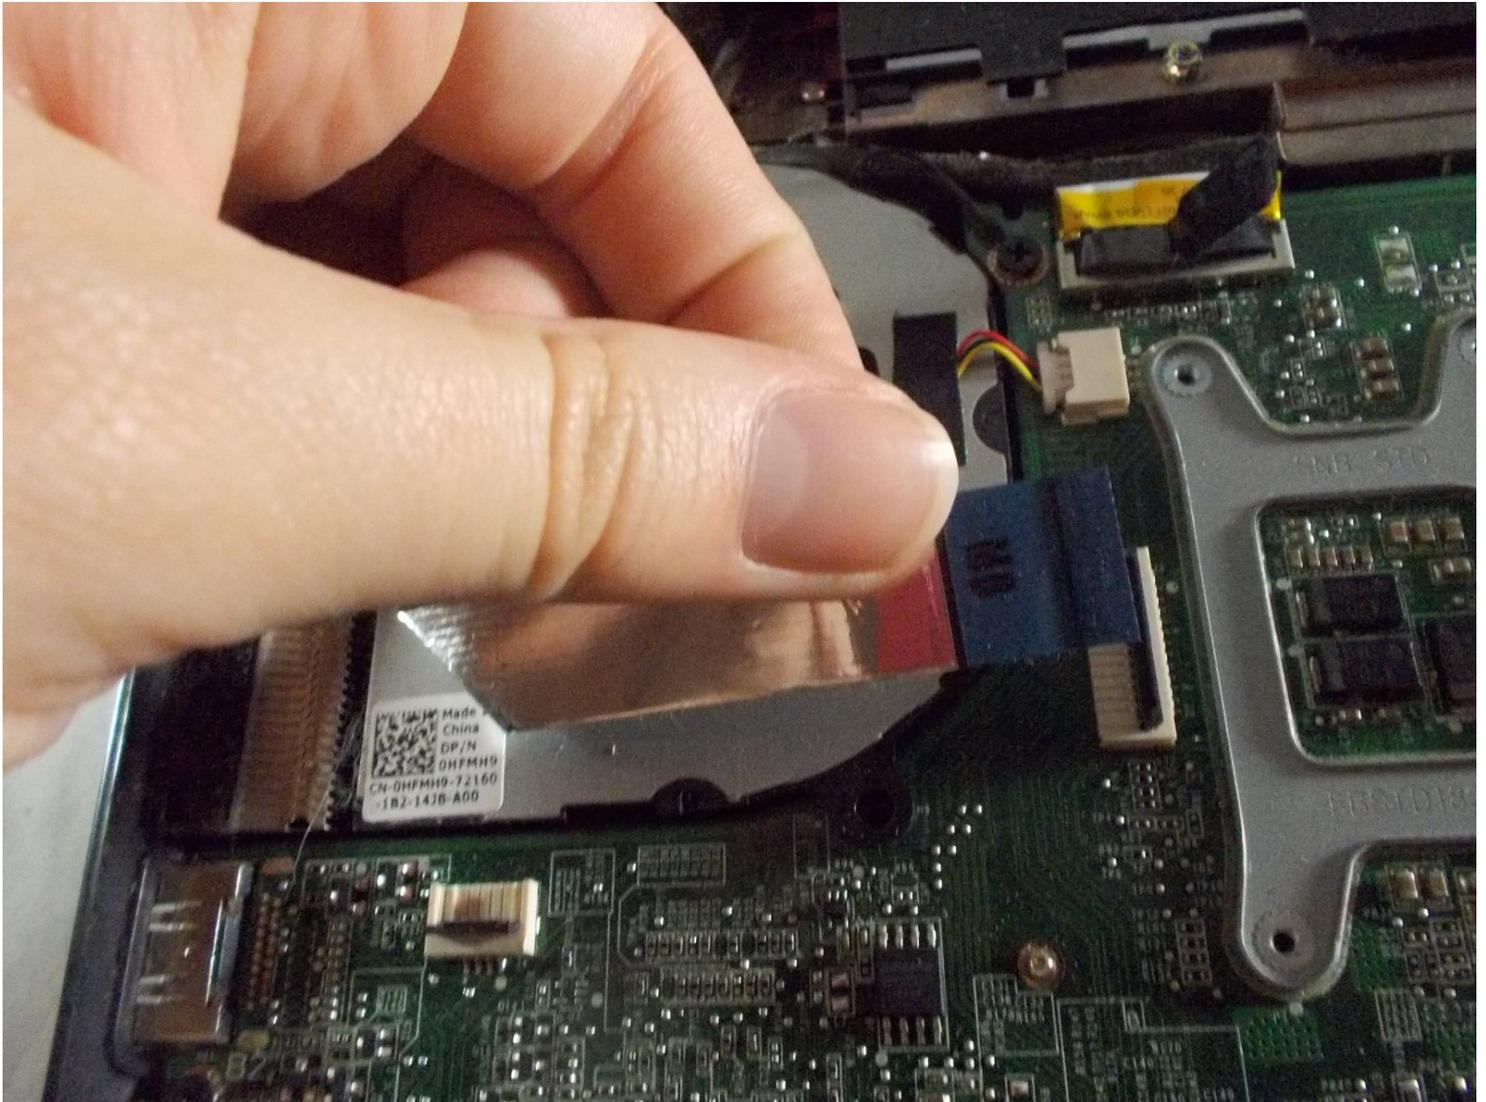

INTRODUCTION

This guide helps replace the fan if the computer is overheating. This will require a fan replacement.

TOOLS:

[iFixit Opening Tool](#) (1)

[Phillips #1 Screwdriver](#) (1)

Step 1 — Battery



 **Make sure the laptop is off and unplugged before starting this step.**

- Locate the battery on the underside of the laptop.
- Push the two battery clips following the direction of the arrows.

Step 2



- Push upward from the base of the battery.

Step 3



- Pull battery away from computer until it is fully removed.

Step 4 — Fan



- Remove the 10 2.5x5 mm screws from the base of the laptop.

Step 5




- Unscrew the final 2.5x5 mm screw attached to the cover.
 - ⓘ This screw is "captive" and does not detach from the cover. Make sure the screw is fully unscrewed before attempting to remove the cover.

Step 6




- Remove the cover from the laptop.

Step 7

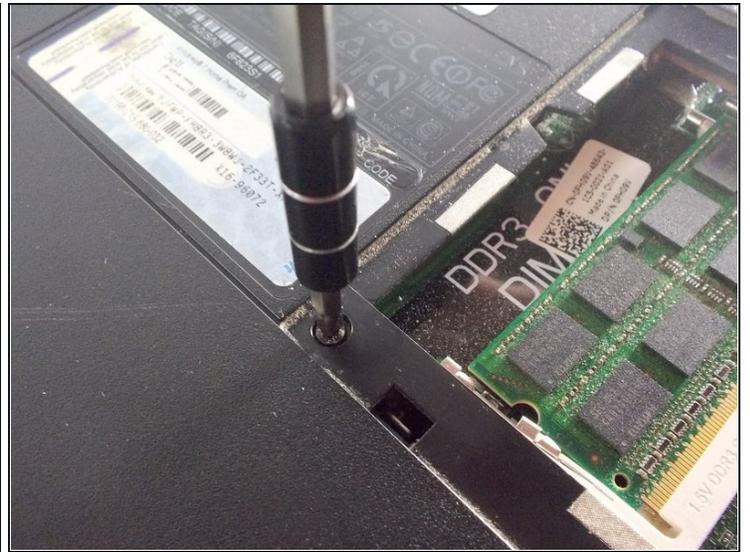

- Unscrew the 2.5x5 mm screw inside the RAM compartment.

Step 8

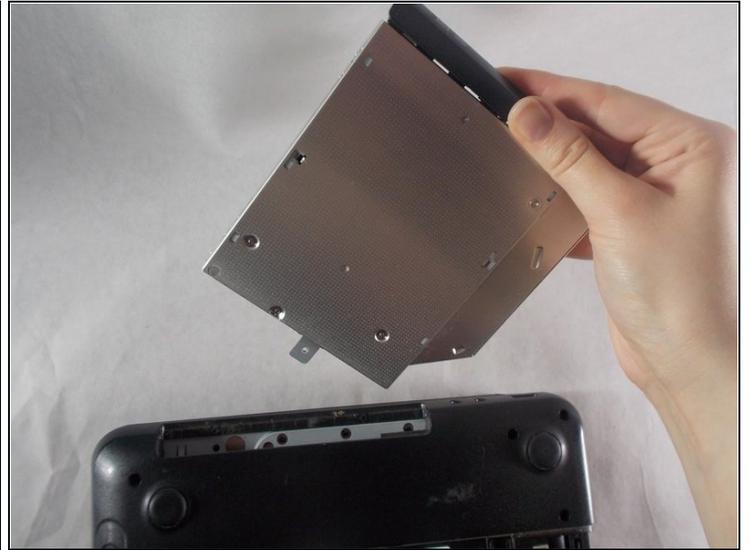

- Remove the disk drive from the side of the computer.
- ⓘ There is no need to press the button, the drive will come out.

Step 9




- Unscrew the two 2x3 mm screws inside the disk drive compartment.

Step 10




- Flip the computer over, and open the laptop.
 - Use a plastic opening tool to begin to remove the keyboard.
 - Use your hands to finish separating the keyboard from the laptop.
- ⓘ This can be a bit challenging, but it will come loose.

Step 11

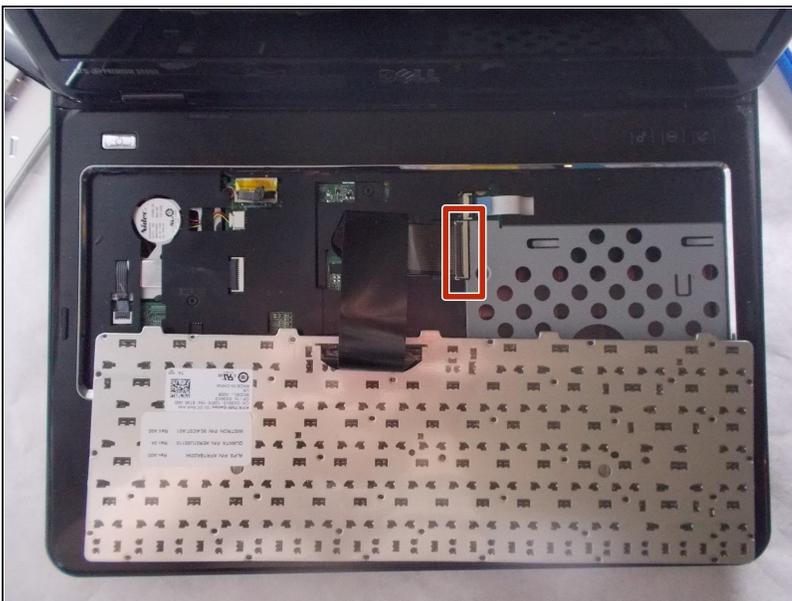


- Lift the black clip from the tan connection for the keyboard.
 - Pull the the connection away from the clip.
 - Move the keyboard away from the laptop.
- ⓘ With the keyboard removed, consider this opportunity to more freely clean it out with some compressed air.

Step 12

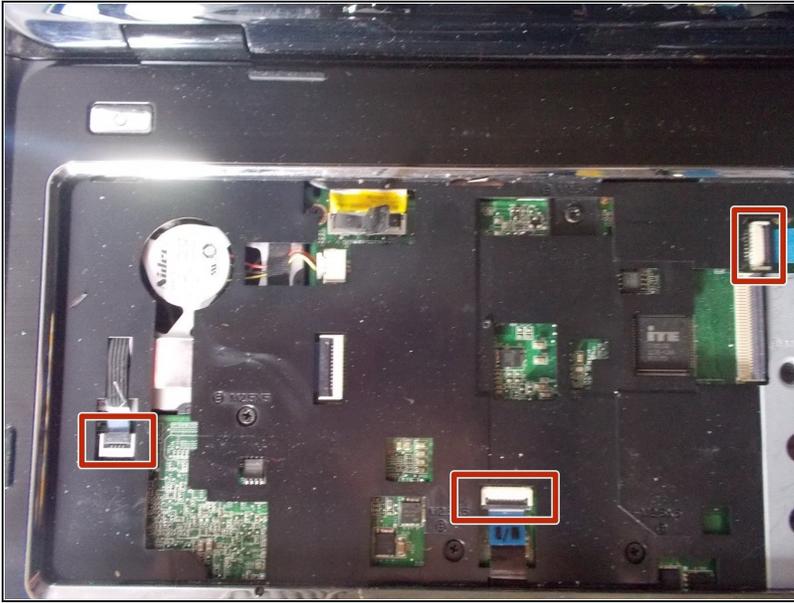


- Lift the black clips from the tan connections for all 3 locations marked.
- Remove the connections from the clips.

Step 13

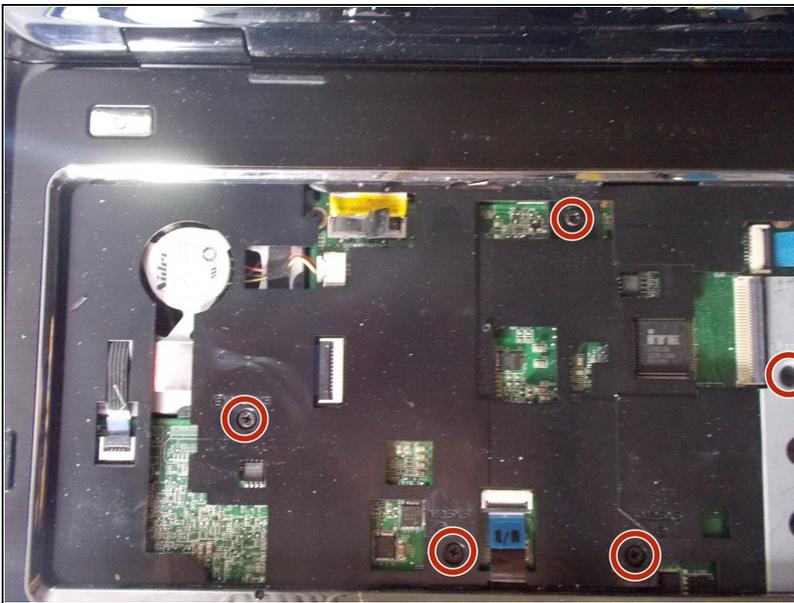


- Unscrew the five 2.5x5 mm screws.

Step 14

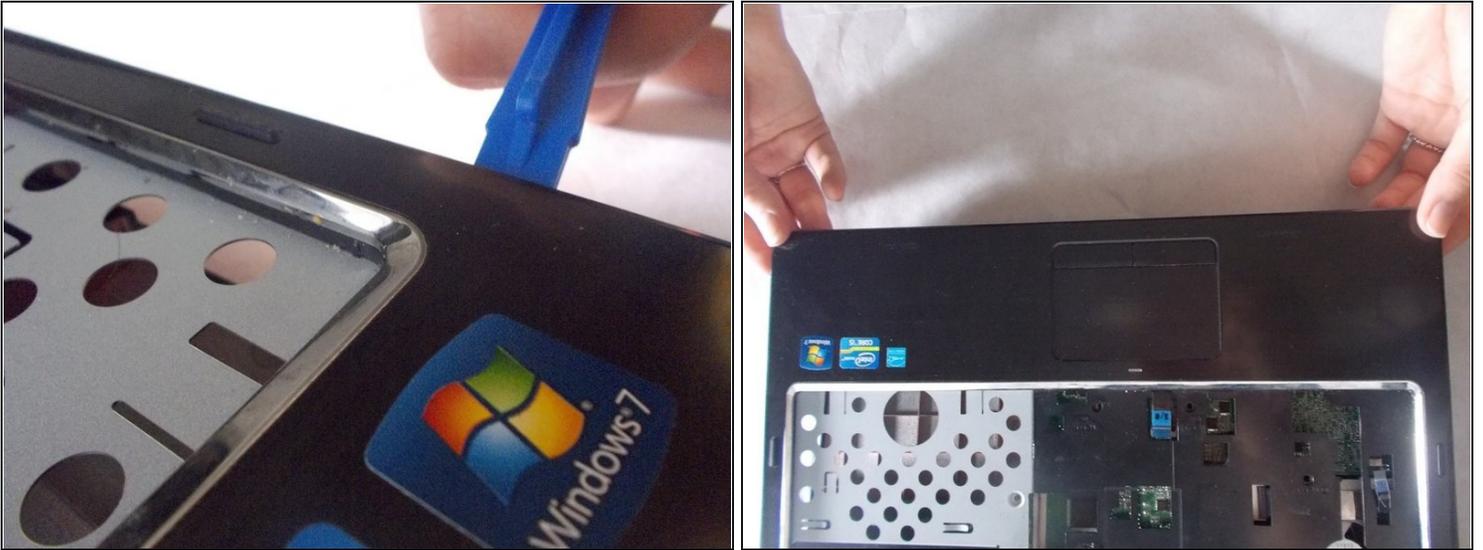

- Use plastic opening tools to remove base cover.
 - Use your hands to fully remove cover from the base.
- ⓘ This may be difficult, but it is possible.

Step 15

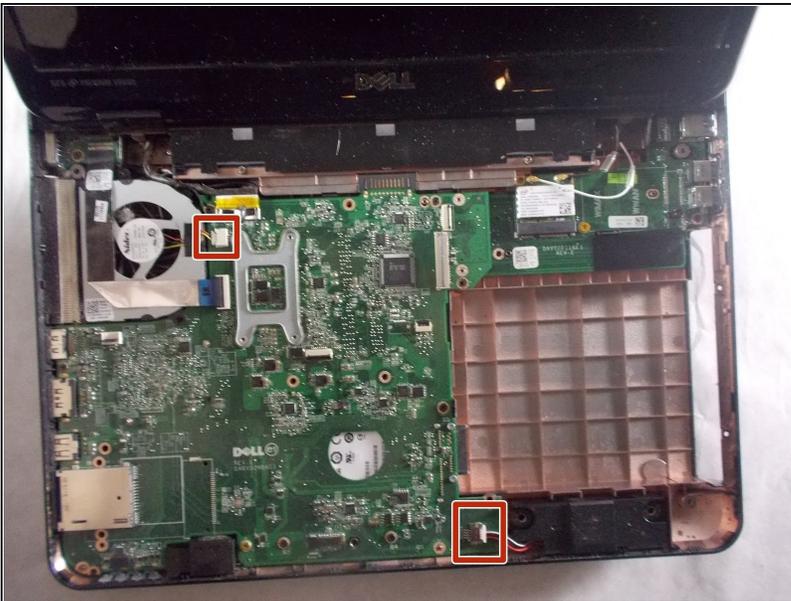

- Disconnect the two cables that connect the speaker and the fan.
- ⓘ These can just be pulled out, they do not have clips.

Step 16



- Disconnect the ribbon cable over the screw to reveal it. Flip up the latch and pull gently on the ribbon to remove it from the connector.
- Unscrew the 2.5x5 mm screw from the fan.

Step 17



- Pull up and remove the fan from the laptop.

To reassemble your device, follow these instructions in reverse order.