



# Kurio Xtreme Battery Replacement

If your Kurio Xtreme is not charging or is not...

Written By: Mallory Myers



## INTRODUCTION

If your Kurio Xtreme is not charging or is not holding a charge, follow these steps to remove the faulty battery. Before proceeding, make sure that you have a soldering iron and know how to use it.

---

### TOOLS:

Phillips #000 Screwdriver (1)

iFixit Opening Tool (1)

Soldering Iron (1)

Plastic Cards (1)

---

### Step 1 — Back Panel



- Remove the rubber case by beginning to peel from one of the top corners and continue peeling until the cover is completely removed.

## Step 2





- Unscrew the four 4 mm black screws using a Phillips #000 screw driver.
  - ⓘ There are two screws on each side of the device (four total).

## Step 3



- Insert the plastic opening tool in between the edges of the blue front casing and black back casing.
- Slide the plastic opening tool around the perimeter of the device. This may require that you repeatedly run the opening tool up and down the edges of the device.
  - ⚠ Be sure not to break any of the plastic clamps along the edges of the device when removing the back cover.
- Carefully lift the back panel off of the rest of the device.


## Step 4 — Battery

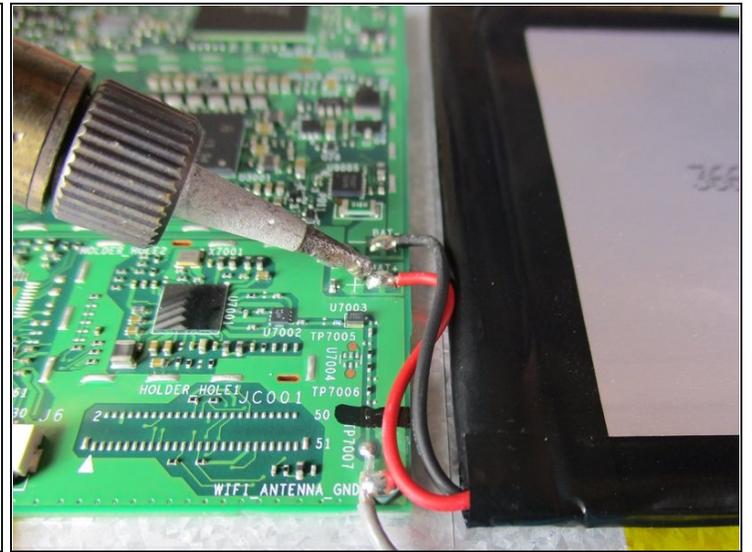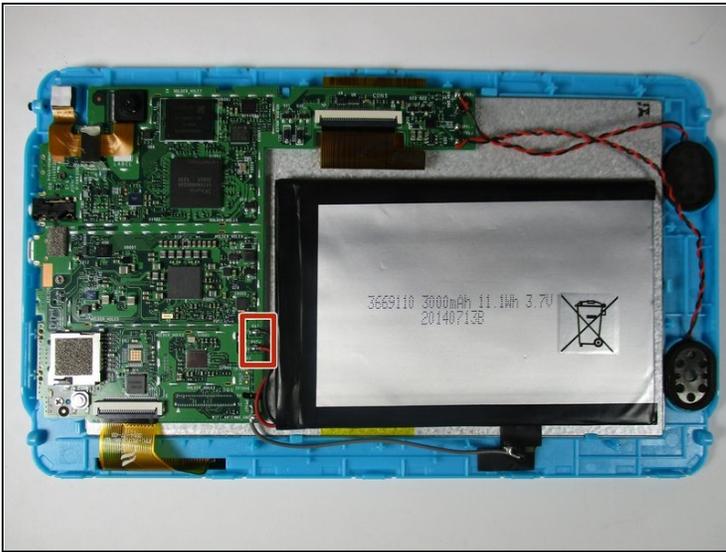

- Disconnect the black and red wires from the motherboard by [soldering](#) the ends that are connected to the motherboard.

⚠ The soldering iron gets very hot and may injure you if exposed to your skin.

## Step 5

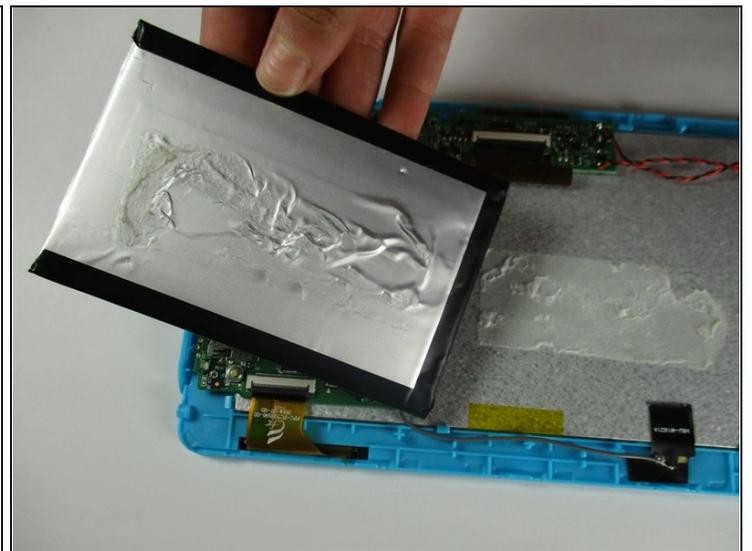

- Slide iFixit's [Plastic Card](#) tool or a credit card under the battery to remove the glue that is holding it in place.
  - ⓘ Be patient and gentle. The glue is strong and may take up to 30 seconds to remove.
- Carefully lift the battery out of the device.

---

To reassemble your device, follow these instructions in reverse order.