



LG X Power Disassembly

You will be accessing the inside components...

Written By: Chad Sears



INTRODUCTION

You will be accessing the inside components through this guide but not replacing anything. You will need to complete this before replacing anything on the phone.



TOOLS:

- [iFixit Opening Tool](#) (1)
 - [Spudger](#) (1)
 - [Phillips #0 Screwdriver](#) (1)
-

Step 1 — LG X Power Disassembly




- Insert a plastic opening tool above the AUX jack and slide it around the perimeter to pop the back cover off.

Step 2



- Remove the twelve 2.5mm Phillips #0 screws from the back of the phone.

Step 3

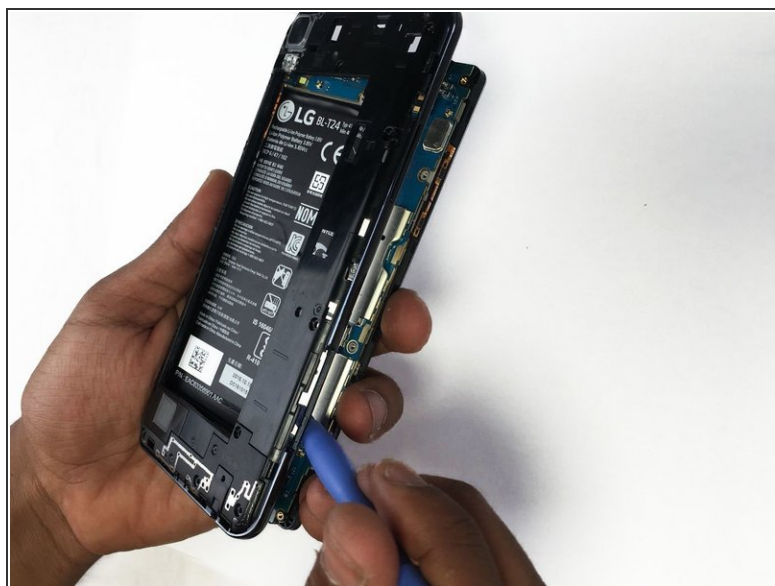

- Insert a plastic opening tool underneath the mid-frame and pry upwards until you hear a click.
- With the plastic opening tool still underneath the mid-frame, work your way around the perimeter until it's free from the smartphone.

To reassemble your device, follow these instructions in reverse order.