



Asus Q551L Screen Replacement

This guide will show how to remove the screen from the Asus Q551L laptop.

Written By: Colleen Ford



INTRODUCTION

This guide is intended to show how to remove a damaged screen from the laptop. Reversing the steps will describe the steps needed to replace the laptop with a new screen.



TOOLS:


- [T5 Torx Screwdriver](#) (1)
 - [JIS #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Metal Spudger](#) (1)
-

Step 1 — Back Panel




- Unscrew the 10 screws around the edge of the back panel. Eight of the screws are 0.0793mm T5 , two of them are 0.0793 JIS #0.

Step 2

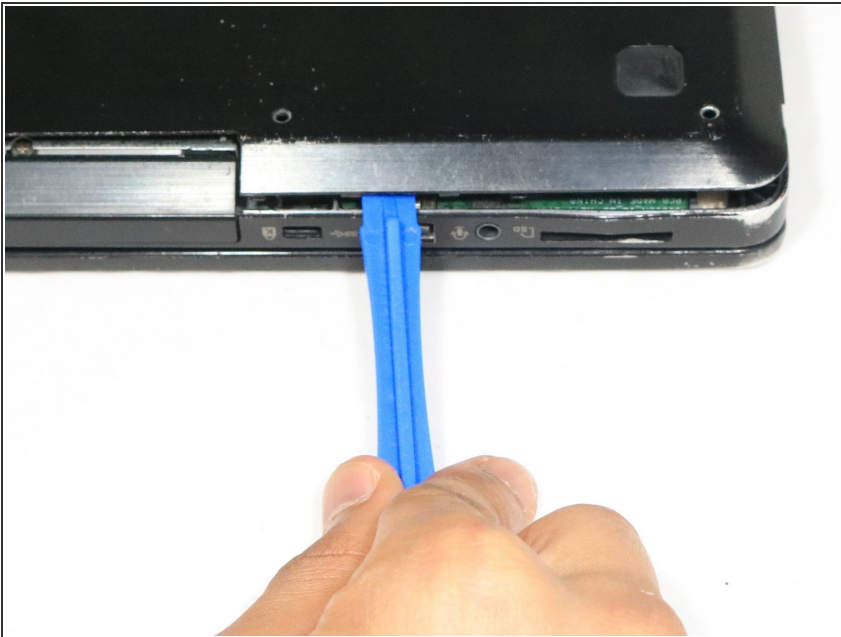


- Use the plastic opening tool to pry the back panel off the base of the laptop.

Step 3 — Battery

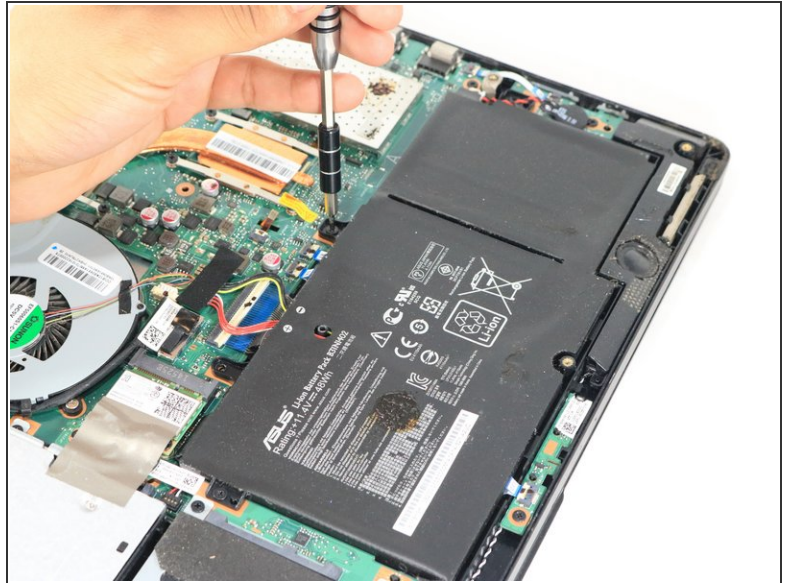


- Unscrew the four screws to remove the battery.

Step 4

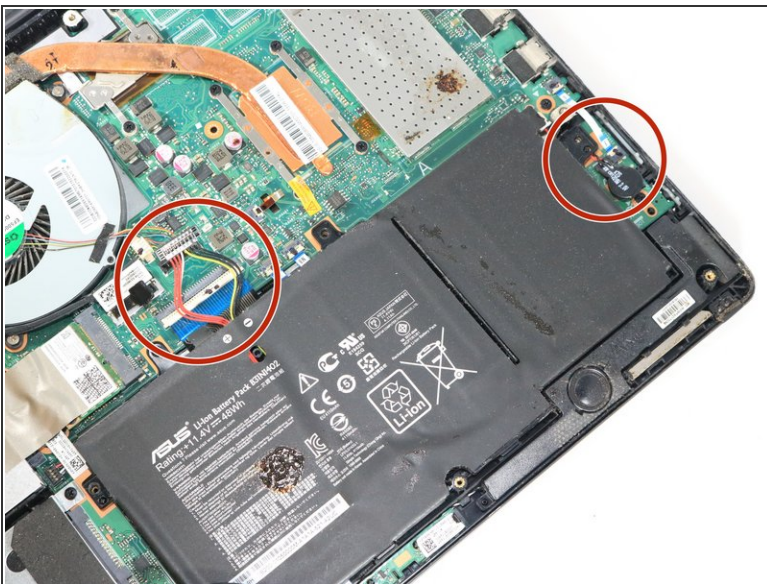

- Un-clip both wire clips on the upper and right side of the battery.
- Lift the battery out of the device.

Step 5 — Screen

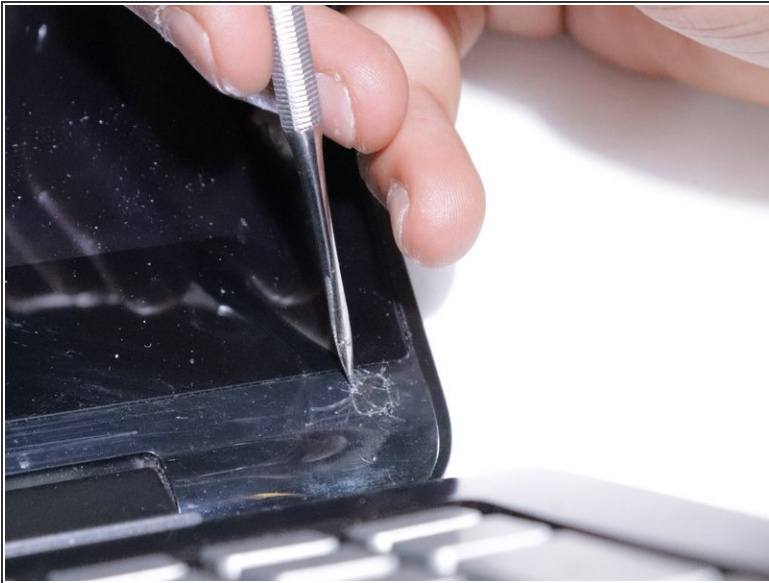

- Use the metal spudger to gently lift the two plastic squares off the screen.

Step 6



- Unscrew the two PH0 screws and set them aside.

Step 7



- Use the plastic opening tool to pry the front edges of the screen off of the back.

Step 8



- Take off the tapes.
- Gently pry the LCD from the front frame.

To reassemble your device, follow these instructions in reverse order.