




JBL Charge 2 Plus Battery Replacement

How to replace the battery from the JBL Charge 2+.

Written By: John Reynolds

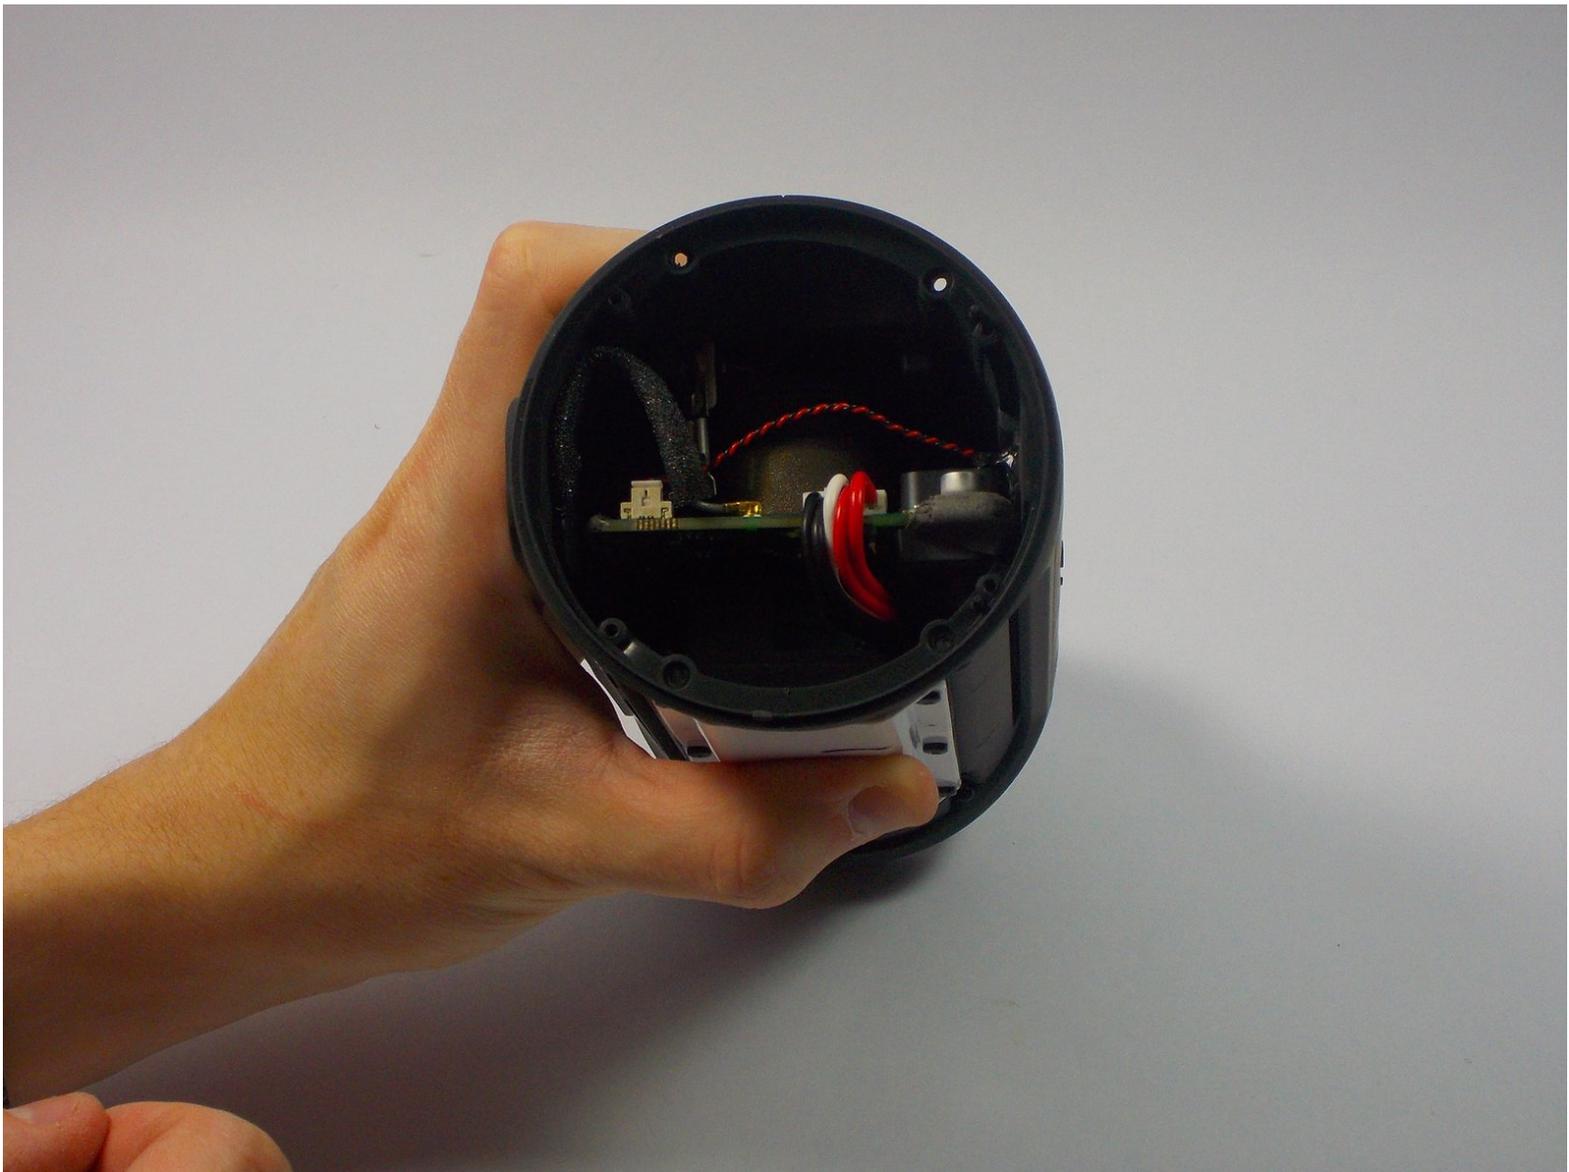

INTRODUCTION

This guide goes over how to remove the battery from the JBL Charge 2+.



TOOLS:

- [Metal Spudger](#) (1)
- [Phillips #00 Screwdriver](#) (1)



PARTS:

- [JBL Charge 2 Plus Replacement Battery](#) (1)

Step 1 — Passive Radiators




- Starting from the front side bottom left corner, use the nylon or metal spudger to lift the grille up from each of the four corners.
- Follow the previous instruction to remove the back grille.

Step 2



- Unscrew the two .5 mm screws that hold the sub woofer in place.
- Repeat the last step for the two screws on the back side.

Step 3

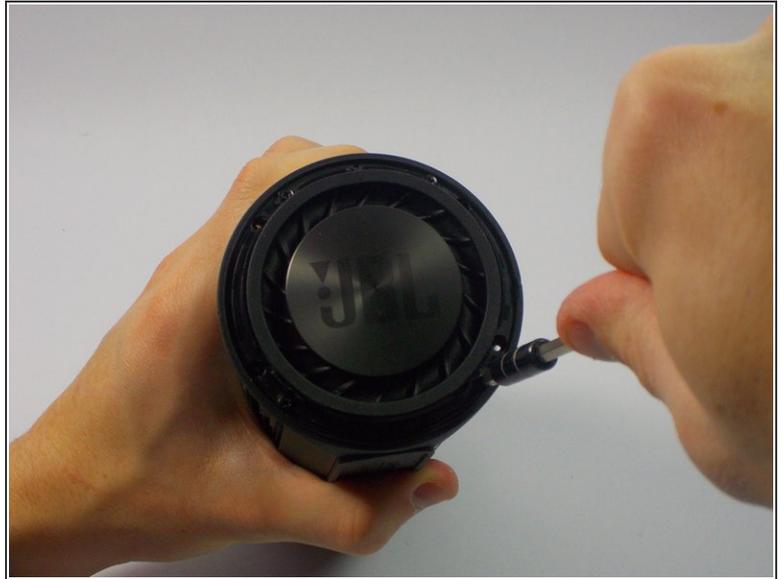

- Remove the four screws that hold the passive radiator in place

Step 4



- Pop the Passive Radiator off.

Step 5




- Repeat Step 2, 3 and 4 for the other passive radiator.

Step 6 — Battery




- Remove the battery wire from the circuit board by pulling it out gently on the side closest to the LCD light.

Step 7

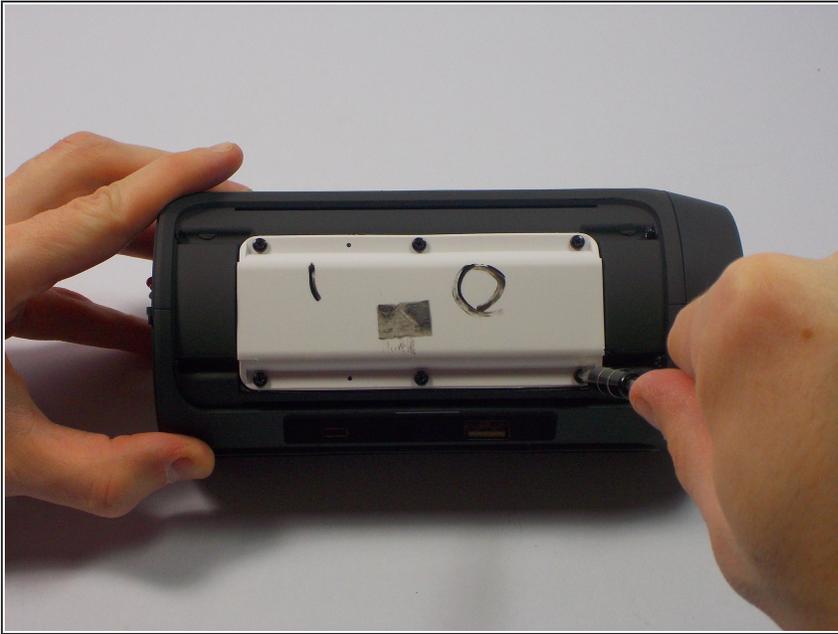

- Remove the 6 screws that hold the white cover in place.

Step 8

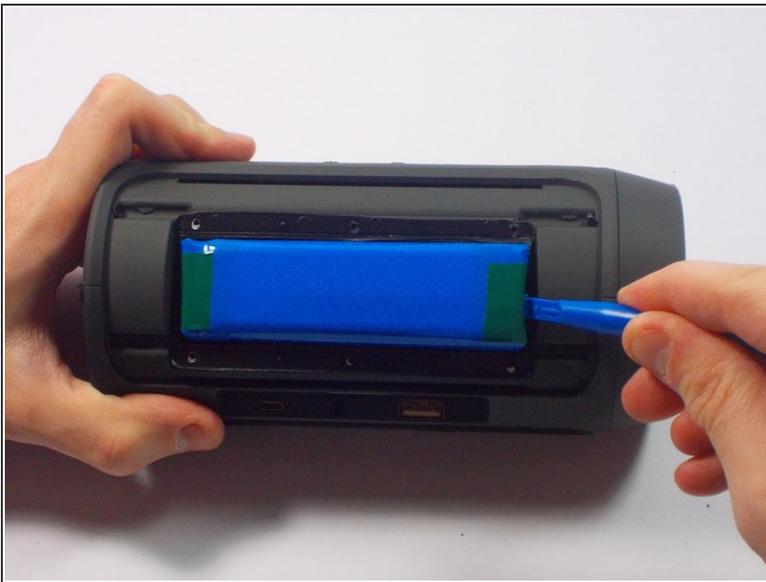

- Use the plastic opening tool to remove the battery.

To reassemble your device, follow these instructions in reverse order.