



Asus Eee PC T101MT Battery Replacement

Follow these steps to replace your Asus Eee PC T101MT's Battery.

Written By: Jarnell Miranda



INTRODUCTION

If your tablet doesn't power on after charging, connect the power adapter. If it powers on after connecting the adapter, follow these steps to replace your battery.

TOOLS:


- [iFixit Opening Tools](#) (1)
-

Step 1 — Battery



- ⚠ Before you begin, make sure your device is powered off and not connected to the power supply.
- Turn the tablet over and position it so it matches the picture.

Step 2

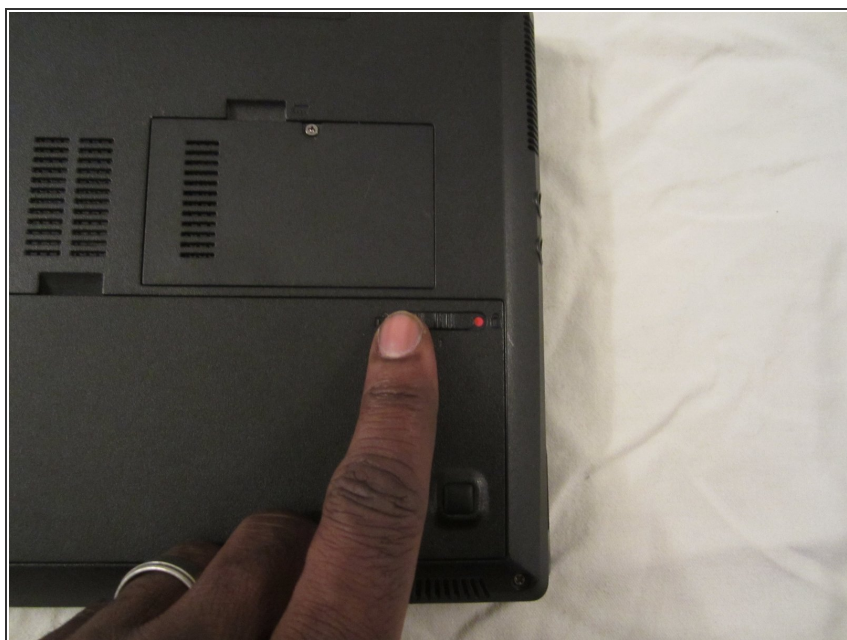

- Locate the sliding tab on the right and slide it to the left in order to unlock the battery.

Step 3



- Use a plastic opening tool to lift the battery up as you slide the tab on the left to the right.

Step 4



- Lift the battery out of the device.

To reassemble your device, follow these instructions in reverse order.