



# Lenovo ThinkPad S431 Screen Assembly Replacement

How to remove the damaged screen from the Lenovo ThinkPad S431.

Written By: Mohammed AlManai



## INTRODUCTION

This guide will show you the steps to safely remove the damaged screen from your laptop. Once the screen is broken, you cannot receive accurate information from your laptop.



### TOOLS:

- [Flathead 3 mm Screwdriver](#) (1)
- [Phillips #1 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)



### PARTS:


- [14" PC Laptop LCD N140BGE-E43](#) (1)

## Step 1 — Screen Assembly



- Place an opening tool under the screen cover, and pop it off.
- ⚠ Using a metal object to open fragile parts of your laptop could cause damage! Instead use the opening tool listed in the tools section above.

## Step 2

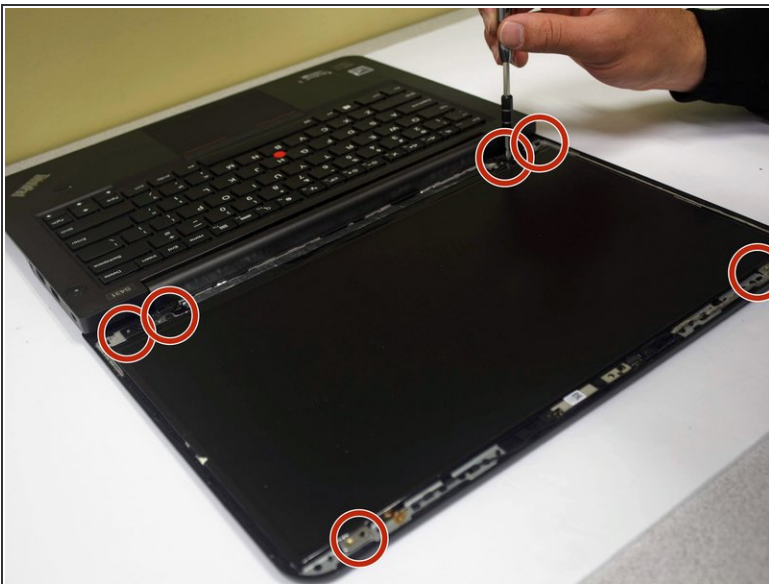

- Take off the 6 screws using the Philips head #1.

## Step 3



- Lift the screen out from the top.

## Step 4



- Remove the connector located at the bottom of the back of the screen.

To reassemble your device, follow these instructions in reverse order.