




First Act MA2039 Speaker Replacement

Replacing a blown First Act MA2039 guitar amp speaker.

Written By: Landon Connolly

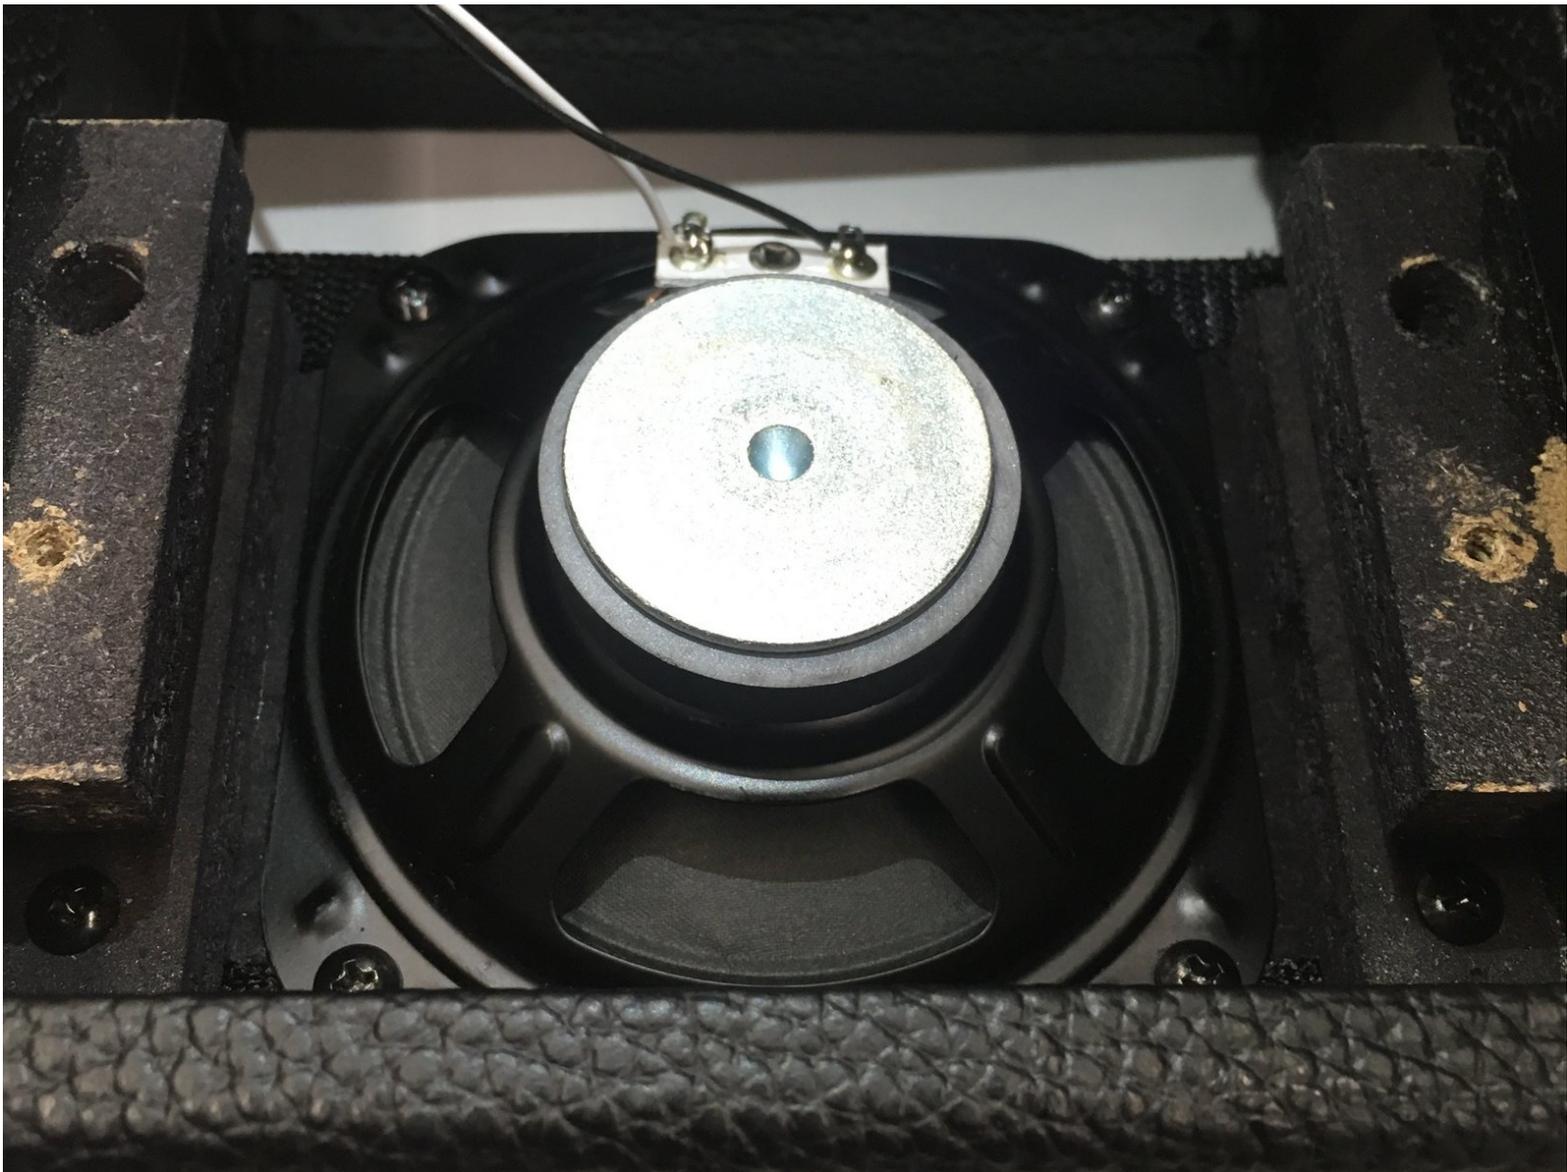

INTRODUCTION

This guide will show you how to remove and replace a blown speaker. Doing this will require a phillips head screwdriver and wire cutters. A soldering tool will also be needed to reattach wires to the new speaker.

TOOLS:


- [Phillips #00 Screwdriver](#) (1)
 - [Flush Wire Cutters](#) (1)
 - [Soldering Iron](#) (1)
-

Step 1 — Speaker



- Use a Phillips #0 screwdriver to remove the two 25mm screws that secure back panel to amplifier.

Step 2

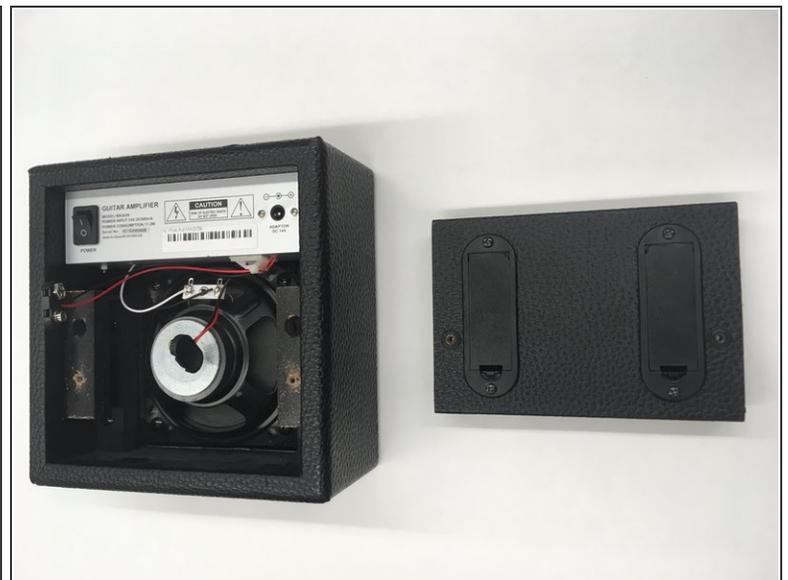

- Once screws are removed, lift the panel from the amplifier and feed the battery terminals through holes in battery cartridges.
- Take the panel off and set it to the side.

Step 3



- Use a Phillips #0 screwdriver to remove the four 25mm screws that fasten the speaker to the inside of the amplifier.

Step 4



- [Desolder](#) the black and white speaker wires from the contact board.
- The speaker can now be completely removed from the amplifier.

To reassemble your device, use soldering link provided to solder existing wires onto new speaker, then follow these instructions in reverse order.

