



Handheld Toilet Bidet Sprayer Replacement

This guide will offer step by step instructions with visuals to help you replace your handheld toilet bidet sprayer and stop any water leak.

Written By: Almuhammad Althurwi



INTRODUCTION

The handheld toilet bidet sprayer is a simple but effective cleaning product. It is most common in the Middle East. It is important to know how to replace or fix one of them. People can replace or fix the handheld toilet bidet Sprayer when there is water leaking from the pipes. This is the most common reason to fix the handheld toilet bidet sprayer. If you need to replace a damaged or nonworking handheld toilet bidet sprayer, this guide will offer step by step instructions with visuals to help you.



PARTS:

- [toilet water supply hose rubber](#) (1)
-

Step 1 — Handheld Toilet Bidet Sprayer



- Turn off the toilet water valve by turning the knob clockwise.

Step 2



- Flush the toilet until no water is left in the tank.

Step 3



- Place a towel under the tank incase of any water drops.

Step 4



- Unscrew the water supply line from the T-connector by turning the knob counterclockwise.

Step 5




- Unscrew the hose from the T-connector by turning the knob counterclockwise.

Step 6



- Unscrew the T-connector from the toilet by turning the knob counterclockwise.

Step 7

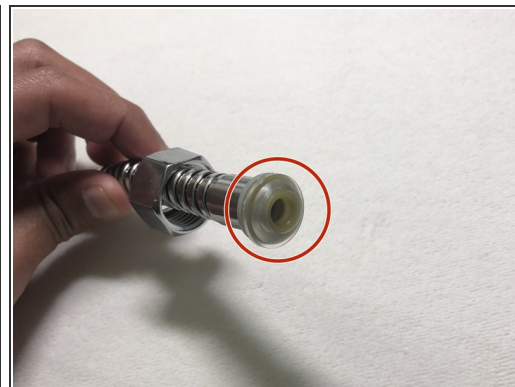


- Install the toilet sprayer's rubber on the water supply hose from the side that is causing a water leak. This will stop water leaking from the hose.

Step 8



- Screw the T-connector back on the toilet by turning the knob clockwise.

 Be careful not to cross the threads.

Step 9



- Screw the water supply nut onto the bottom of the T-connector by turning the knob clockwise. Make sure it is firmly hand tight.

Step 10



- Screw the water supply hose back on the T-connector by turning the knob clockwise. Be sure not to over tighten the nut.

Step 11



- Turn on the toilet water valve by turning the knob counterclockwise. now, you can test your water and spray it through the hose. Make sure there is no water leaking.