



Samsung Galaxy J7 Screen Assembly Replacement

This guide will help you replace a cracked or...

Written By: Gabriel Arellano



INTRODUCTION

This guide will help you replace a cracked or broken screen on your Samsung Galaxy J7.

TOOLS:

[Phillips #000 Screwdriver](#) (1)
[iFixit Opening Tool](#) (1)

PARTS:

[Galaxy J7 \(2015\) Screen](#) (1)

Step 1 — Back Cover



- Remove the back of the device by pulling on the tab in the top left.

Step 2 — Battery




- Pull out the battery by pulling on the bottom left slit under the battery.

Step 3 — Midframe




- Using the Phillips #000 screwdriver, remove ten 4.2 mm screws.

Step 4

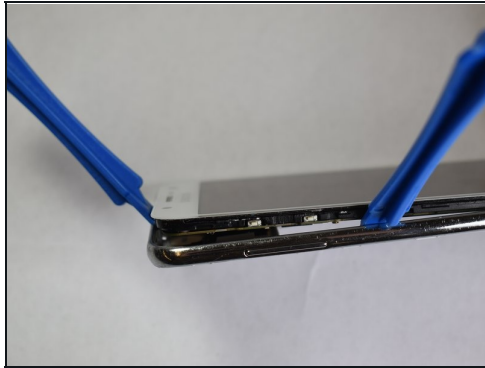


- Lift up the back of the device with the iFixit opening tool and disconnect it from the front.

Step 5 — Screen Assembly

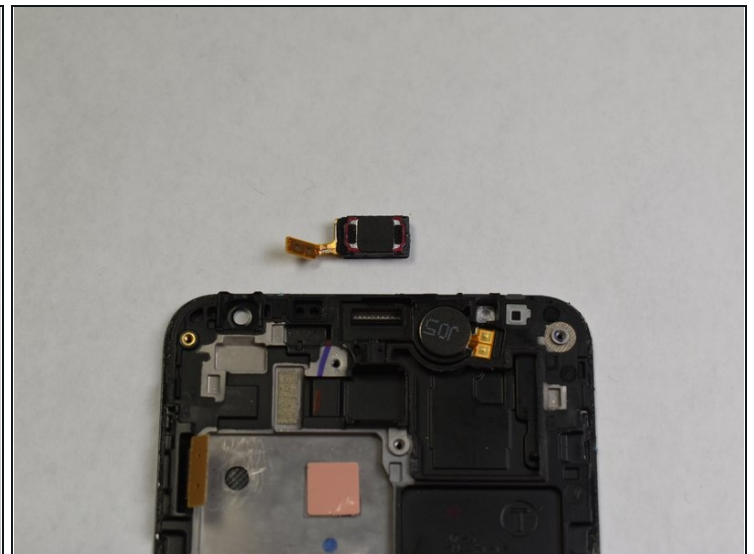

- Gently lift up the speaker piece and disconnect it from the panel.

Step 6

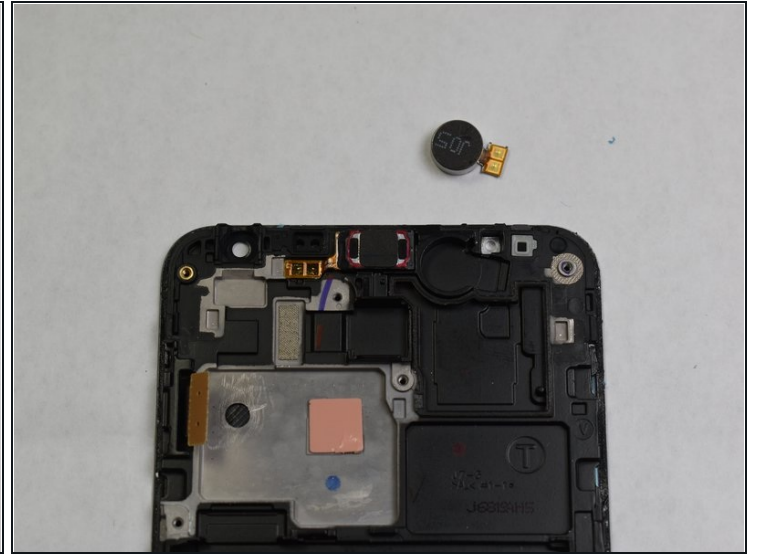

- Gently lift up the tab of the motor.
- Remove the motor from the panel completely to disconnect it.

Step 7



- Reverse these steps with your new phone screen to replace it.

To reassemble your device, follow these instructions in reverse order.