



Disassembling Midland X-tra Talk Radio LXT118 Batteries

The simplest way to try and solve any...

Written By: Logan




INTRODUCTION

The simplest way to try and solve any malfunctions of the radio is to first replace the batteries.

TOOLS:

[Spudger](#) (1)

Step 1 — Batteries

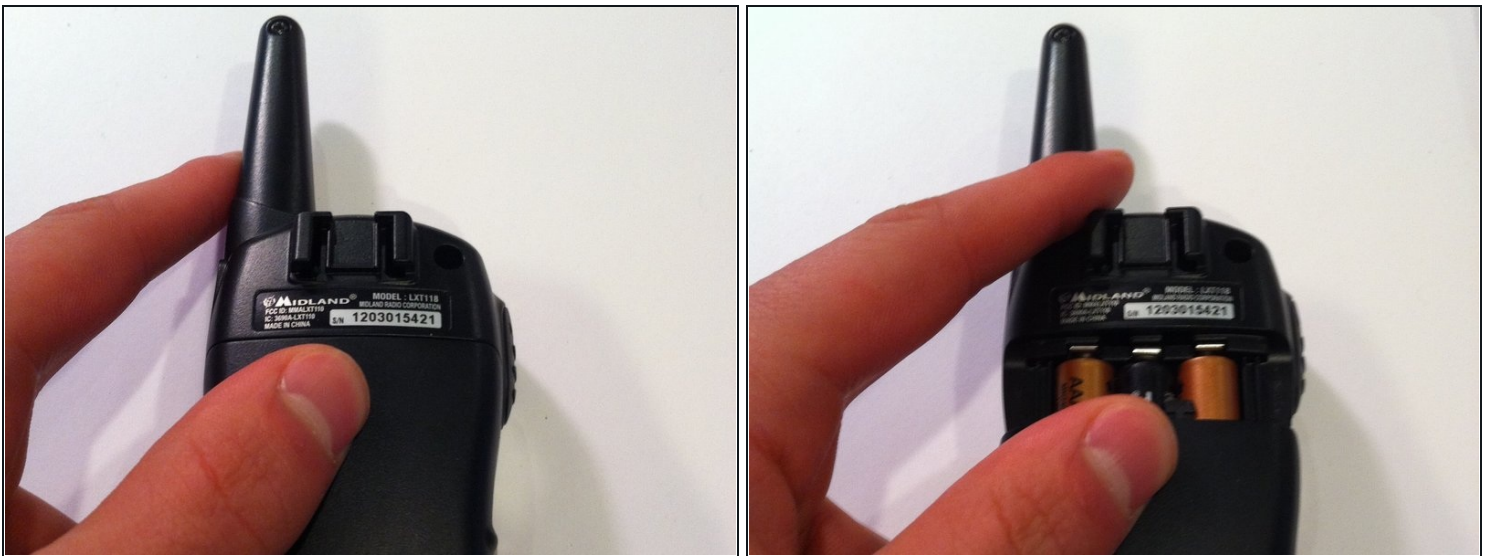

- First, apply pressure with your thumb on the top of the battery cover.
- Next, pull down on the cover until it begins to slide.

Step 2



- Finally, once the cover is completely off, pry up the old batteries with your finger or a strong, skinny tool (i.e. spudger).

To reassemble your device, follow these instructions in reverse order.