



American Sanders EZSand Orbital Sander 07163A 2012 Driver Pad Replacement

Remove or replace a driver pad on a Clarke Floor Sander 07163A 2012.

Written By: Miles Robinson



INTRODUCTION

Use this guide to remove or replace a driver pad on a Clarke Floor Sander 07163A 2012.

This guide shows the removal of just one pad, but the procedure for the other two pads is identical.



TOOLS:

- [3mm Hex Key](#) (1)



PARTS:

- [Clarke Pad Foam Driver 11139A](#) (1)

Step 1 — Remove the sandpaper disc




- ⚠ Before you begin, be sure that the sander is unplugged and powered off.
- Carefully tilt the sander back and lay it down on its side, exposing the three sanding pads on the bottom.

Step 2



- Peel the hook-and-loop sandpaper disc off of the driver assembly.

Step 3 — Remove the driver pad

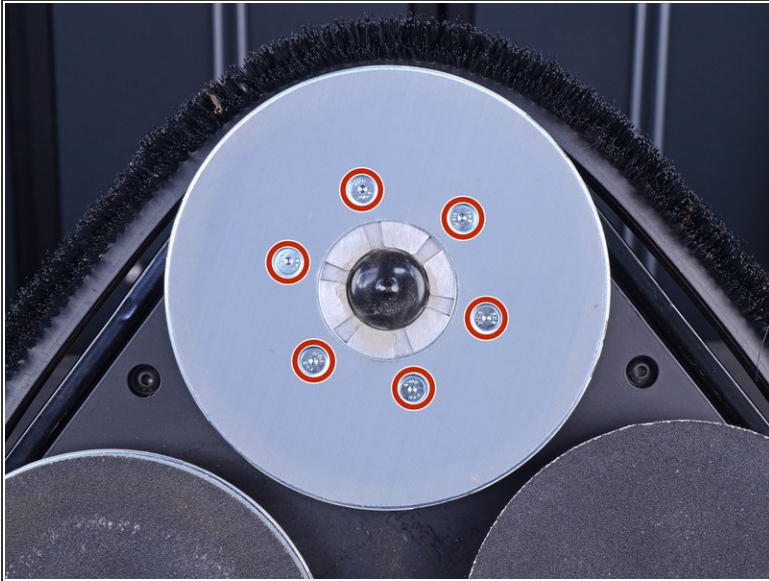

- Use a 3 mm hex key or driver bit to remove the six 11.9 mm-long screws securing the driver pad.
- Remove the driver pad from the sanding disc.

To reassemble your device, follow these instructions in reverse order.