



# Samsung Galaxy A10 Back Cover Replacement

How to remove or replace a damaged back cover on your Galaxy A10.

Written By: Adriana Zwink



---

## INTRODUCTION


Use this guide to remove or replace a damaged back cover on your Galaxy A10.

---

### TOOLS:


- [SIM Card Eject Tool](#) (1)
  - [iFixit Opening Picks set of 6](#) (1)
-

## Step 1 — Samsung Galaxy A10 SIM Tray Replacement

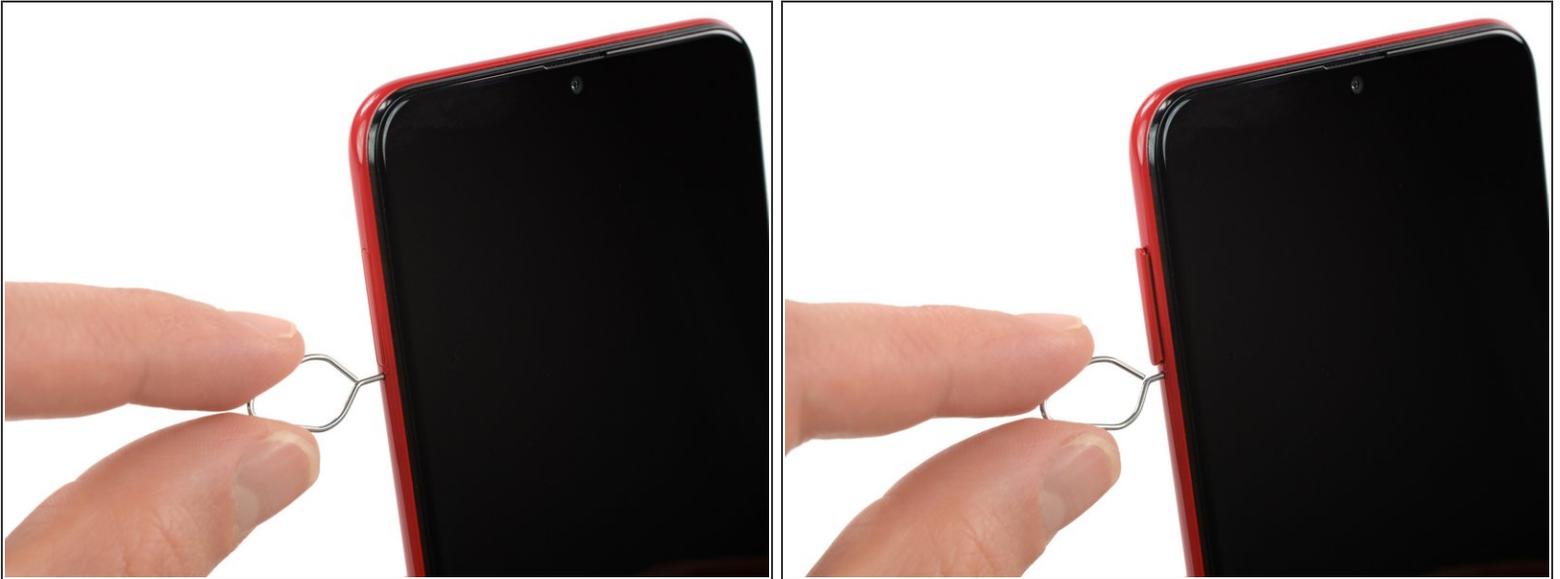

- Insert a SIM card eject tool, a SIM eject bit or a straightened paper clip into the hole on the SIM tray located at the left side of the phone.
- Press firmly to eject the tray.

## Step 2

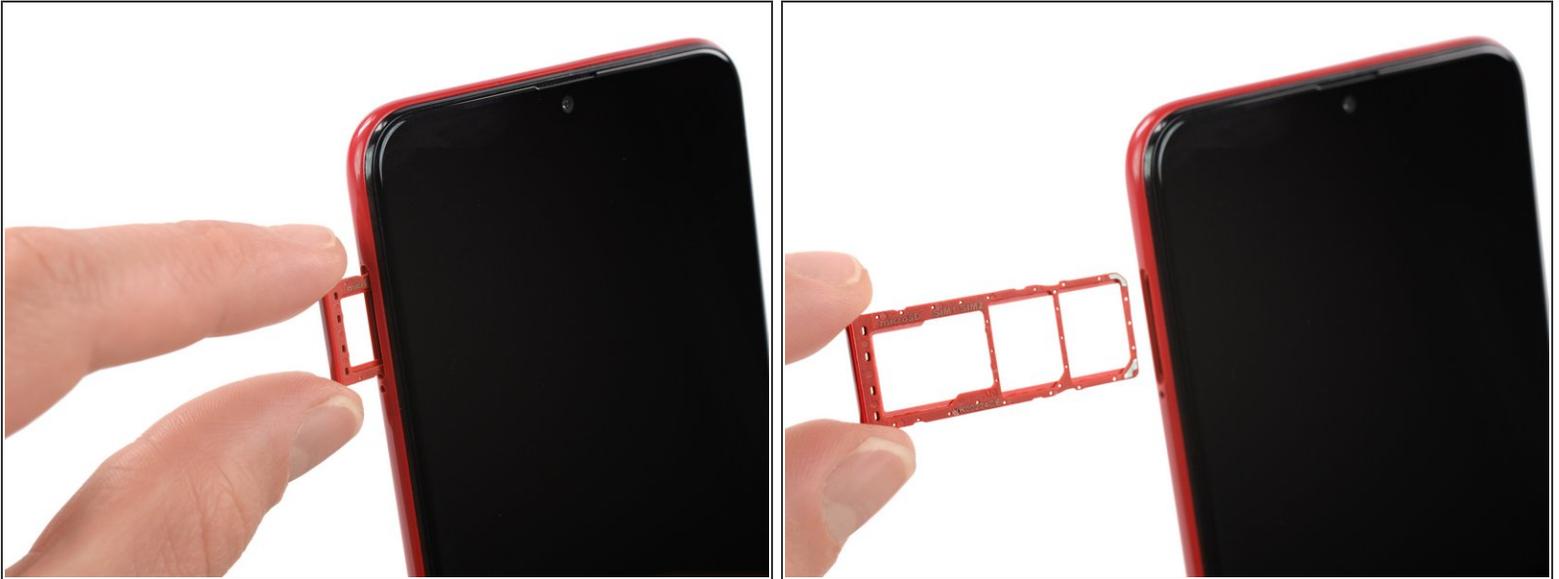

- Remove the SIM card tray.
- ⓘ When reinserting the cards, make sure to properly orient them in the tray.

### Step 3 — Back Cover



**i** The back cover is held in place by plastic clips.

- Insert an opening pick between the screen and the back cover on the bottom of the phone where the charging port is located.

### Step 4



- Slide the opening pick to the bottom left corner to release the clips.

## Step 5



- Slide the opening pick along the left edge to the top left corner of the phone, to release the clips.

## Step 6



- Slide the opening pick from the top left corner to the top right corner to release the plastic clips.

## Step 7



- Slide the opening pick from the top left corner to the bottom right corner to release the remaining clips.

## Step 8



- Remove the back cover.

To reassemble your device, follow these instructions in reverse order.

Repair didn't go as planned? Try some [basic troubleshooting](#), or ask our [Answers community](#) for help.