




# Motorola Q700 Sidekick Motherboard Replacement

enable user to remove and replace motherboard

Written By: Rich

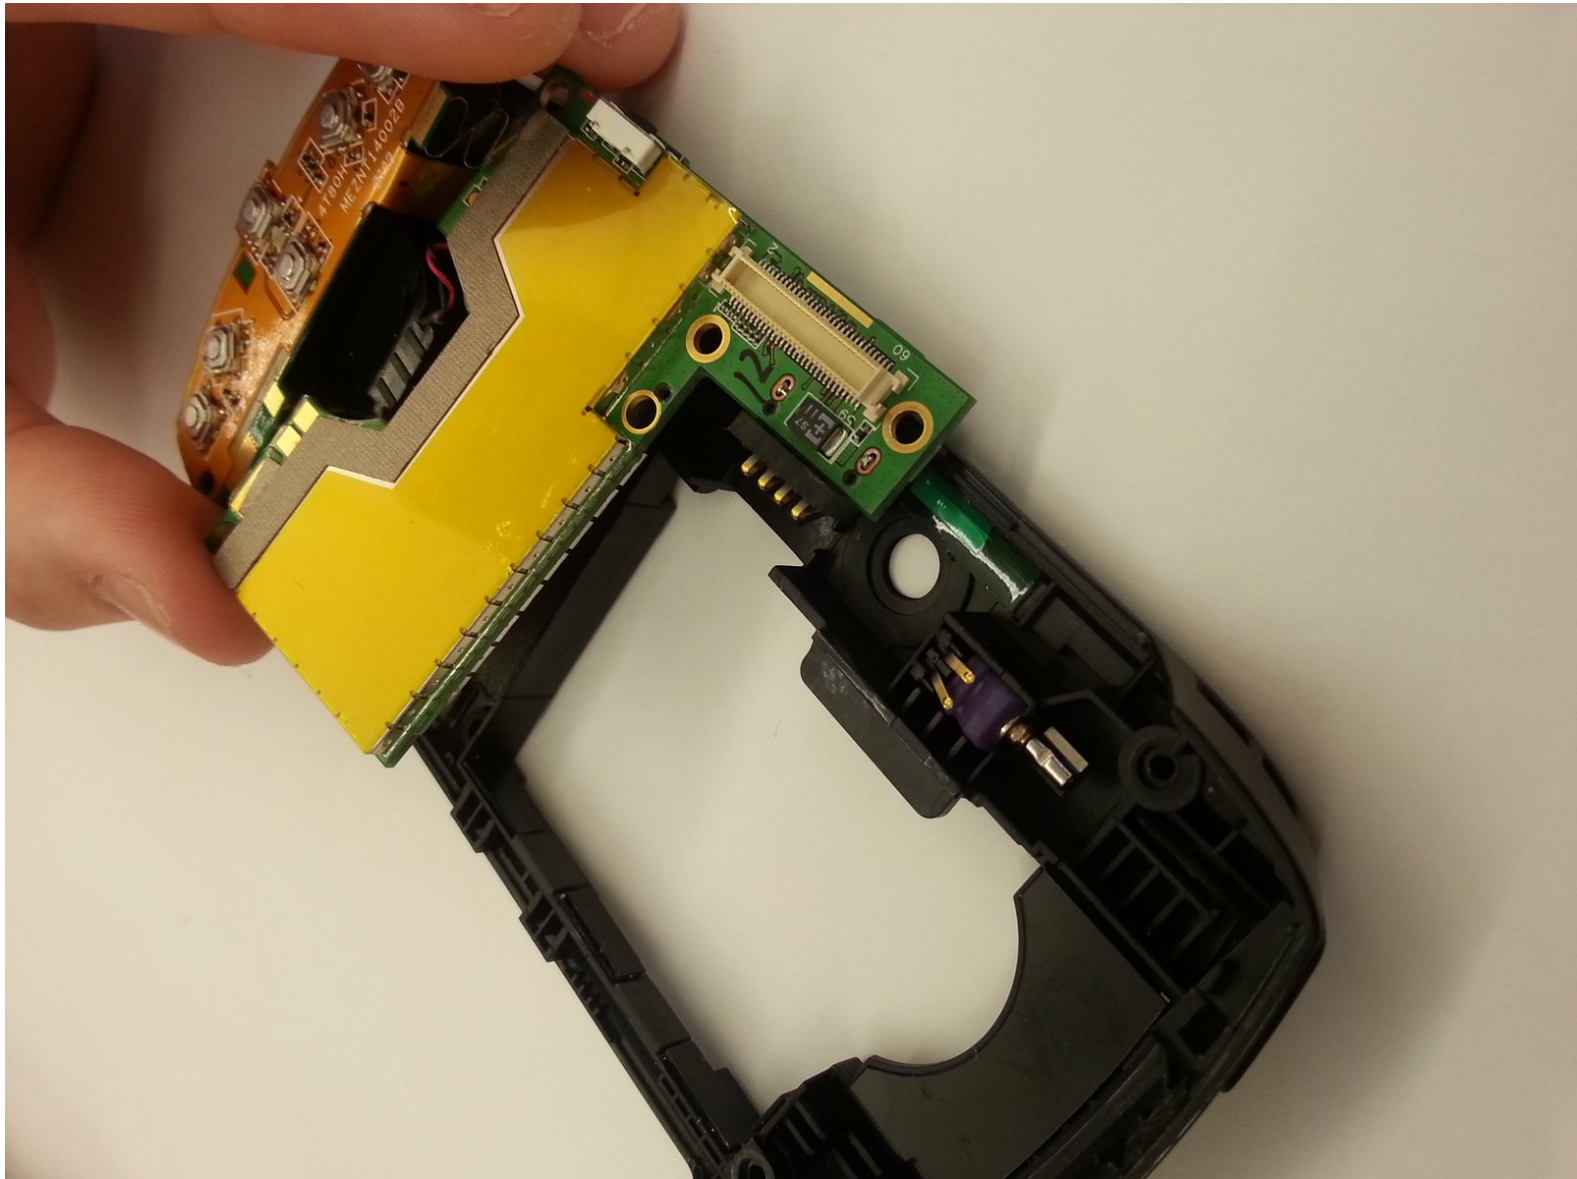



## TOOLS:


- [Phillips #1 Screwdriver](#) (1)
- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)

## Step 1 — Phone



- When looking at the front of the phone, use the Plastic Opening Tool to pry off the four buttons located in each of the corners on the front.

## Step 2

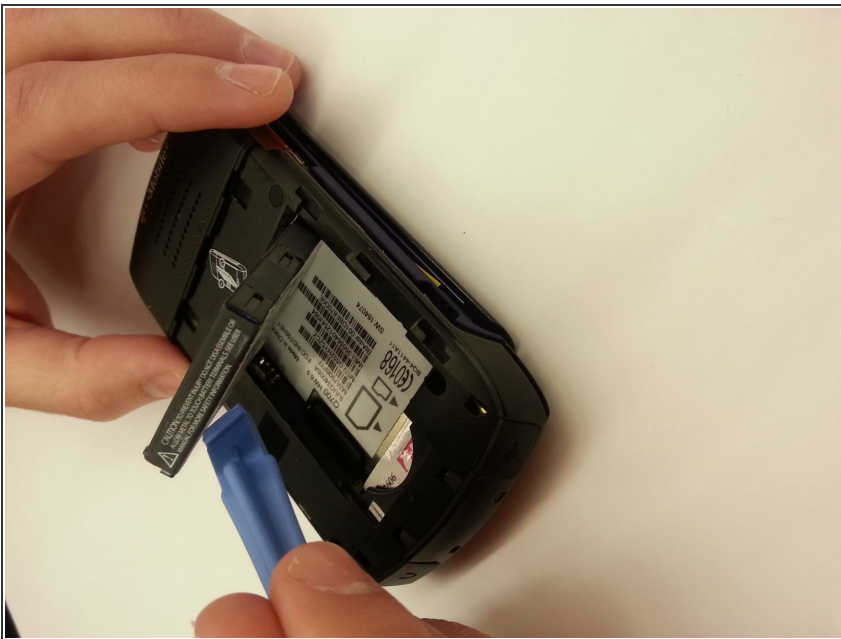


- Turn the phone face-down. Remove the back cover, exposing the battery.
- Use the Plastic Opening Tool to pry the battery out of the phone.

### Step 3



- Using the appropriate size Phillips screwdriver, unscrew the four screws located in each of the corners on the back of the device.
- Although the battery is shown in this picture, please remember to make sure that it is removed in order to proceed with disassembly.


### Step 4

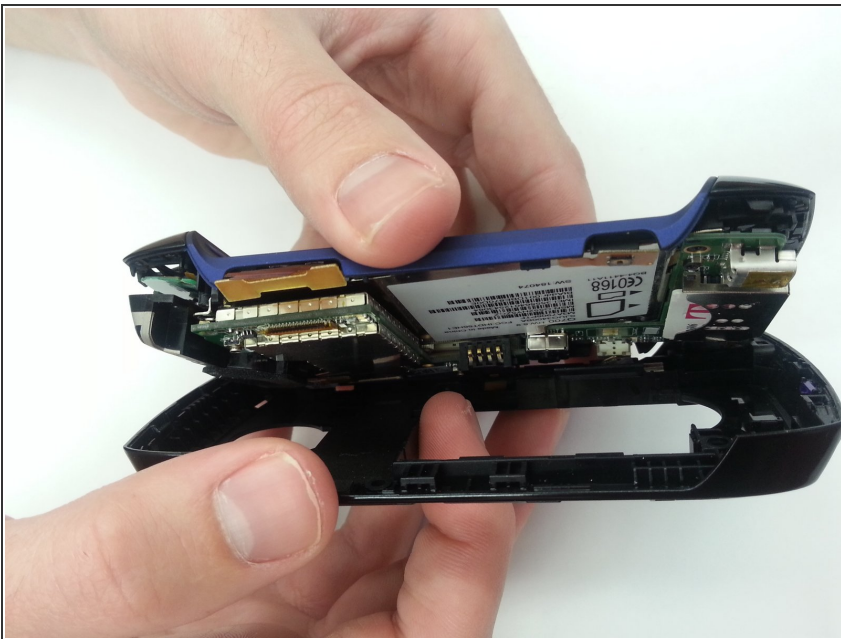

- After removal of the back screws, use the Plastic Opening Tool to carefully separate the top and bottom halves of the device.




## Step 5

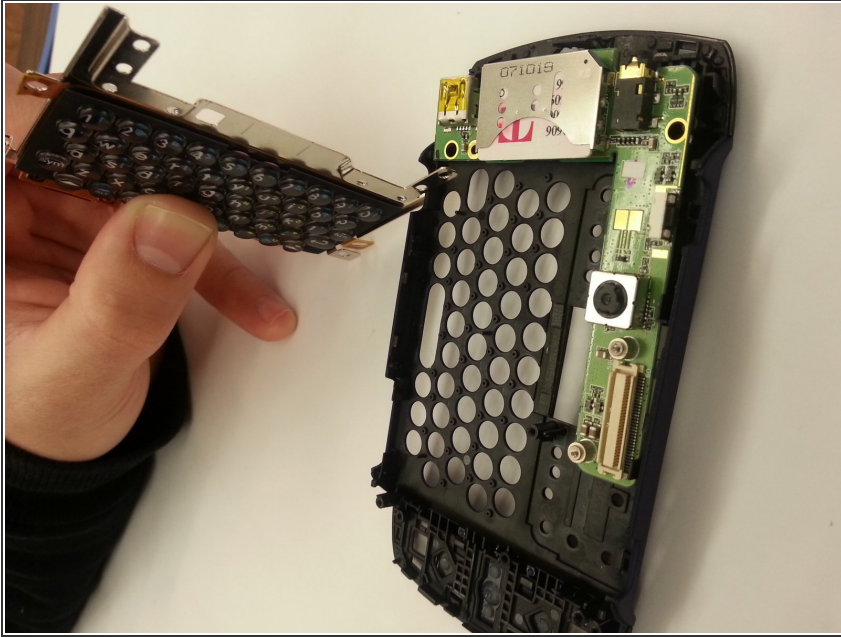

- Using the appropriate size Phillips screwdriver, remove any screws that are attached or associated with the keypad and carefully remove keypad from the device.

## Step 6

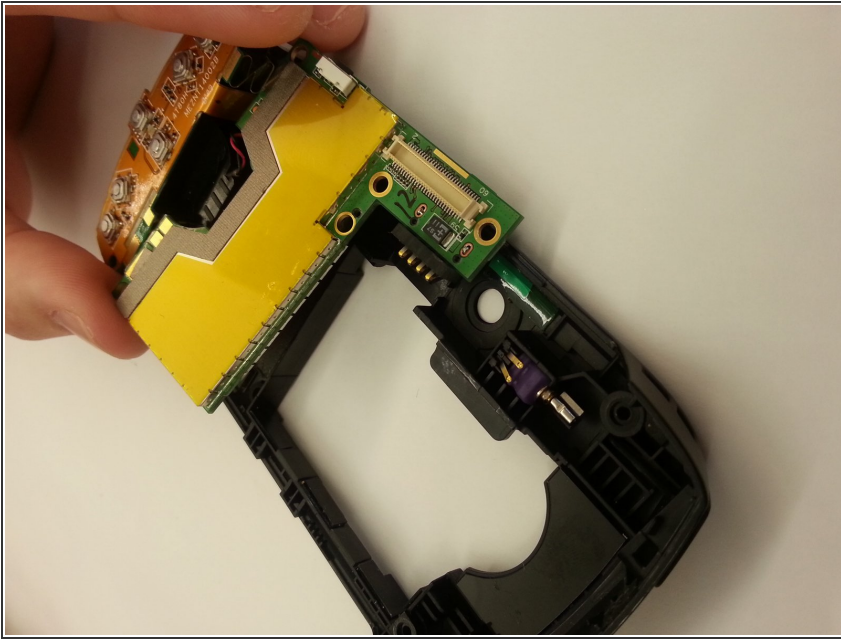


- On the back of the device, you will see individual green and yellow technical pieces. Remove those two pieces from the phone with your fingers and set aside.

## Step 7



- You should now have all of the pieces separated and disassembled for your device.

## Step 8 — Motherboard

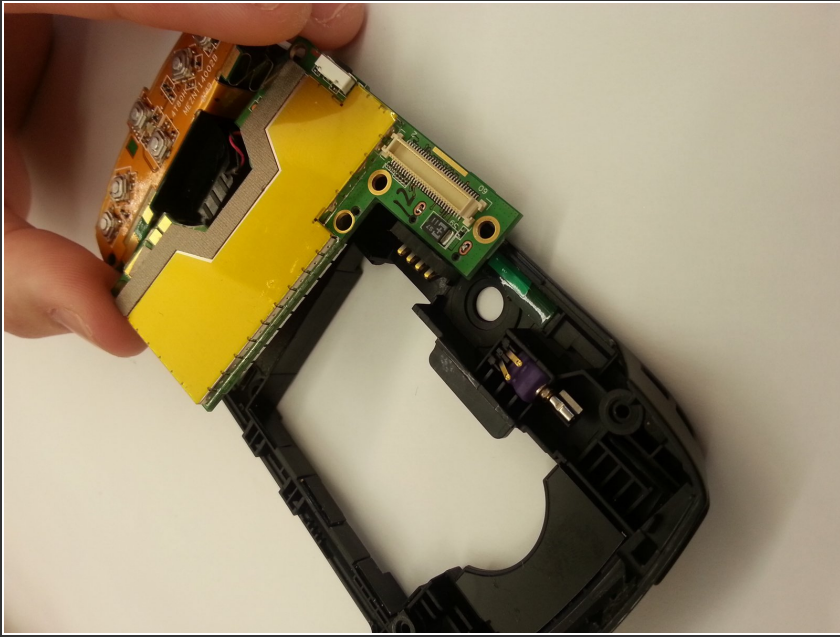

- Complete steps for removing battery and front cover in order before continuing on to motherboard

## Step 9



- Remove all technical componets

To reassemble your device, follow these instructions in reverse order.