




Motorola V60s Speakers Replacement

This is a guide showing how to replace the...

Written By: Eric Freeman

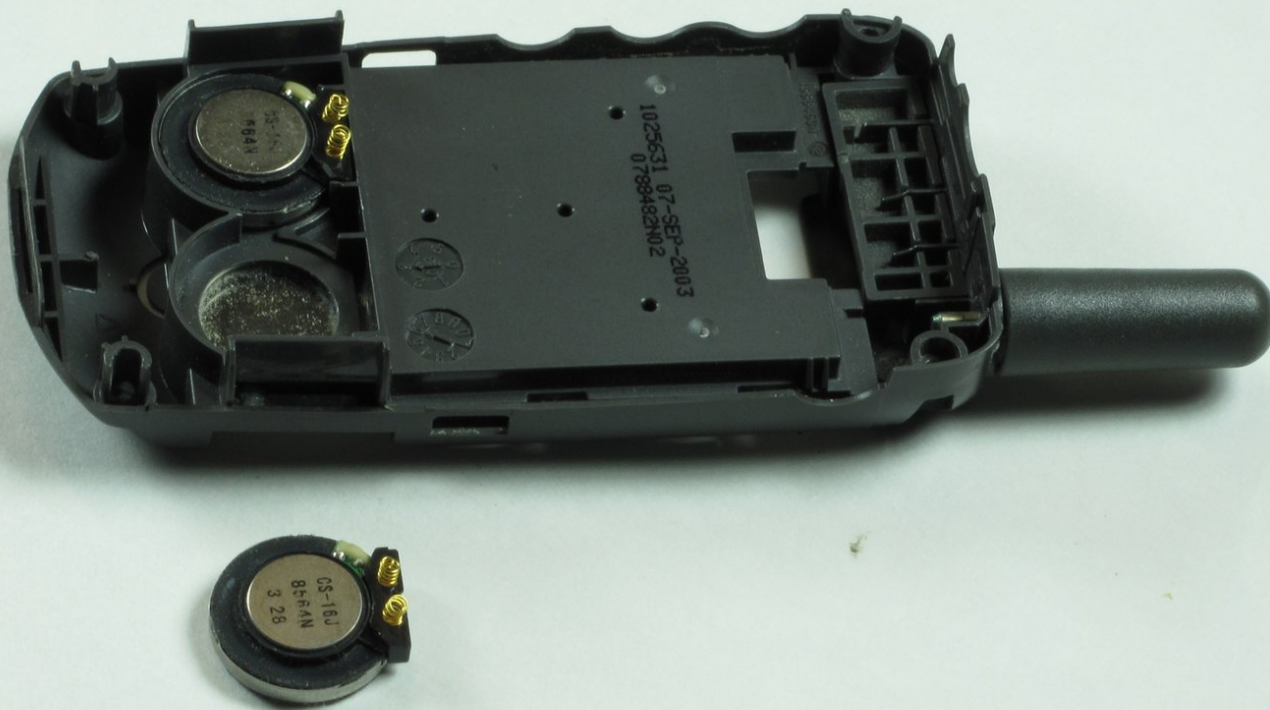

INTRODUCTION

This is a guide showing how to replace the Motorola V60 speakers.



TOOLS:

- [iFixit Opening Tool](#) (1)
 - [Spudger](#) (1)
 - [T6 Torx Screwdriver](#) (1)
-

Step 1 — Battery



- Push in release lever towards top of phone, then use blue spudger to pry case off.
- After case is removed from the back of the phone, you can simply use your hands to take it the rest of the way off.
- Set cover aside in a safe location.

Step 2




- Carefully grab battery towards bottom of phone.
- Lift from bottom and take out of phone, set aside in a safe location.

Step 3 — Speakers




- Remove the four screws using a T6 Torx screwdriver.
- ⓘ Top screws are silver and short while bottom screws are black and longer.

Step 4

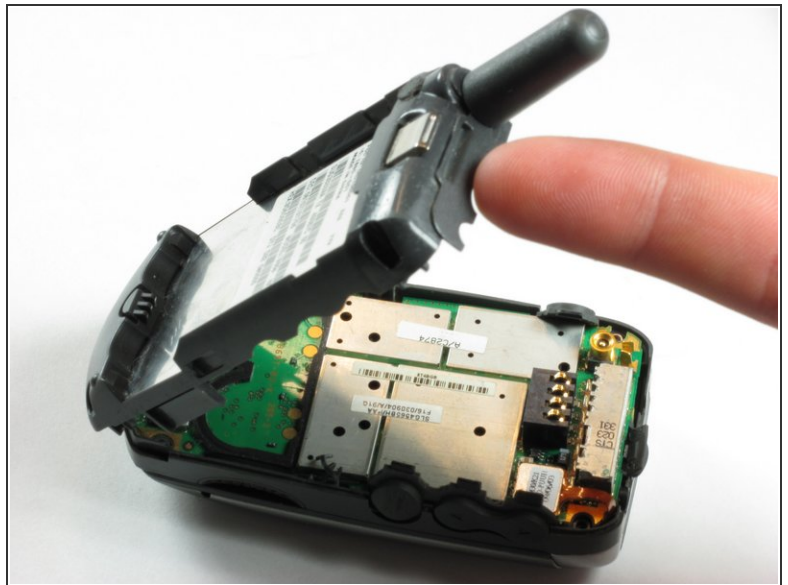

- Insert an iFixit opening tool into phone in between back panel and body of phone.
- Carefully pry up until back panel comes off, then remove with hands and set aside.

Step 5

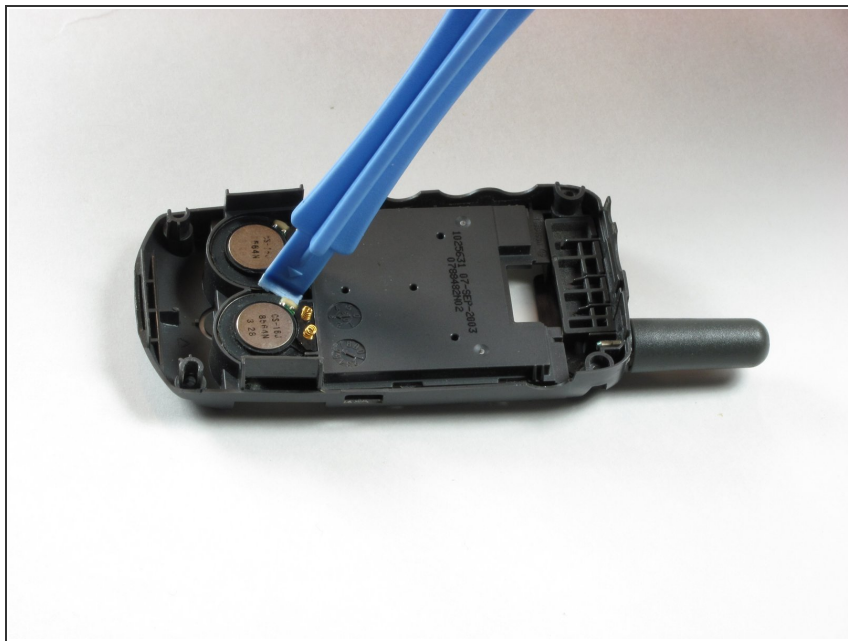

- Carefully insert an iFixit opening tool between the speaker and phone chassis. Slowly pry until speakers come out.
- ⓘ Be careful on this step; it may take some time.

To reassemble your device, follow these instructions in reverse order.