



LG Rumor Touch Motherboard Replacement

This guide explains how to replace the...

Written By: Jose Rivas



INTRODUCTION

This guide explains how to replace the motherboard of an LG Rumor Touch, a touch screen phone.

TOOLS:

Spudger (spatule antistatique) (1)

Tournevis cruciforme #1 (1)

Tournevis cruciforme #00 (1)

Step 1 — Battery




- Remove the phone's back cover by placing your thumb the above charging port, located at the bottom of the phone, and sliding the back cover upward.

Step 2



- Gently pry the battery out of the phone with the spudger.

Step 3 — Inner Shell

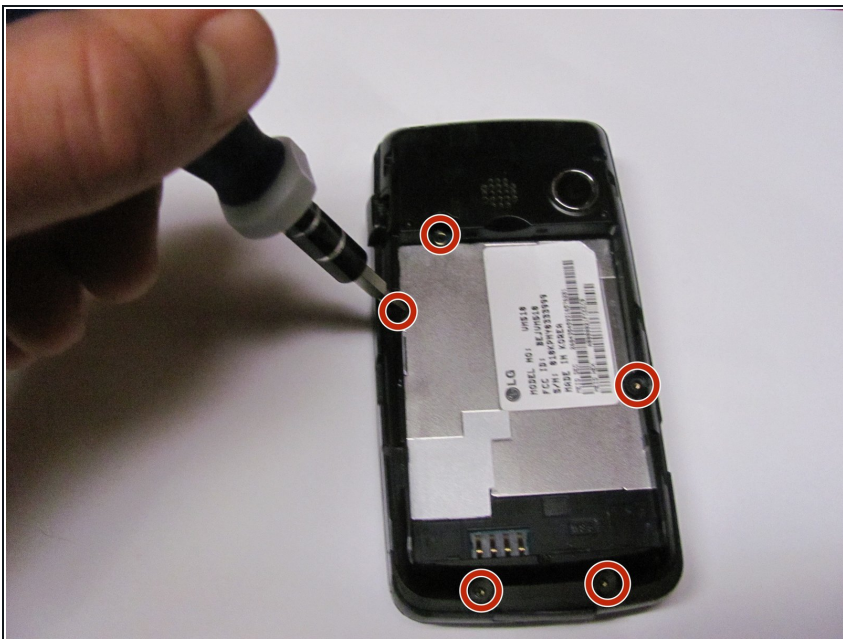

- Unscrew the 5 #1 5mm screws.

Step 4



- Lift the inner shell from the phone.

Step 5 — Motherboard



- Unscrew two 2mm #00 screws located behind the white serial code sticker.

Step 6




- Disconnect the ribbon found in the middle of the phone
- Gently pull the ribbon out of the way.

Step 7



- Slide open the phone, revealing the QWERTY keyboard.

Step 8

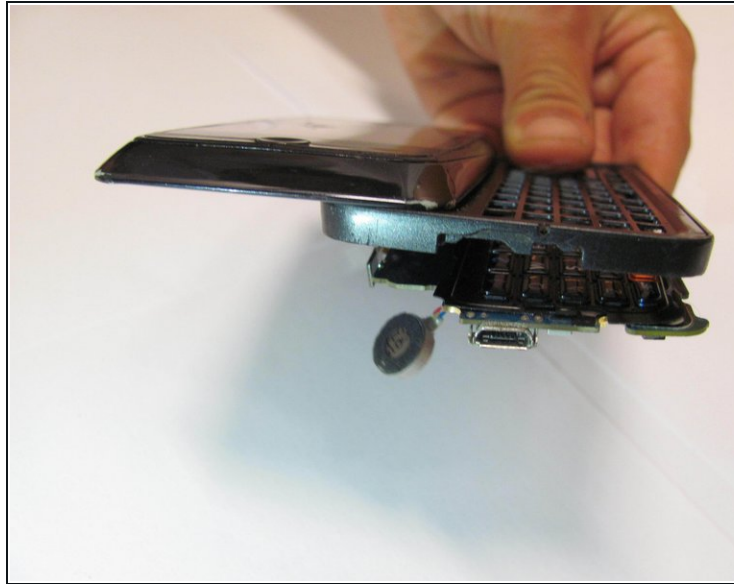

- Carefully push the mother board through by pressing into the keyboard.

Step 9



- The mother board will fall out of the back along with the silicon keyboard pad.

To reassemble your device, follow these instructions in reverse order.