



HP Pavilion DV1000 Screen Replacement

This guide will give step-by-step instructions on how to replace the screen on an HP Pavilion dv1000.

Written By: Tyler Latour





TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Spudger](#) (1)

Step 1 — Battery



- Shut down the computer.
- Disconnect all external devices and cables from the computer.

Step 2



- Flip the laptop over.

Step 3




- Locate the gray sliding tab next to the black bar where the battery is located.
- Slide the gray sliding tab to the left until you hear a distinct click.
- The inside edge of the battery should pop up.

Step 4



- Grasp the inside edge of the battery.
- Lift the inside edge of the battery up to detach the battery from the laptop.

Step 5 — Keyboard

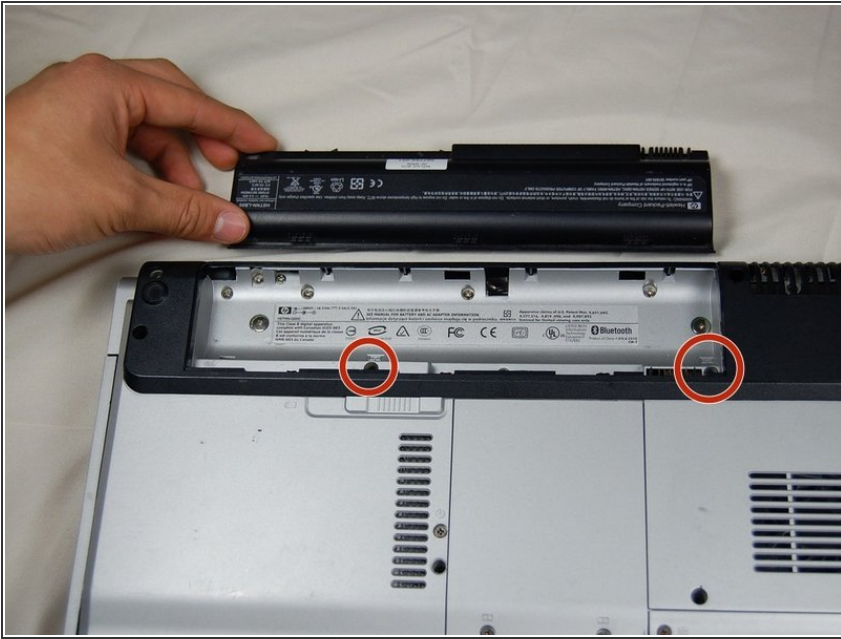

- Remove the highlighted screws.
- After removing the screws, flip the laptop over.

Step 6





- Open the laptop.
- Use the spudger to lift the keyboard.
- ⚠ Do not pull the keyboard up and away from the computer, because it is still attached by a ribbon cable.
- Press the two white clips forward with your fingers and gently pull the ribbon from the clips.

Step 7 — Media Keys



- Turn the laptop upside-down again.
- Remove the highlighted screws.

Step 8

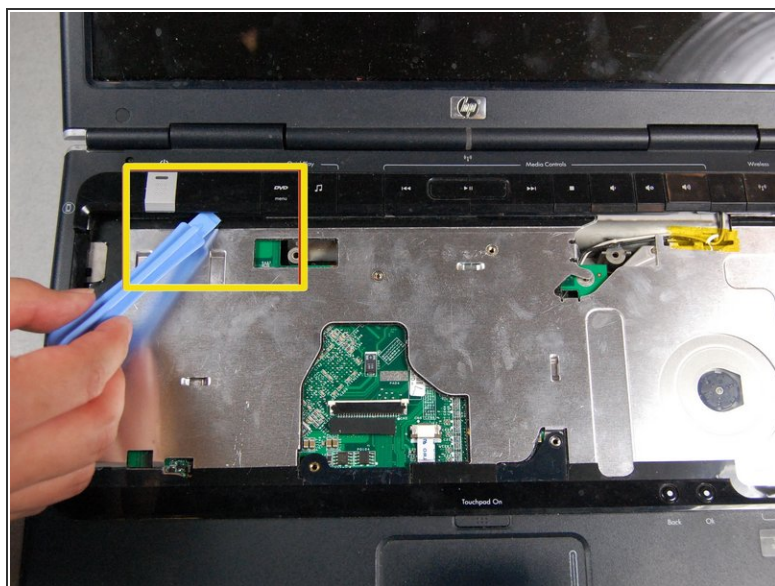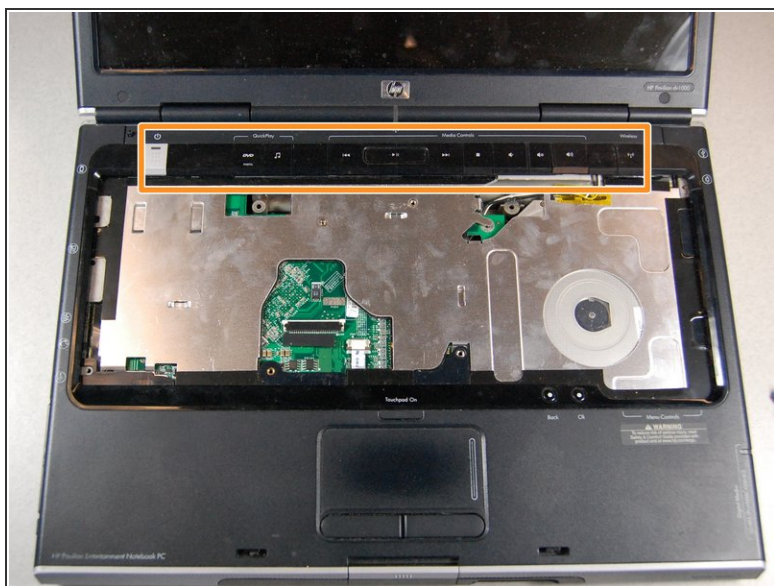


- Turn the laptop right-side up. Open the screen and tilt it all the way back.
 - Locate the media keys.
 - Gently lift up the media key strip using the plastic pry tool.
- ⚠ If there is too much resistance when prying, stop and search for cause of the resistance. Do not force the media keys.

Step 9 — Screen





- Remove the rubber inserts with the spudger.
- ⓘ Note: When reassembling, notice that the two lower rubber pieces are flatter than the four rubber pieces located at the top of the screen.
- Remove the screws behind the rubber inserts.

Step 10

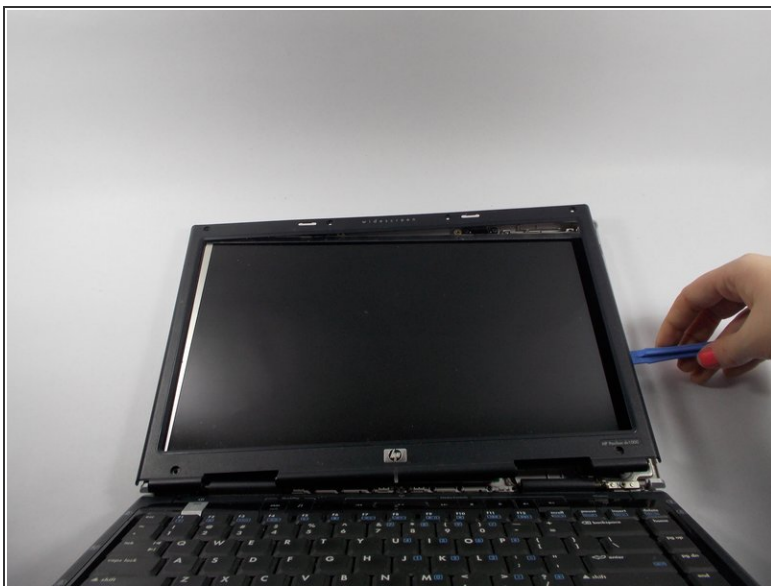

- Carefully pry loose the screen casing with a plastic prying tool.

Step 11

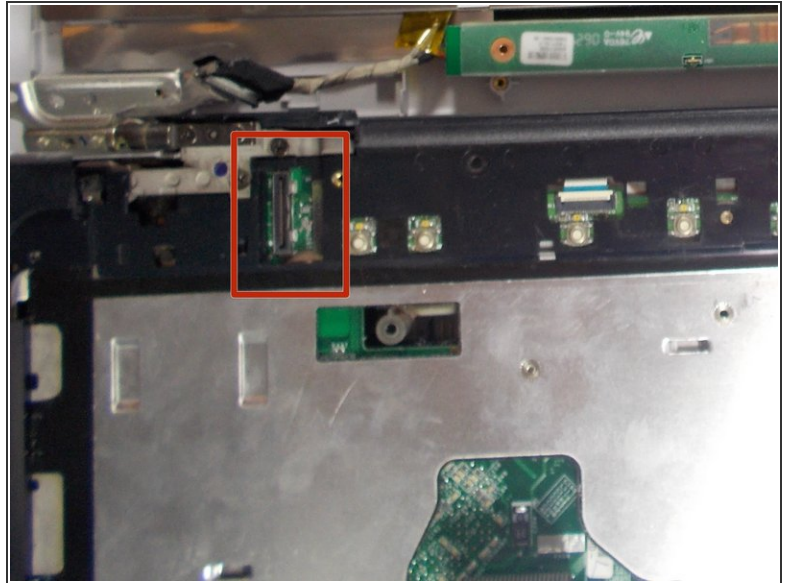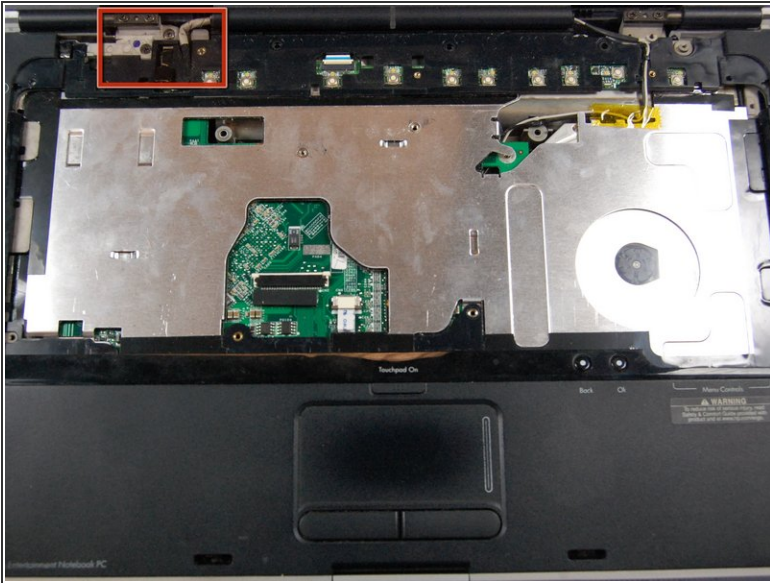

- Remove the plug by prying it loose with the spudger.

⚠ Pulling the plug with your fingers could be potentially dangerous unless you are wearing work gloves.


Step 12



- Remove the single screw marked in the image.

⚠ Be careful not to break the clips or pull any wires.


Step 13

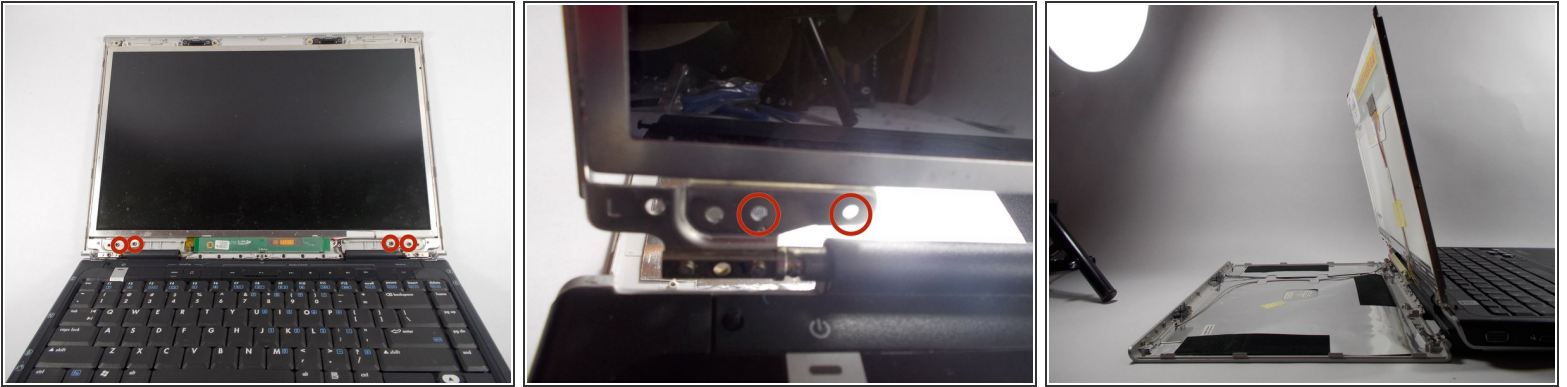

- Remove the 4 screws marked in the picture.

⚠ Support the back cover and set it down on the desk. Do not pull off the back cover.

Step 14

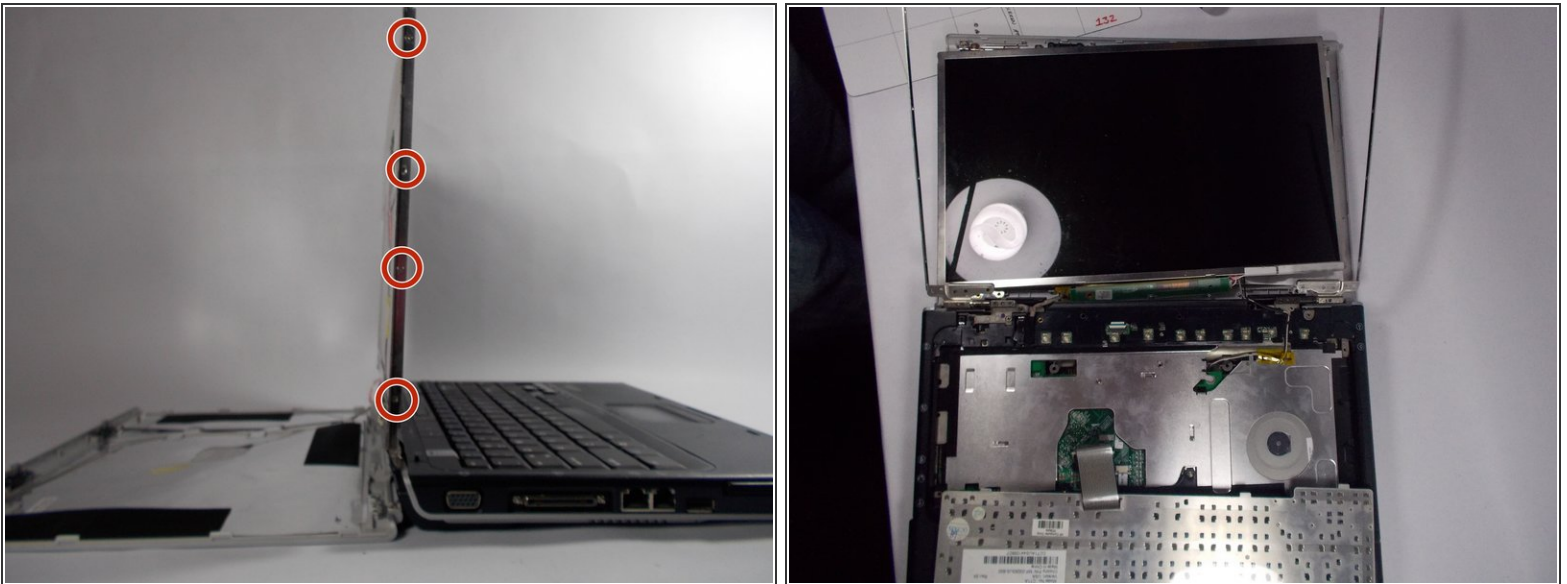

- Remove the screws on each side of the screen. There are four screws on each side.
- Remove the screen.

To reassemble your device, follow these instructions in reverse order.