



Disassembling Motorola i850 Keypad

Written By: Tony Chen



INTRODUCTION

A procedure in replacing the keypad of the device.



TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [Tweezers](#) (1)
-

Step 1 — Disassembling Motorola i850 Back Cover



- Use your thumb to slide the back cover locker away from the antenna.

Step 2



- Slide the back cover towards the antenna while lifting the cover away from the phone.

Step 3 — Battery



- Place your thumb on the indicated corner while stabilizing the phone and the upper portion of the battery with your forefinger.

Step 4





- Lift the battery out of the phone while pushing it towards the antenna.

Step 5 — Keypad



- Once battery is removed, untighten the screws located near the edges of the device with a Phillips #00 Screwdriver.


Step 6

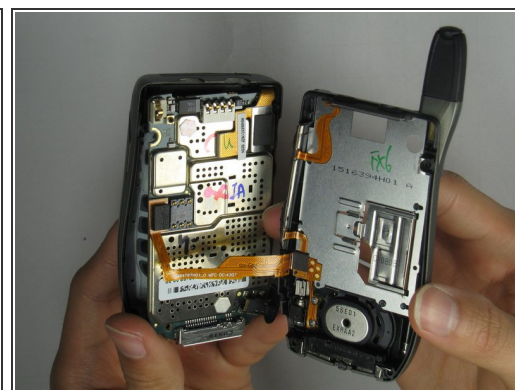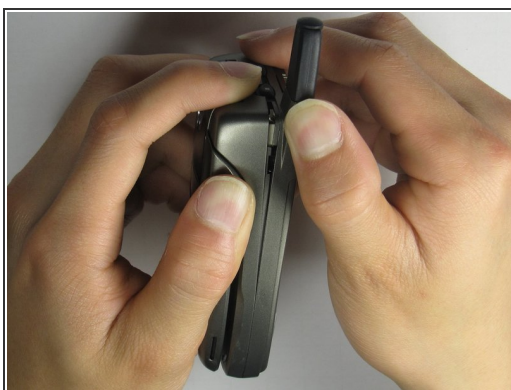

- Grip the device firmly with both hands and carefully open the device.

⚠ Warning: Interior hardware inside the device can be easily damaged.

Step 7

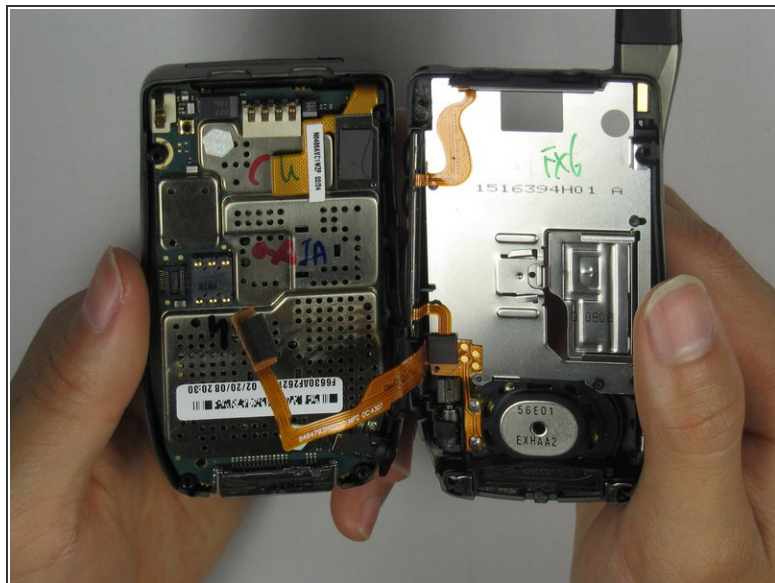

- Carefully remove the hardware by gripping the side of the hardware attachment with a tweezer.

Step 8




- Carefully grip the side of the hardware attachment with a tweezer and detach from device.

Step 9



- Place the back of the device on your hand and flip it over with the other hand.
 - Carefully lift the device to remove interior hardware.
- i** The structure of the keypad should easily be loose from flipping the device.

Step 10

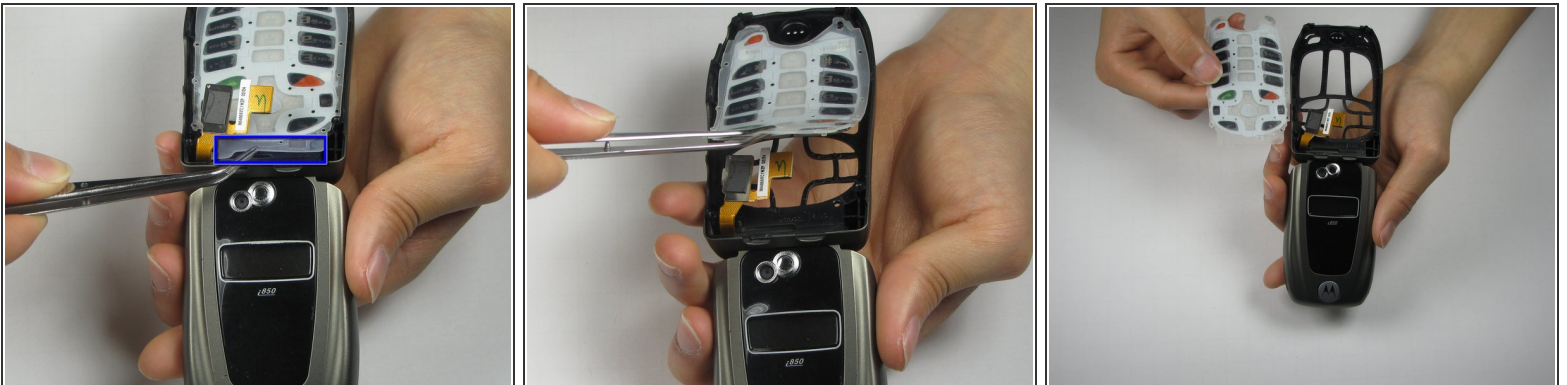

- Carefully remove the keypad by gripping on the side of the plastic with a tweezer.

⚠ WARNING: The plastic keypad is sensitive and can be easily damaged.

To reassemble your device, follow these instructions in reverse order.