

Siemens A56 Back Plastic Cover Replacement

This guide will remove the internal back plastic cover of the Siemens A56. This cover attaches the frame of the phone to the motherboard and other vital components.

Written By: Joseph Casey



INTRODUCTION


In order to reach the internal components of the Siemens A56, the back plastic cover must be removed.



TOOLS:


- T5 Torx Screwdriver (1)
- iFixit Opening Tools (1)

Step 1 — Battery

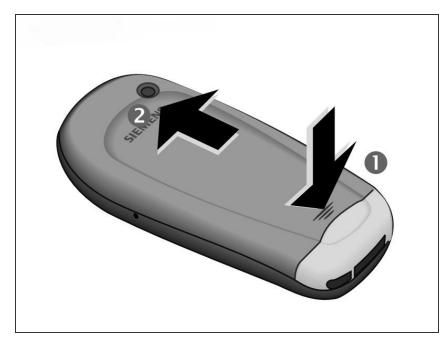

- Press down on the grooved area firmly in the direction of arrow #1.
- While maintaining the downwards pressure, push the back cover in the direction of arrow #2 until the back cover slides off.
- Photos taken from:
 http://theinformr.com/uploads/manuals/s/si...


Step 2

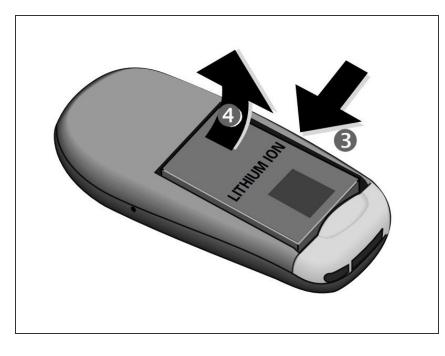

- Turn off the phone before removing the battery to avoid damage.
- Press the latch on the battery in the direction of arrow #3.
- Lift battery at the cutout on the side of the phone, then tilt upwards and remove.
- it may be necessary to use the tip of a fingernail or a plastic lifting tool to remove the battery.
- Photos taken from:
 http://theinformr.com/uploads/manuals/si...

Step 3 — Front Plate







- Firmly grasp the white casing of the phone with one hand and the blue cover with the other hand as seen in the first picture.
- Pull up on the two plastic clips at the top of the phone.
- While the clips are pulled up, pull the blue cover away from the white casing to remove it.

Step 4 — Back Plastic Cover








- Along the side of the metal frame of the phone, locate the six screws.
- Using a T5 screwdriver bit, unscrew the six 1/4 inch screws and store them in a safe place.
- The screws are very small and can strip easily, so proper care is required when removing and storing the screws.

Step 5







- To remove the back plastic cover, grasp the device with both hands as seen in the first picture.
- Gently remove the motherboard from the back plastic cover.
- The motherboard is fragile, so proper care is necessary when handling and storing in order to prevent damage.

To reassemble your device, follow these instructions in reverse order.