



Disassembling Nokia 6236i Keypad

This guides you through removing the keypad.

Written By: Erik Lindahl




INTRODUCTION

This guides you through removing the keypad.

TOOLS:


[2.5 mm Flathead Screwdriver](#) (1)

Step 1 — Battery

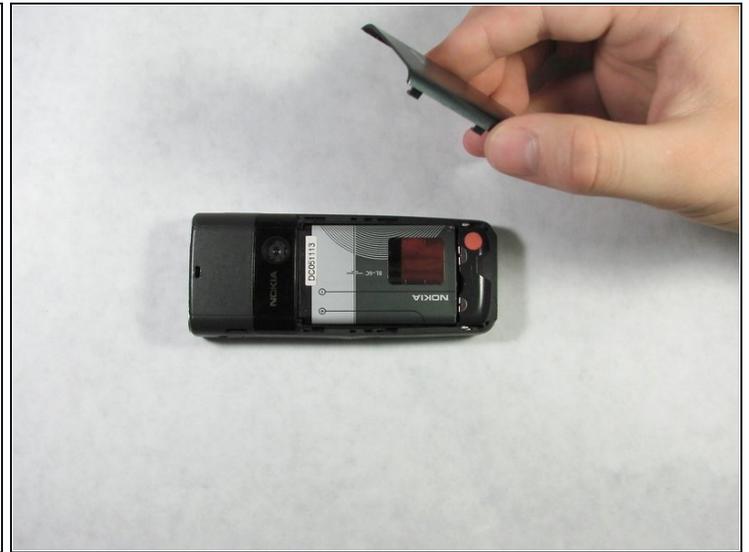

- Using your thumb, apply pressure to the battery casing (below the camera). Firmly pull towards the bottom of the phone.
- Lift the battery case off of the phone.

Step 2

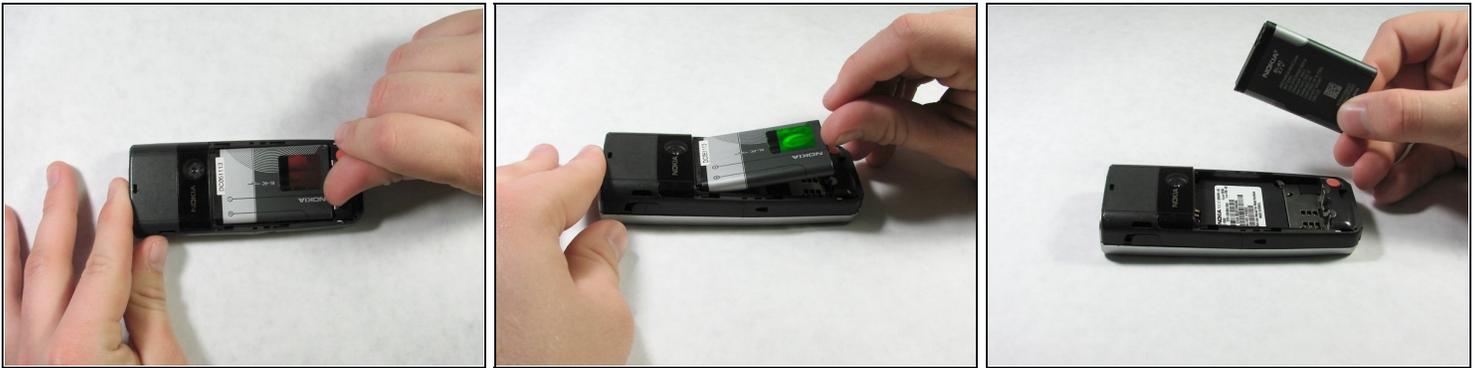


- Use your thumb to get underneath the battery and pull up and out from the bottom of the battery tray.
- The battery should lift out with minimal resistance.

Step 3 — Front Casing



- Insert a spudger into the indentation on the bottom right side of the device.
- Slide the spudger upward to a second indentation at the top of the phone.
- The front casing will detach from the phone.

Step 4 — Keypad

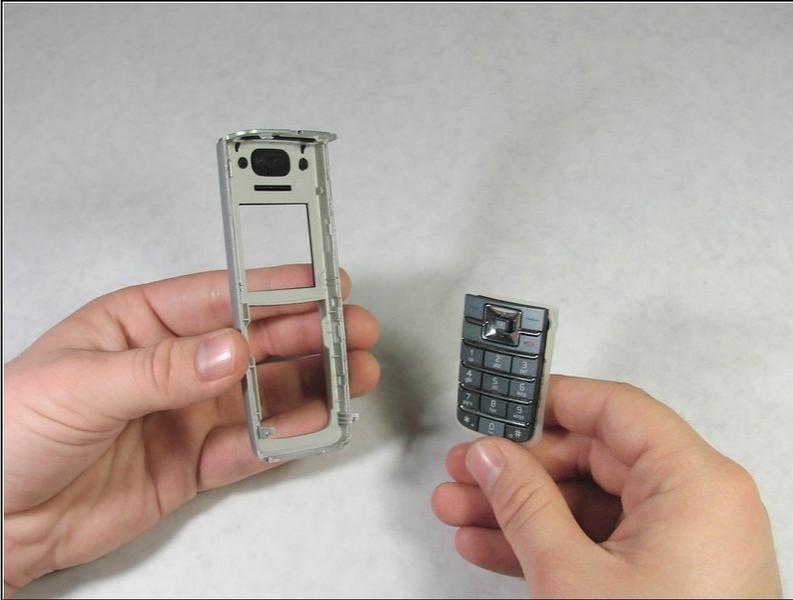

- With the front casing removed, the keypad can easily be pulled off the back of the front casing.
- In all probability, it will already have fallen out and no removal is required.

To reassemble your device, follow these instructions in reverse order.