




DYMO LabelPOINT 100 Rubber Transport Roller Replacement

Replace a damaged rubber transport roller

Written By: Deborah Canas

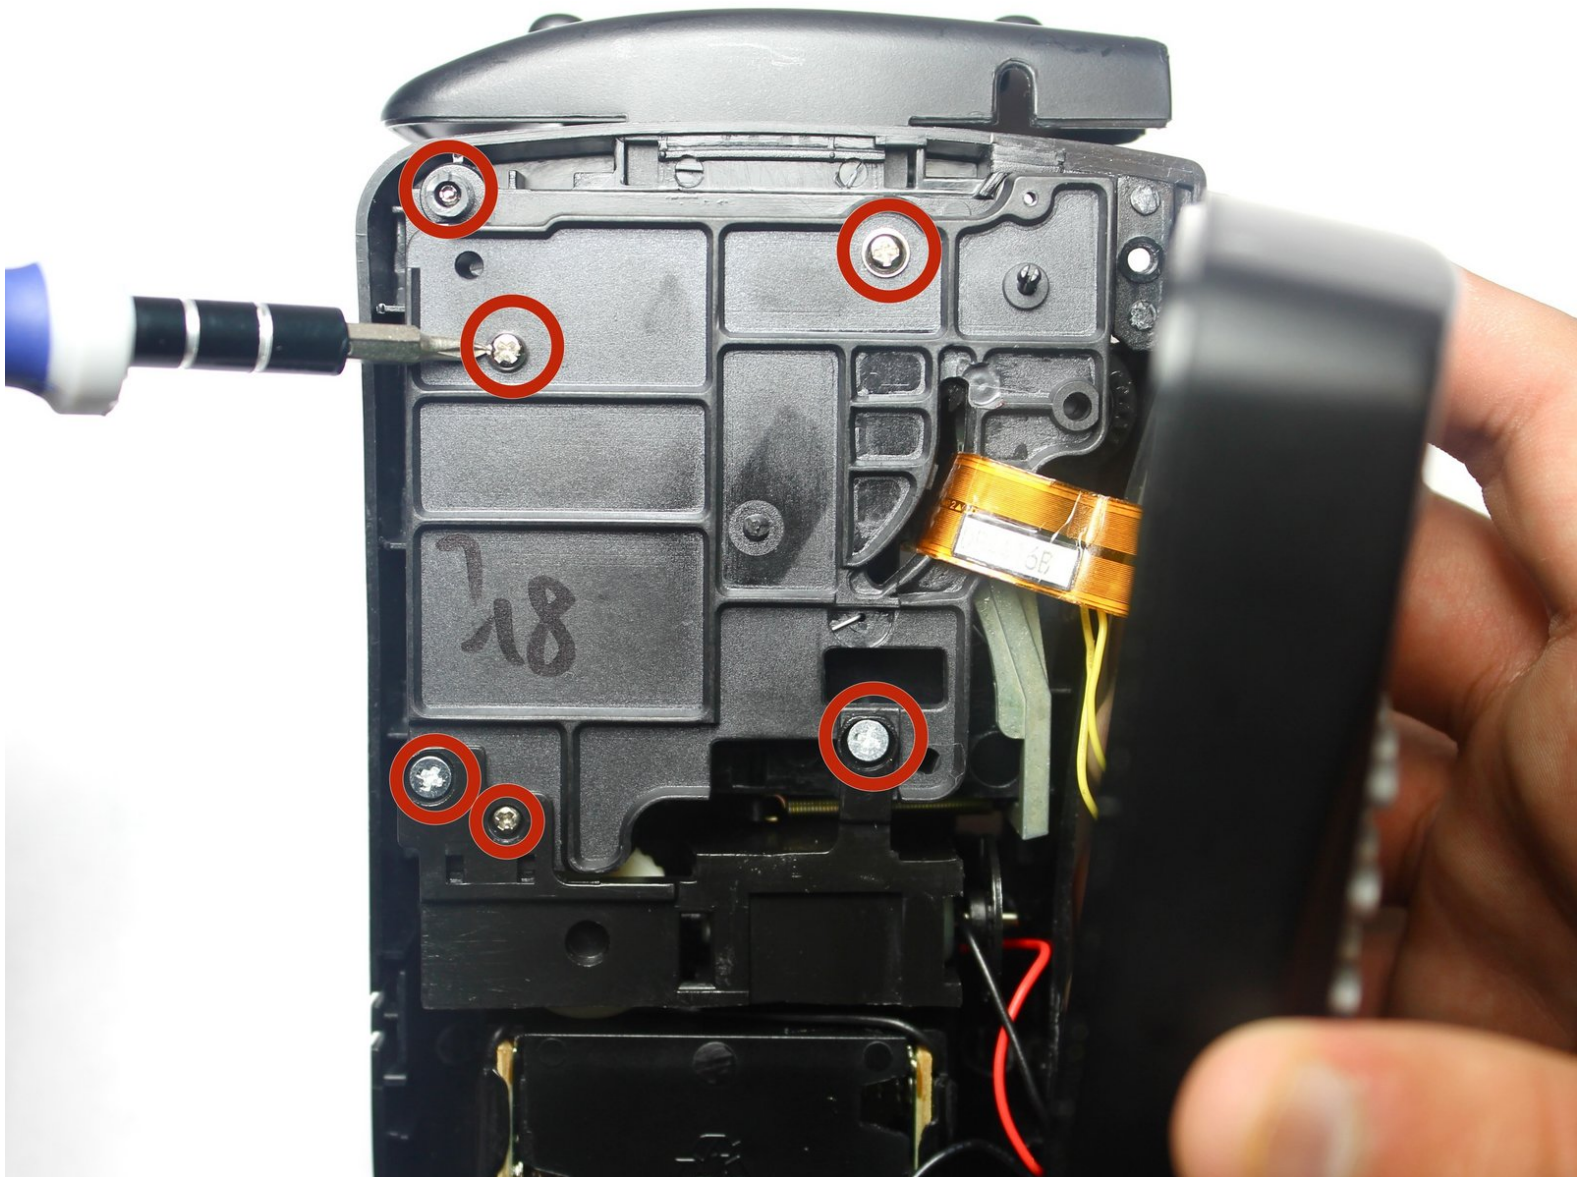

**TOOLS:**

- [Phillips #00 Screwdriver](#) (1)

**PARTS:**

- [Rubber Transport Roller](#) (1)

Step 1 — Rear Panel



- Slide the panel release button.
- Lift the panel.

Step 2 — Remove Label Tape Cassette



- Firmly press the cartridge release button with your finger.
 - You may need to hold the cassette and/or entire device still while pressing the button.
- Lift the label tape cassette out of the device.

Step 3 — Remove Screws To the Access Panel



- Use Phillips #00 screwdriver to remove three screws
- Remove blade cutter
- Use Phillips #00 screwdriver to remove remaining two screws from the battery compartment


Step 4



- Gently pull the access panel up to separate from the device


⚠ Some electrical wiring will be exposed and will not detach. Be careful not to damage any electrical wiring when removing access panel.

Step 5 — Remove Back Panel

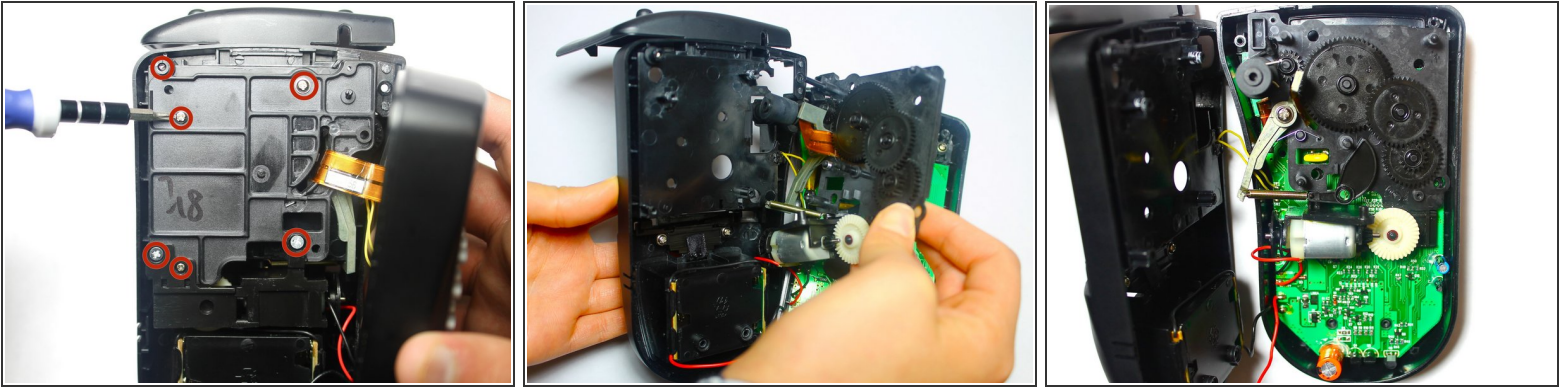

- Use Phillips #00 screwdriver to remove six screws
 - Slowly separate back panel
- ⚠ Gears attached to the back panel are not secured and have a tendency to fall out. This will cause difficulty when reassembling

Step 6 — Remove Rubber Transport Roller

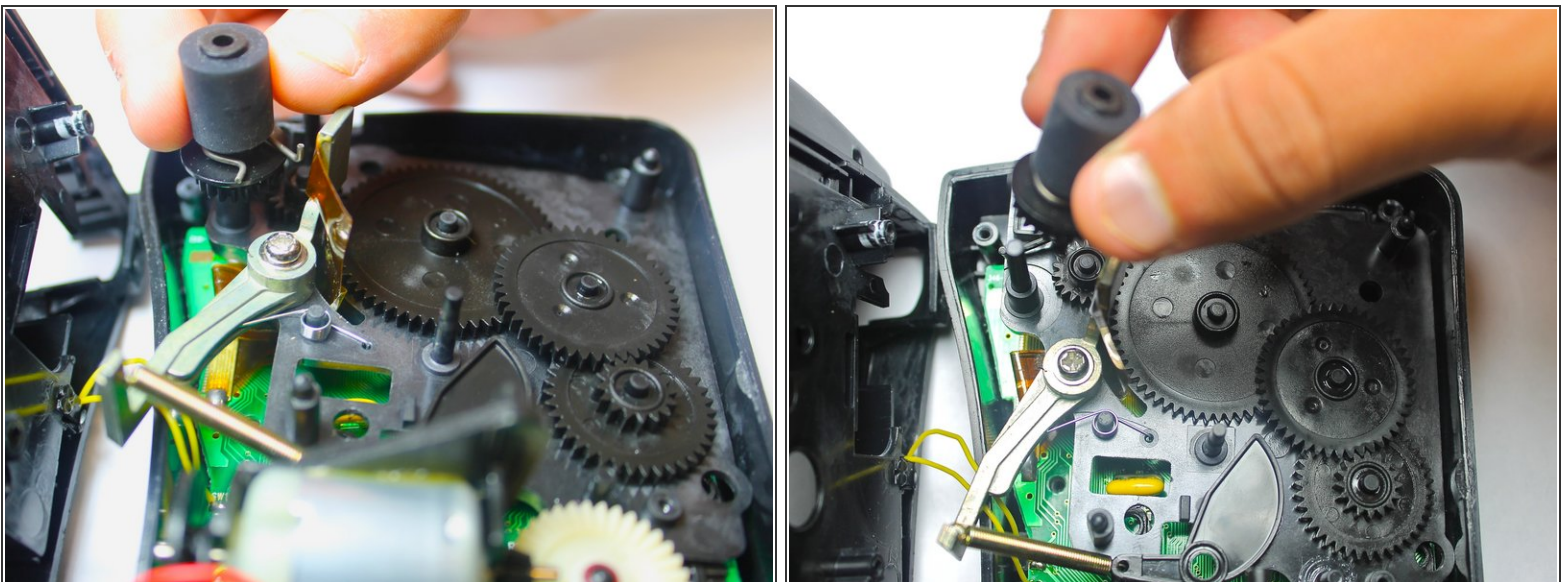

- Gently pull rubber transport roller up to remove
- Replace rubber transport roller

To reassemble your device, follow these instructions in reverse order.