



Oppo X9000 Rear Camera Replacement

Replacement guide for the rear camera on your Oppo X9000.

Written By: Sara Dafoe



INTRODUCTION

This camera is the 13 MP camera visible after removing the chassis. It is the easier of the two cameras to replace.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Removing the Back Cover




- Turn the phone over so that you are facing the back side of the phone.
- With your fingers, pry the back cover up starting from the top of the phone near the headphone jack and camera.
- Completely remove the back cover by moving down the sides and bottom with your fingers.

Step 2 — Removing the Battery



- With your finger, remove the battery from the phone by gently lifting the top-right corner nearest to the camera.

Step 3 — Remove the Back Panel Screws

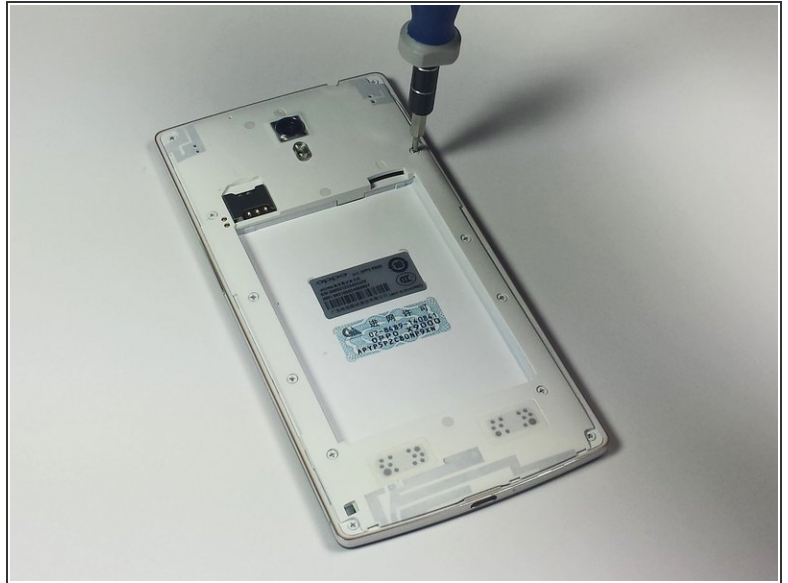

- Remove the twelve exposed 3.6 mm Phillips screws on the rear of the phone using the 3.6 mm Phillips screwdriver.
- ⚠ Store all the screws in a safe place where you will not lose them.

Step 4 — Remove the Rubber Stoppers





- Remove the three circular rubber screw covers on the back of the phone by slipping the spudger into the border between the rubber cover and the chassis. In one motion, pry the stopper out of the hole. This can take some force.

Step 5 — Remove the Newly Exposed Screws




- With the 3.6 mm Phillips screwdriver, remove the three newly exposed 3.6mm Phillips screws.

Step 6 — Lift off the Back Panel

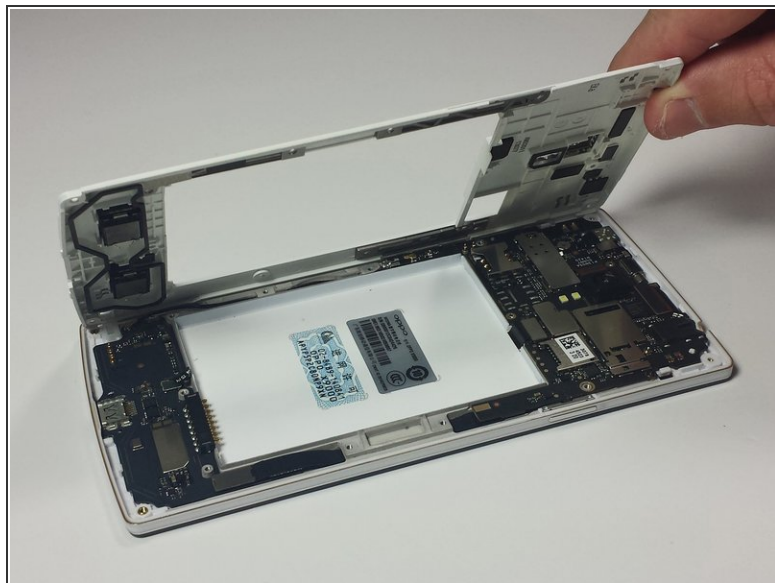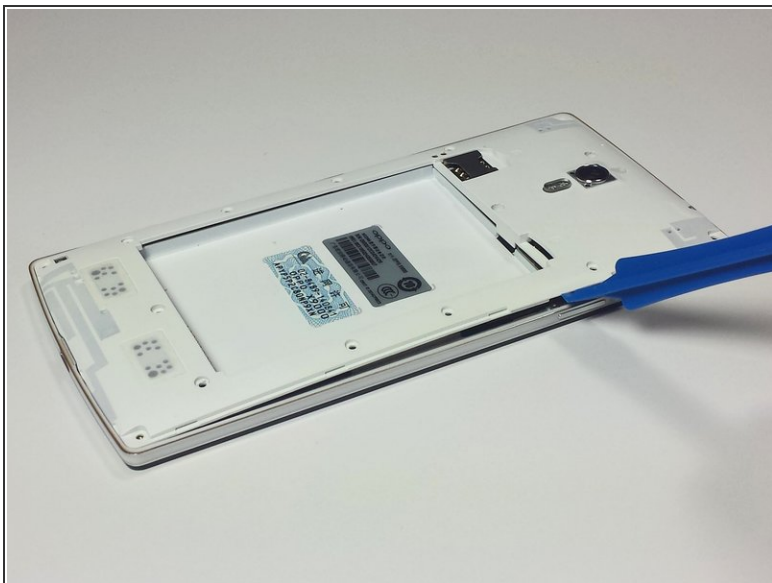

- Insert the plastic opening tool underneath the chassis near the power button and pry the chassis from the phone. This should take a little force.

Step 7 — Rear Camera

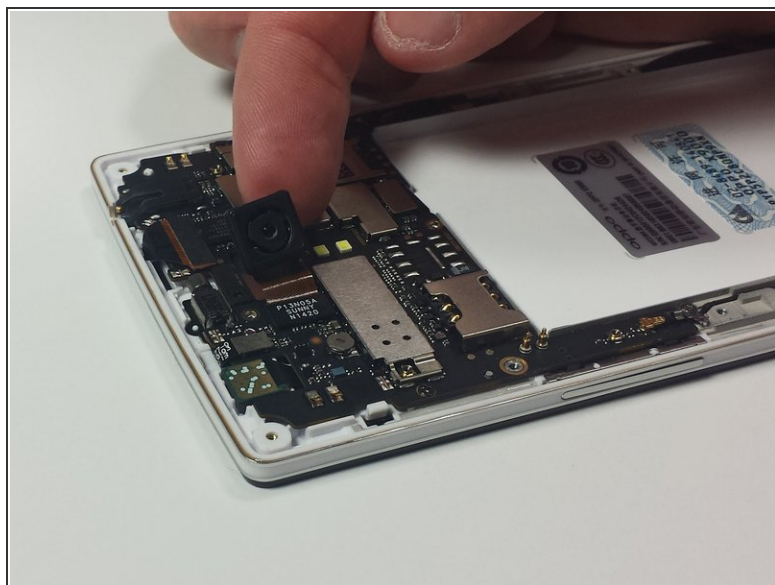

- Use your fingers to pull the camera straight up from the motherboard to fully detach the camera.

To reassemble your device, follow these instructions in reverse order.