




Equity Alarm Clock 13014 Alarm Switch Replacement

This guide details the process of an Equity...

Written By: Alaa

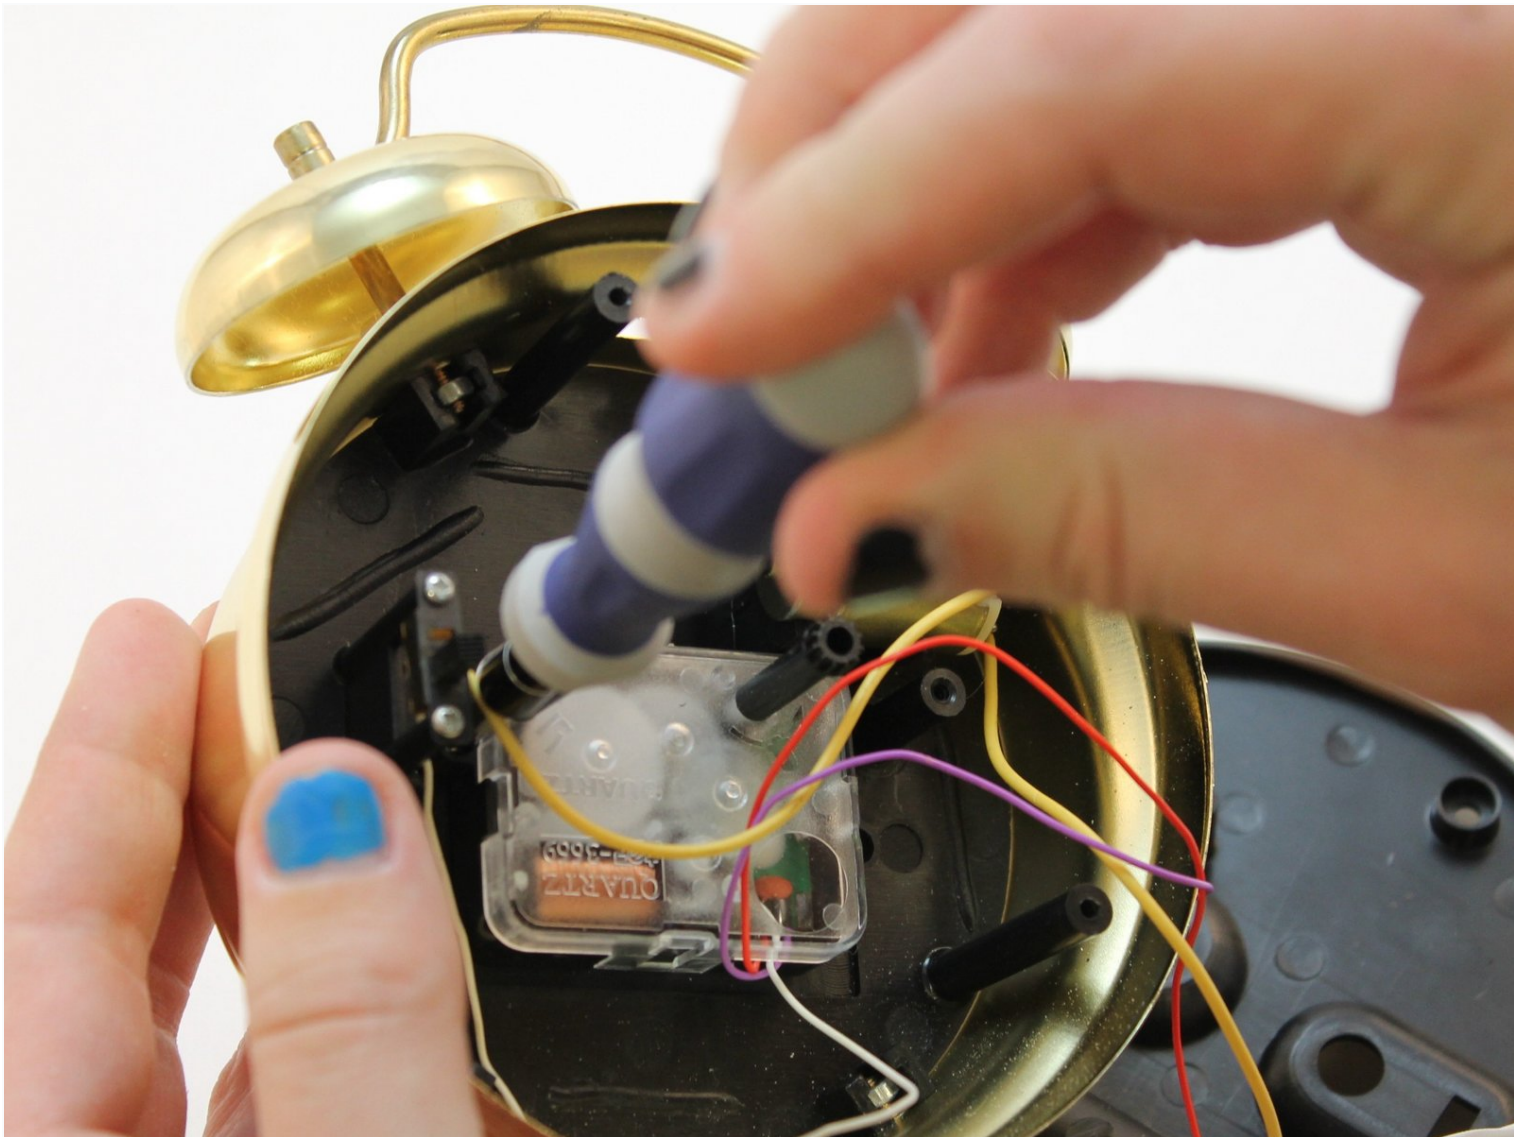

INTRODUCTION



This guide details the process of an Equity Alarm Clock 13014 Alarm Switch Replacement. The alarm switch activates the alarm when it's set to go off. This guide requires some basic soldering.

TOOLS:

Phillips #1 Screwdriver (1)


Soldering Iron 60w Hakko 503F (1)

Step 1 — Replacing the alarm switch

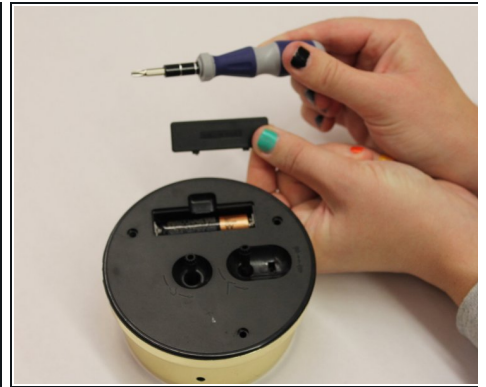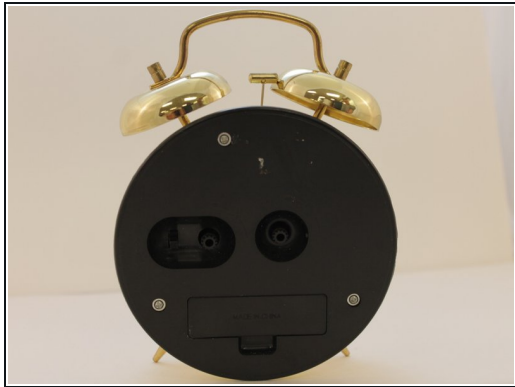

- Remove the battery door using your finger nail or an opening tool.

Step 2 — Remove screws

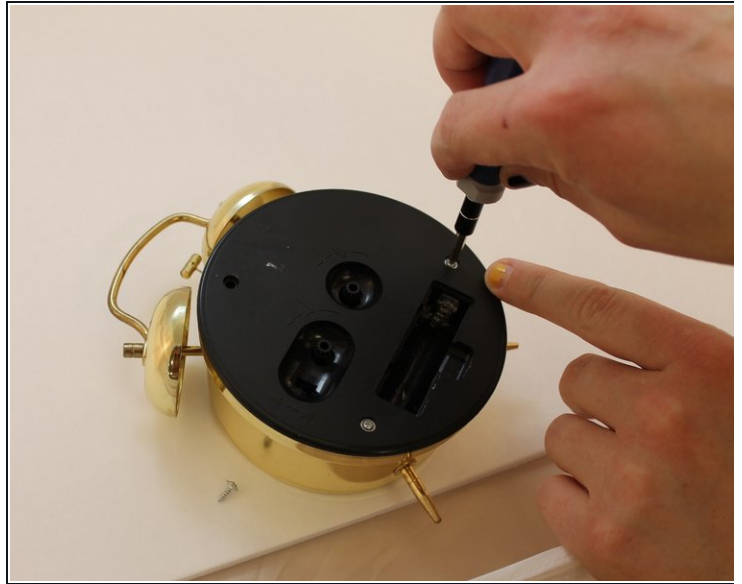

- Use a Phillips #1 screwdriver to remove the 3 screws on the back cover.



Step 3 — Remove Cover



- Remove the back cover gently.


⚠ DO NOT pull the back cover off quickly or you may damage the wires connected.

Step 4

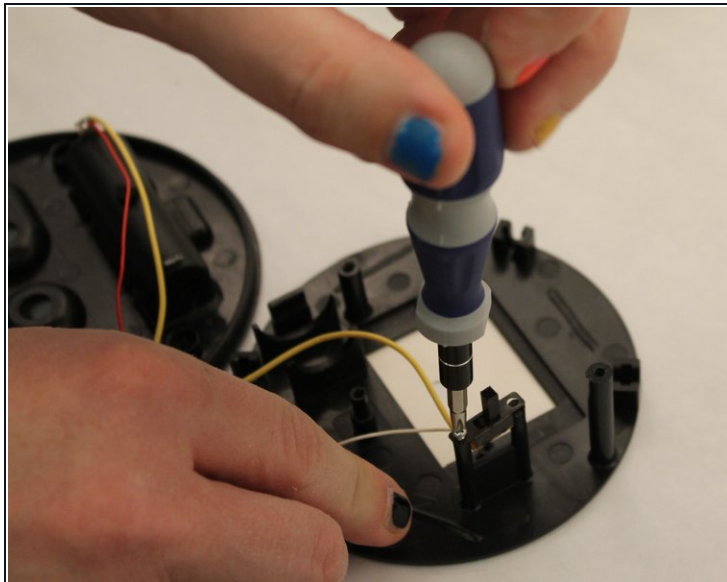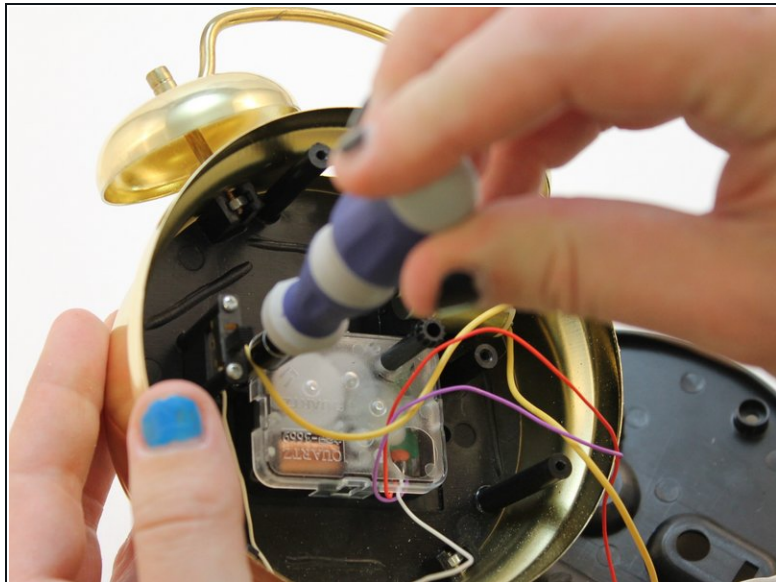

- Use a Phillips #1 screwdriver to remove the small screw located *above* the alarm switch.
- Remove the small screw located *below* the alarm switch as well.

Step 5

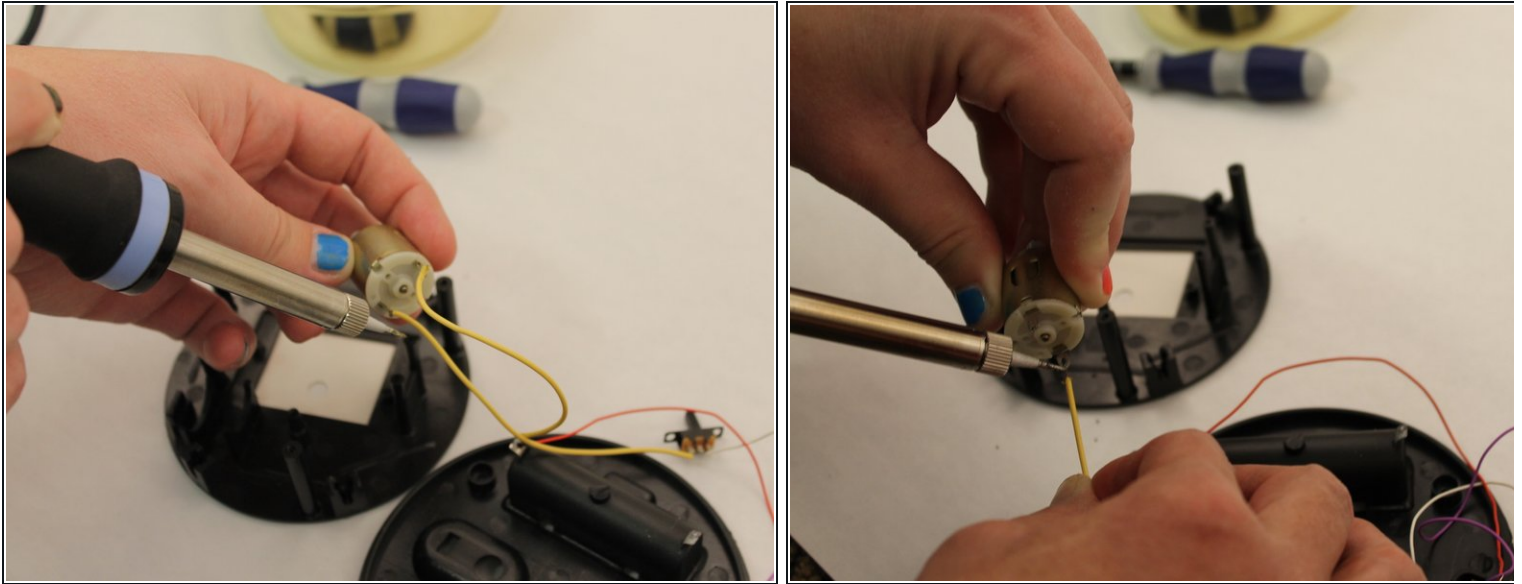

- Place the end of the soldering iron on the end of the wire connected to the copper cylinder to detach the wire.
- ① If you are unfamiliar with soldering, take a look at this article: [How to Solder and Desolder Connections](#).
- To replace the alarm switch, attach one end of new alarm switch wire to the copper cylinder.
- Use a Phillips #1 screwdriver to reinstall the switch screws.
- ☑ Follow steps in reverse order to assemble the clock.

To reassemble your device, follow these instructions in reverse order.