




Samsung Galaxy SIII Mini VE Rear Camera Replacement

If the rear camera in your Galaxy SIII Mini VE is broken or malfunctioning, this guide will show you the steps to replace it.

Written By: Megan

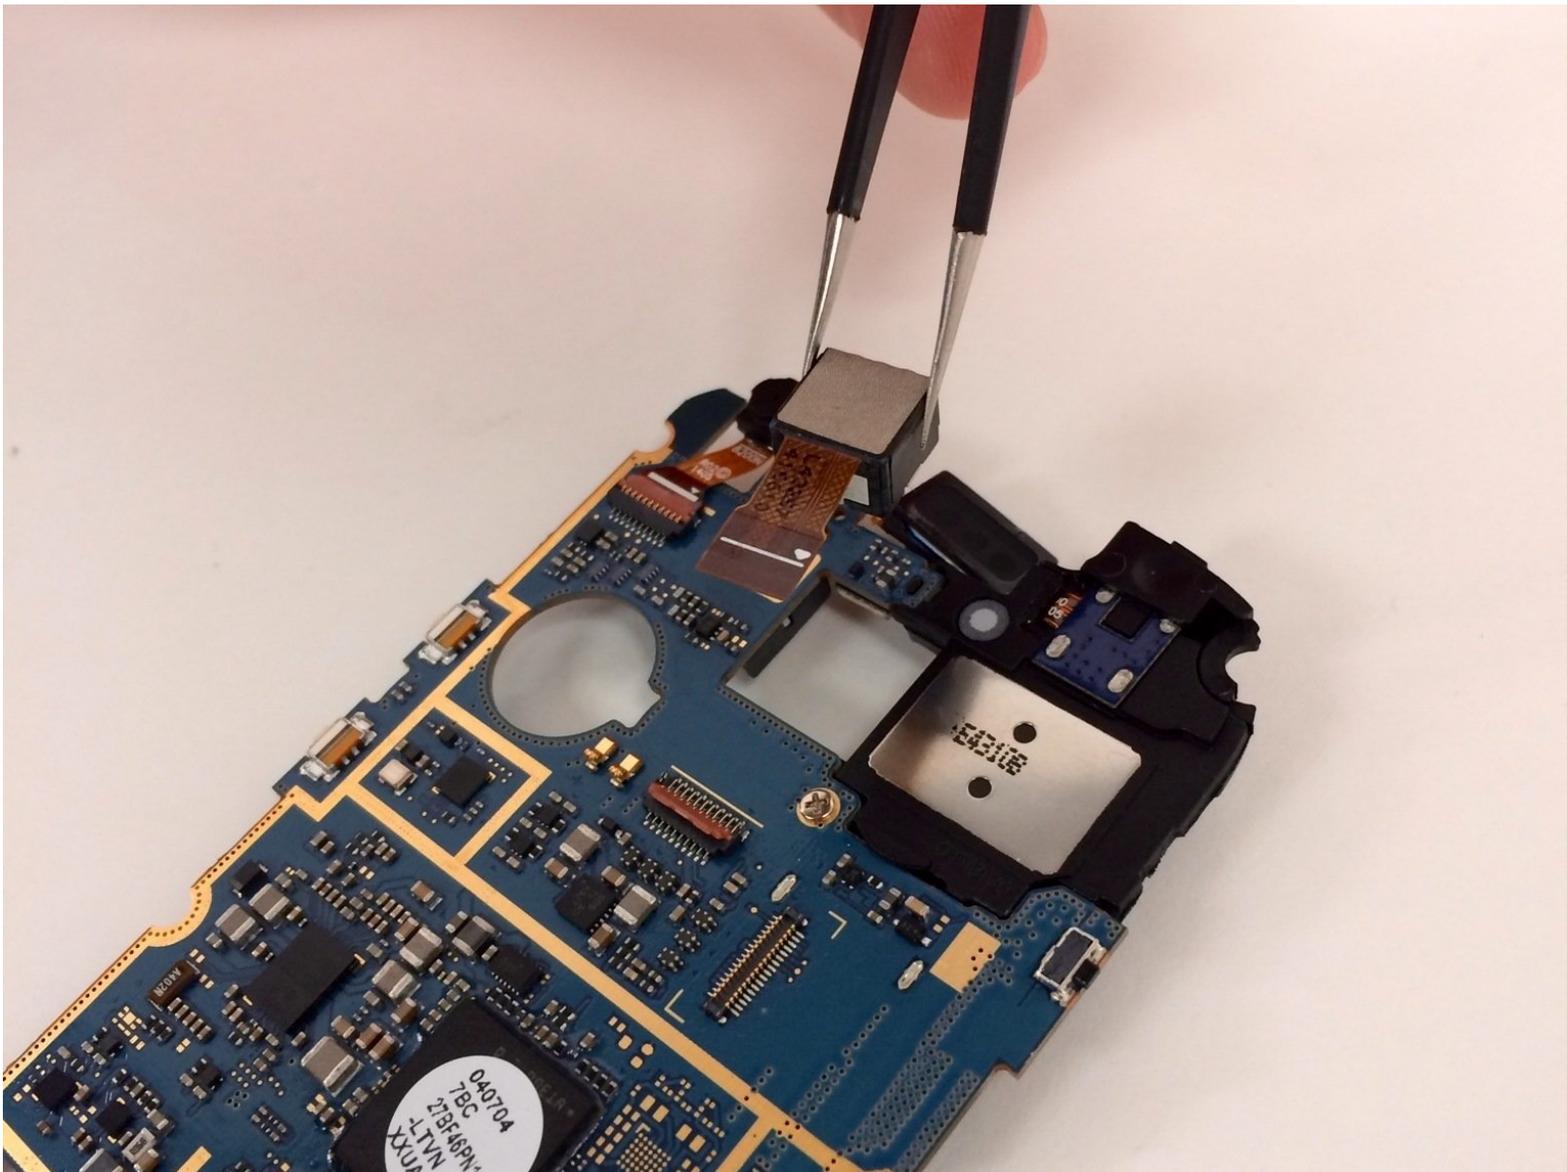

This document was generated on 2020-11-20 02:12:38 PM (MST).

INTRODUCTION

You can replace the rear camera on your Galaxy SIII Mini VE using these steps.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
 - [iFixit Opening Tools](#) (1)
 - [Spudger](#) (1)
-

Step 1 — Removing Rear Casing



- Flip your phone so you are facing the back.
- Locate the notch at the top and gently use your finger or an opening tool to remove the rear casing.

Step 2 — Removing Battery




- Use your finger or an opening tool to pry the battery out of the phone.

Step 3 — Removing Screws




- Use the Phillips #000 Screwdriver to remove the 10, 4mm screws holding the plastic frame in place.

Step 4

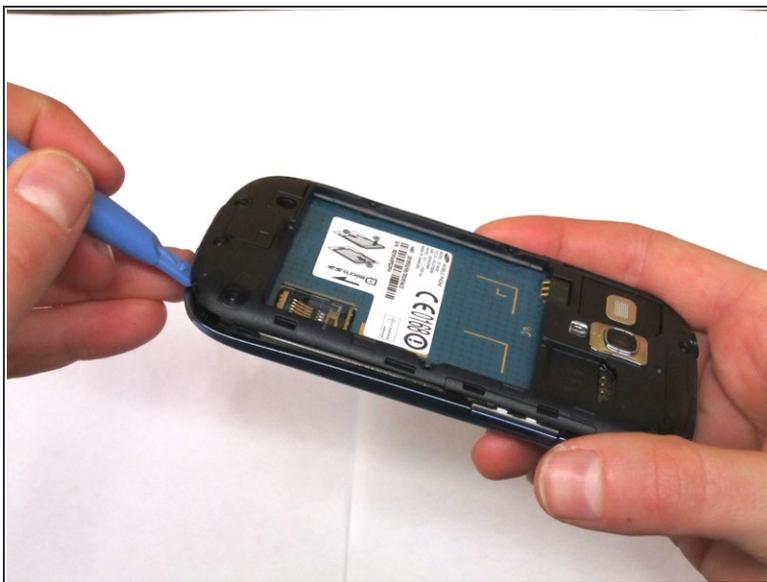


- Using an opening tool, gently separate the plastic framing from the phone.

Step 5 — Removing Circuit Board

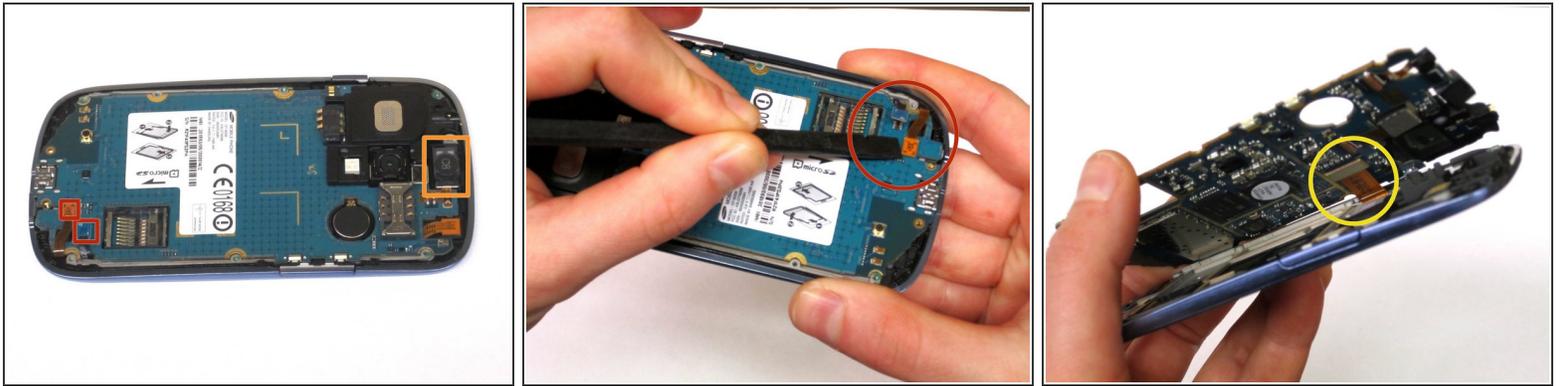

- Unhook the two electrical connections at the bottom of the phone using your fingernail or a spudger.
- Next, use the spudger and tweezers to remove the speaker at the top of the phone.
- Once the 3 components have detached, the circuit board should release from the phone except for 1 connection on the underside.
- Detach this connection using the spudger.

Step 6 — Removing Camera

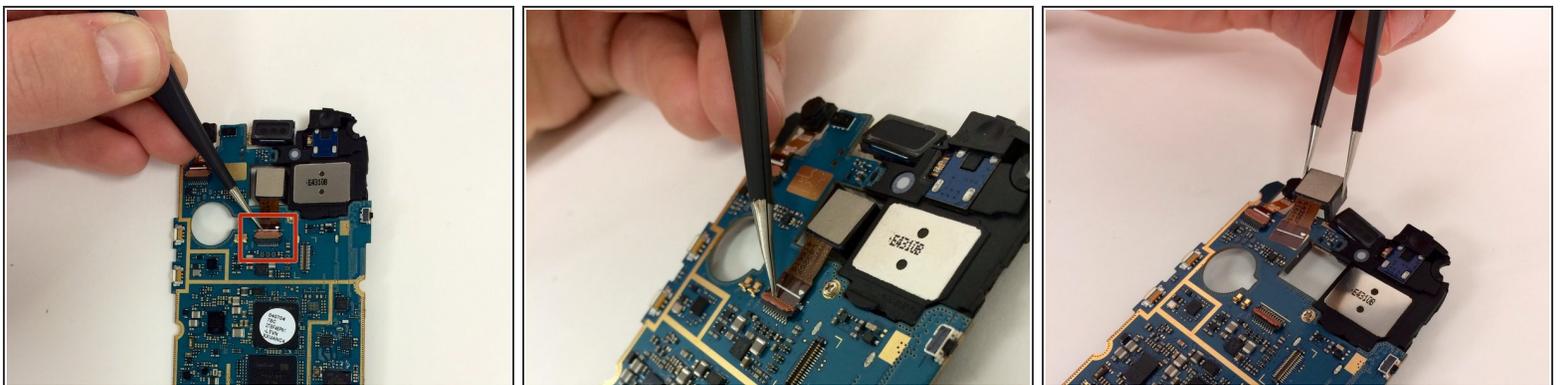

- Flip the holding tab to the open position.
- Gently, separate the rear camera and the motherboard.

To reassemble your device, follow these instructions in reverse order.

