



Smart Tweezers and LCR-Reader LCR-meter Screen Replacement

This guide shows how to replace the screen on Smart Tweezers ST-5S and LCR-Reader.

Written By: brittany



INTRODUCTION

Before opening the LCR-Reader, place a small bit of tape over the button on the top housing. This will keep the button from falling loose and being lost.



TOOLS:


- [Phillips #00 Screwdriver](#) (1)



PARTS:



- [Smart Tweezers replacement screen](#) (1)

Step 1 — Opening the device

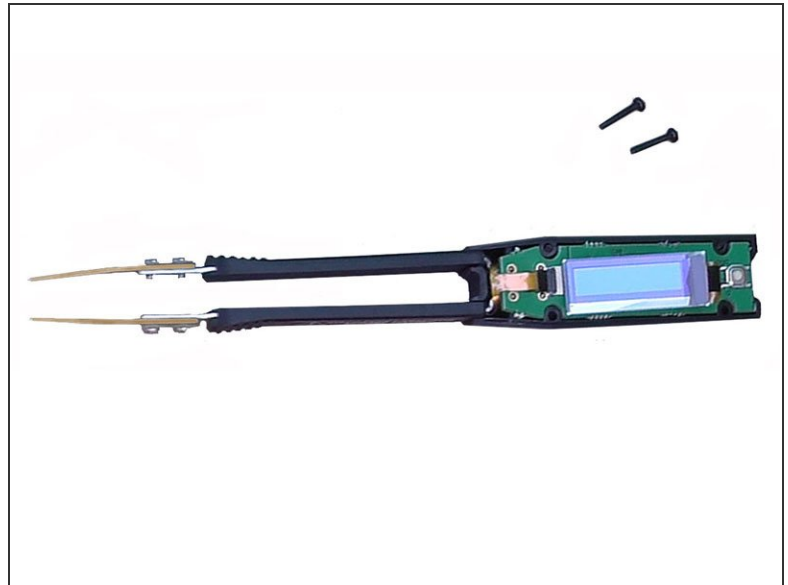


- Start by removing the 4 screws in the back of the device using a size 00 Philips screw driver.

Step 2 — Replacing the screen

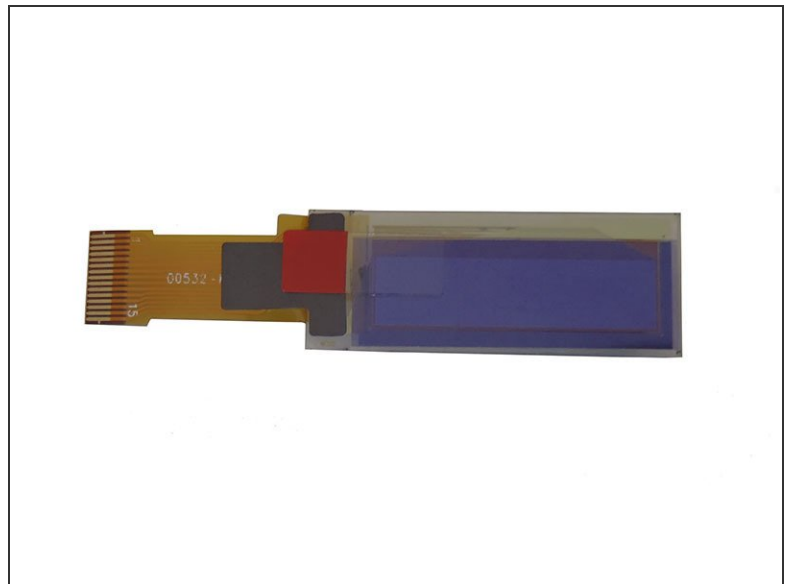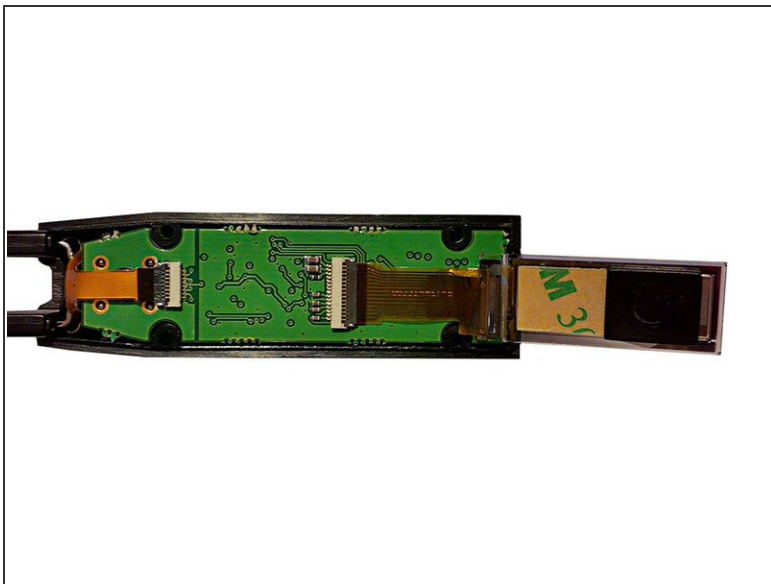

- Gently open the zif connector that holds the screen.
- Insert the replacement screen, and close the zif

Step 3 — Closing the device

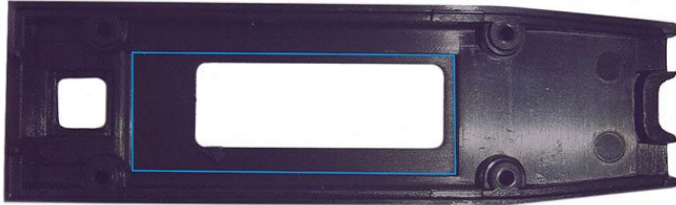

- When closing the housing, make sure the screen fits into the rectangle on the top.
- If the screen is not in this rectangle, it may become damaged when the screws are tightened
- Hold the screen in place from below; line up the button's edge of the top housing to line up with the bottom housing. Slide your finger out as you bring the top and bottom housings to meet.
- Replace the 4 Philips screws in the back.