




# DOPO 10.1 Tablet Battery Replacement

This guide will show you how to replace a battery that is either faulty, or drained.

Written By: Kaitlyn Hayes

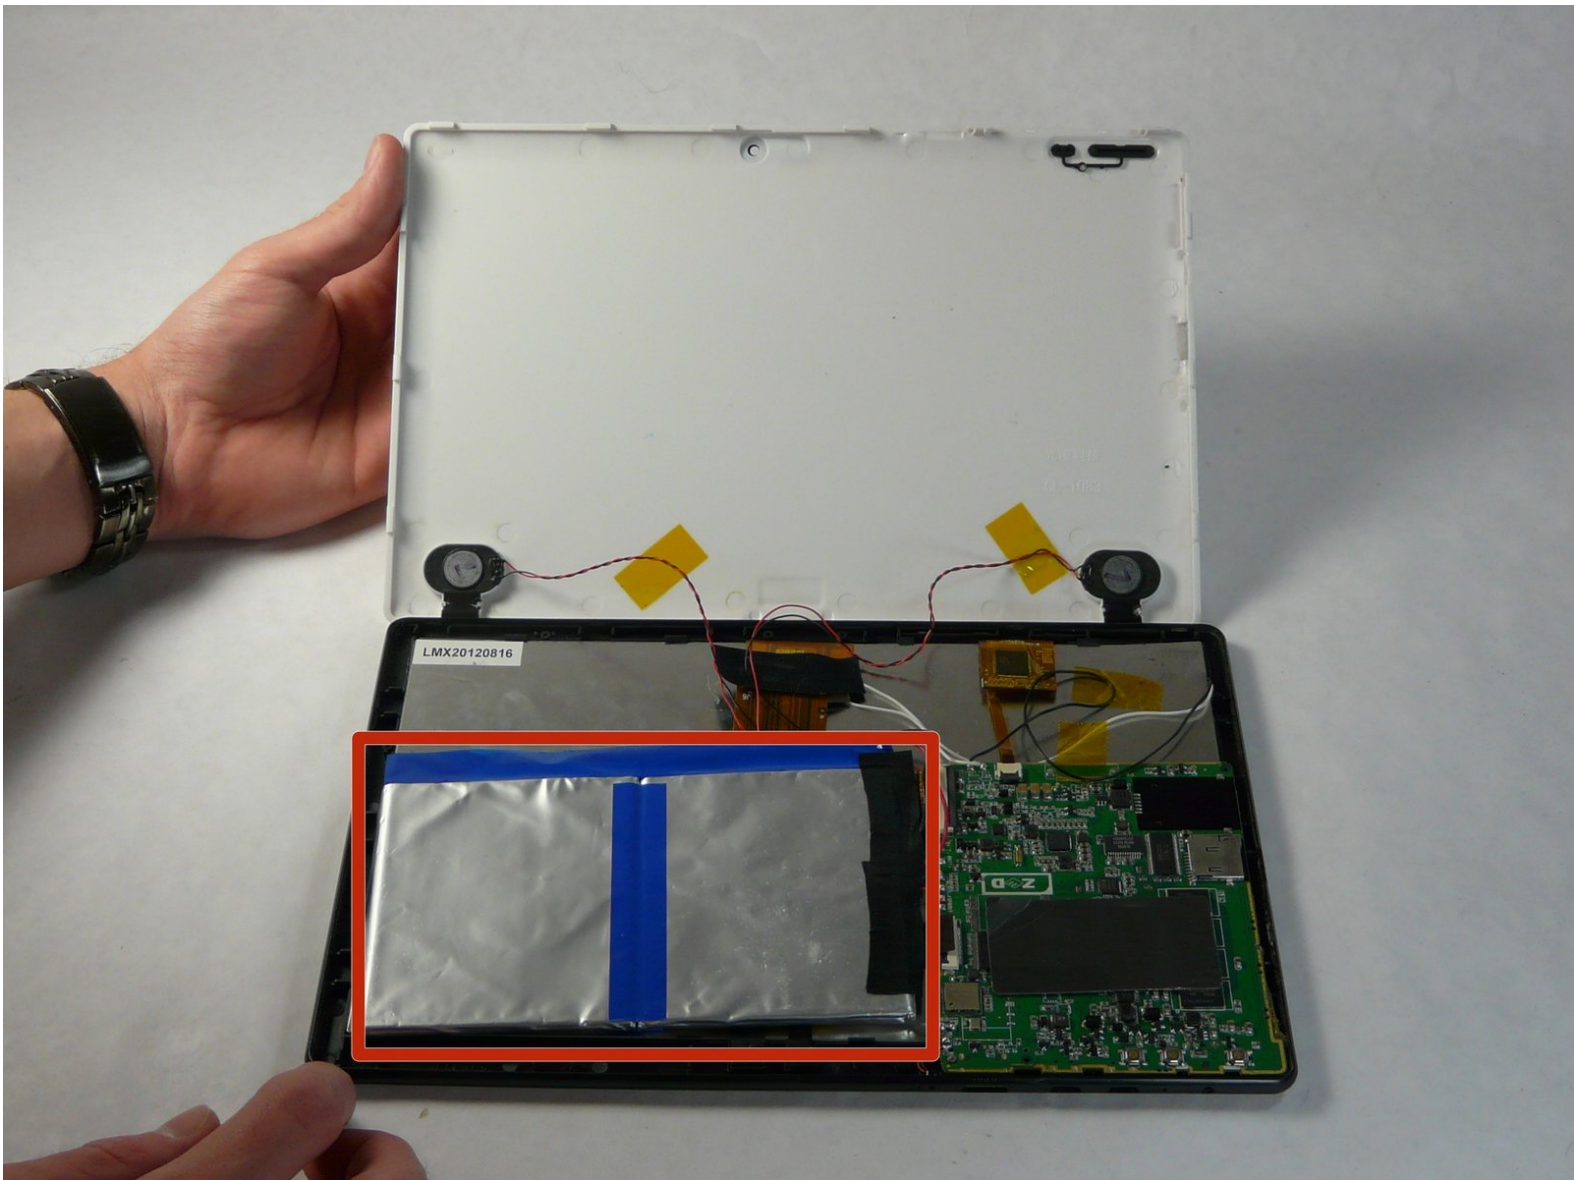

---

## INTRODUCTION


For this project you will need to have the knowledge, and tools necessary to solder. The following link gives instructions on how to solder. [How To Solder and Desolder Connections](#)

---

### TOOLS:


- [Soldering Iron](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Remove Back

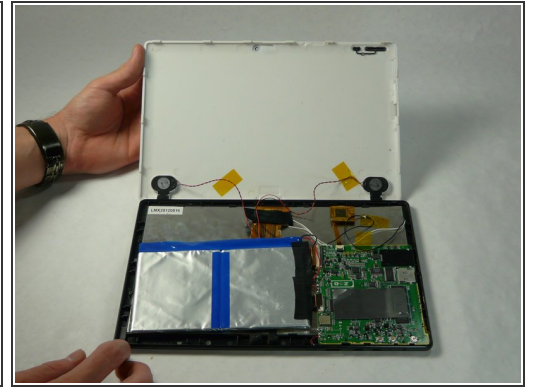

- Take plastic opening tools, and find a spot on the back of tablet to lift the back plate. Once back is lifted enough, remove the back of the tablet carefully with fingers




## Step 2 — Locate Battery

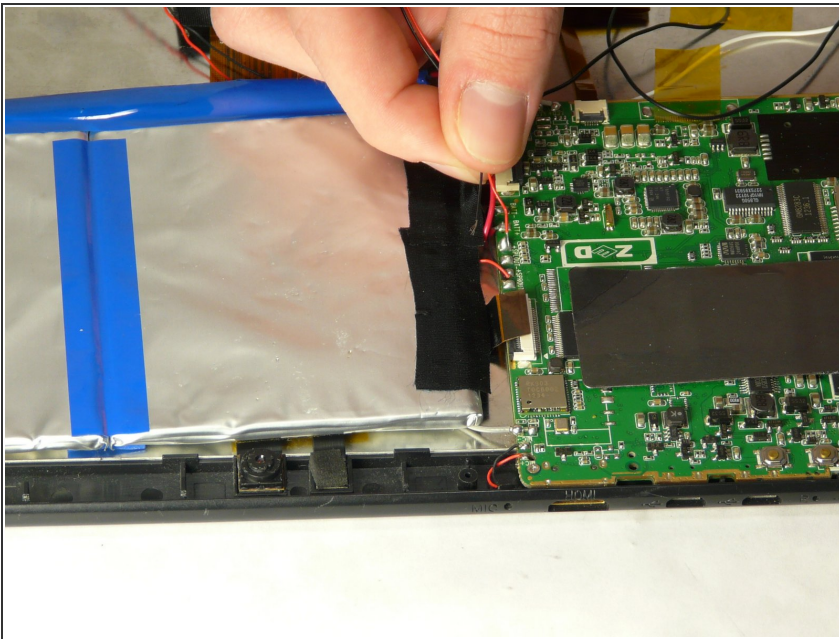

- Locate battery, and examine wires connected to battery.






### Step 3 — Remove Battery

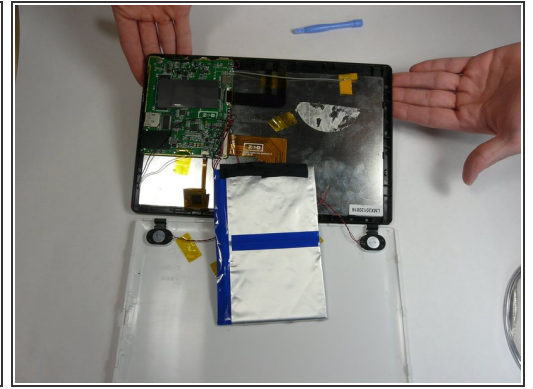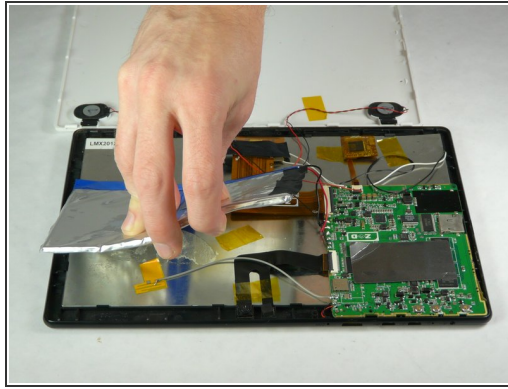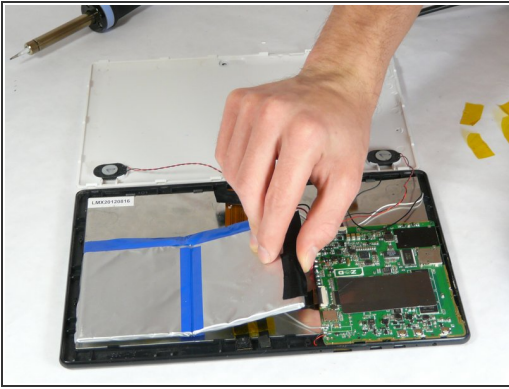

- Carefully remove battery without putting any strain on connected wires. The battery is held to the tablet with adhesive, so be careful not to jerk the battery when it becomes loose.

### Step 4 — Disconnect Wires

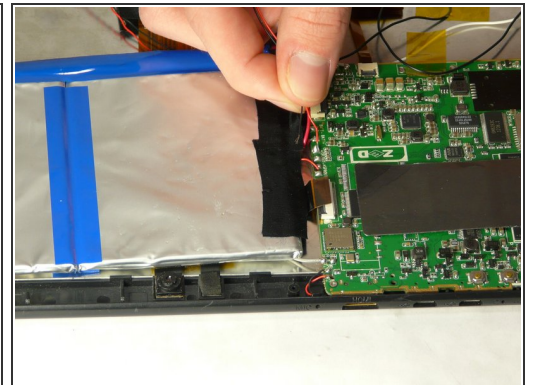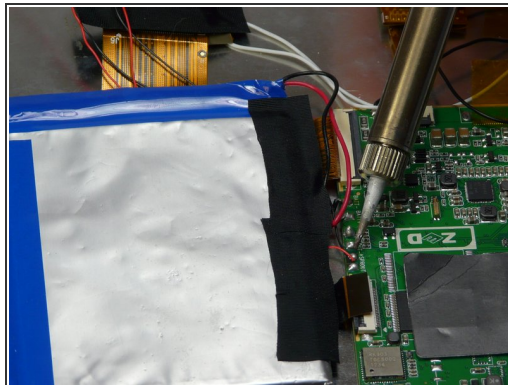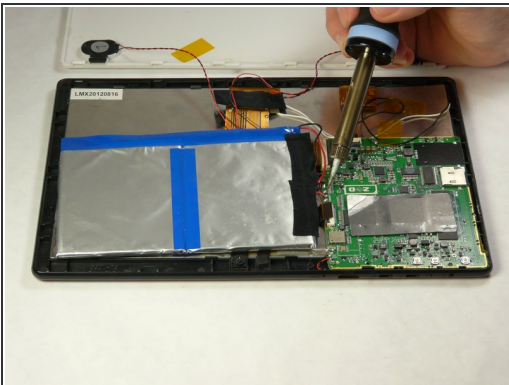

- Use a soldering iron to carefully remove wires from motherboard. Then remove battery.

To reassemble your device, follow these instructions in reverse order.