




Disassembling Galaxy Tab S 10.5 Back Cover

How to remove the back cover of the Galaxy Tab S 10.5.

Written By: Jordan Soto

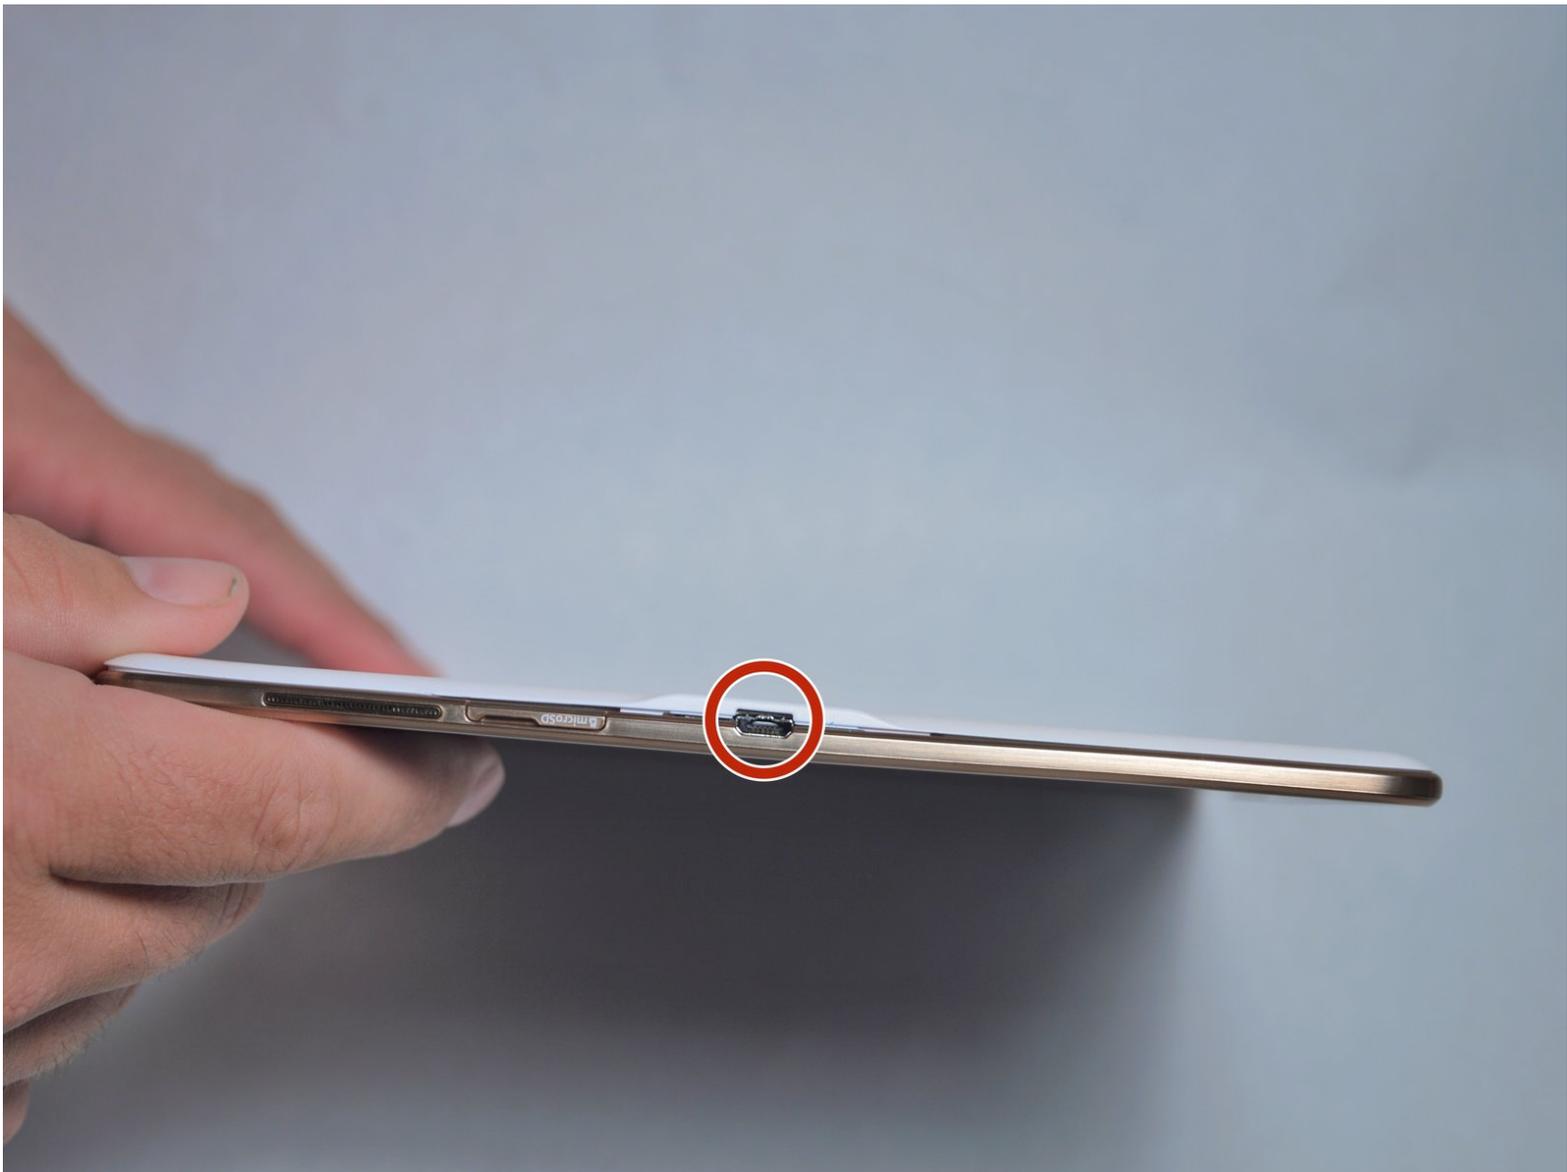



INTRODUCTION

This guide will demonstrate how to remove the back cover of this device. This is a prerequisite step for most internal problems for this device. You will have to remove the back cover before you can reach many components.

TOOLS:

- [iFixit Opening Tools](#) (1)

Step 1 — Disassembling Galaxy Tab S 10.5 Back Cover

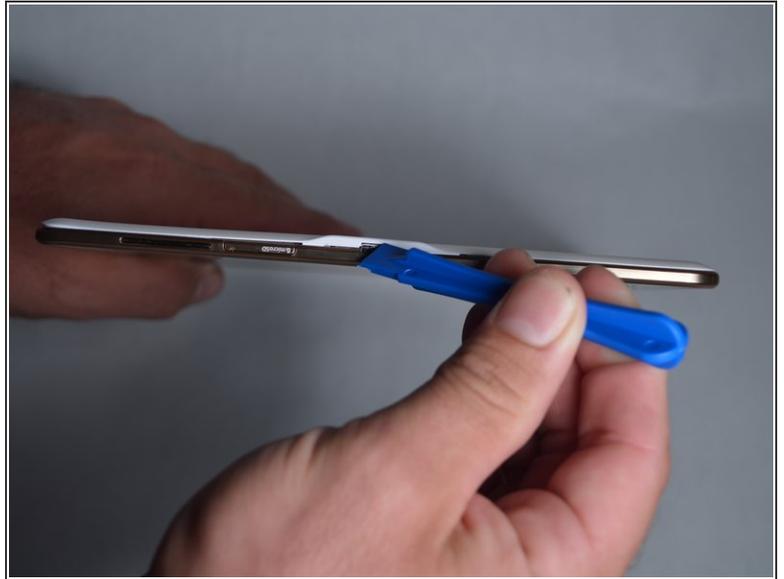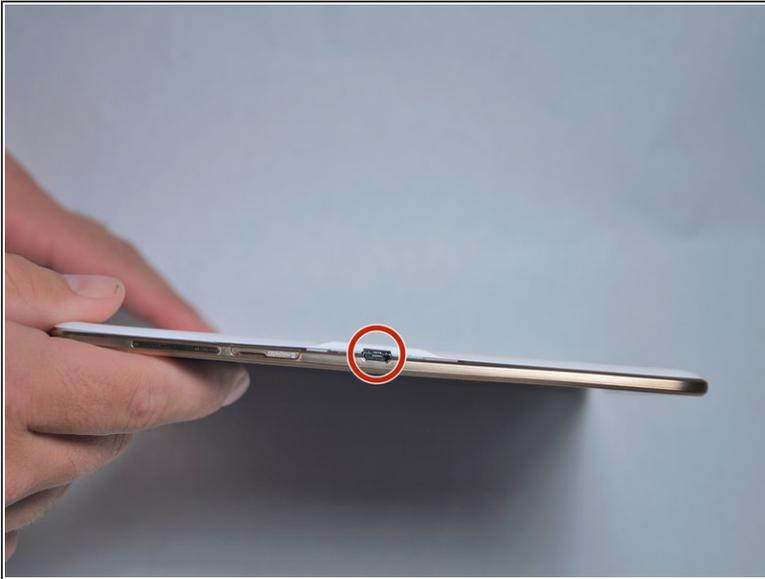


- Place the plastic opening tool into the SD card slot or charge port.
- Try in an upward motion until you see a separation between the tablet and back cover.

Step 2



- Work around the entire device by sliding the plastic opening tool around the rim.
- ⓘ If this is the first time, it will be hard to separate the back cover from the tablet.
- ⓘ The clips are approximately 5 cm apart. While working around the device, the clips will make a dislocating sound when disconnected.

Step 3

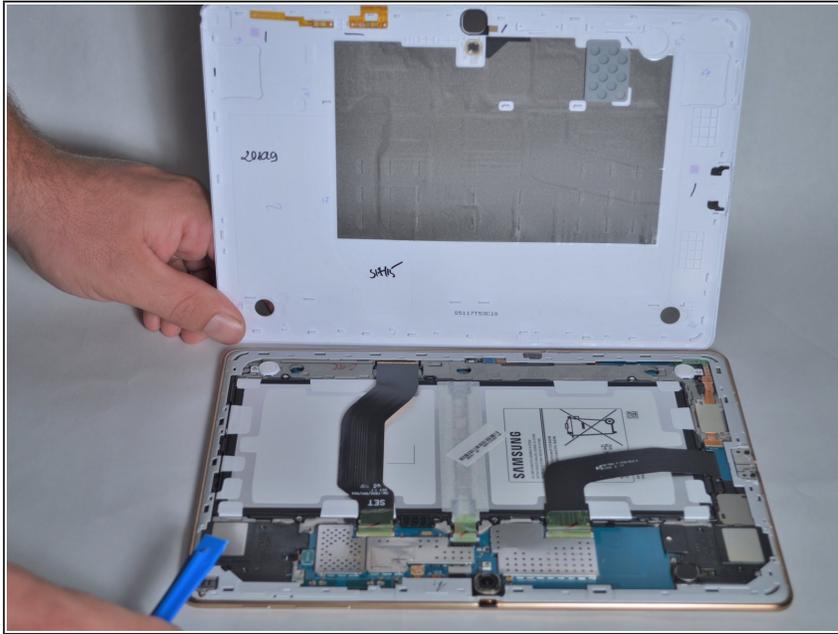

- Remove the back cover once all links have been separated.
- ⚠ Be careful when touching any of the internal components of the tablet.

To reassemble your device, follow these instructions in reverse order.