




Zeki TBQG884B Rear Case Replacement

This guide will assist you in replacing the...

Written By: David Wyman

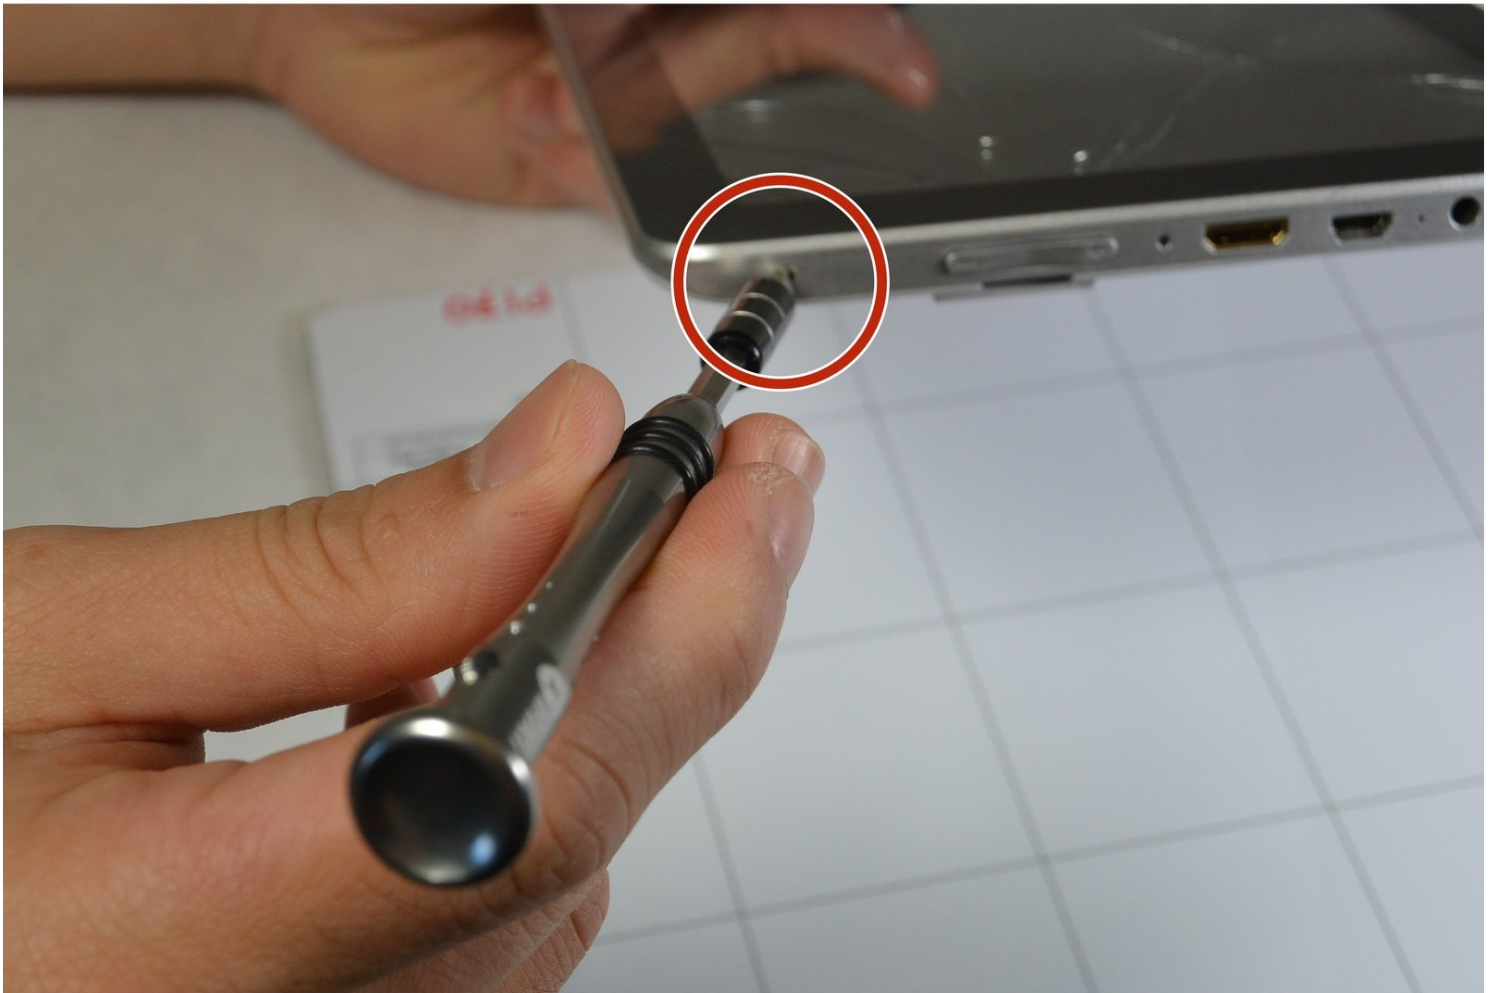

INTRODUCTION

This guide will assist you in replacing the rear cover of your Zeki TBQG884B tablet, or as a prerequisite for repairs on any of the device's other internal components. It is important to remember before beginning this guide that the device is extremely delicate and to complete each step of this guide very carefully.

TOOLS:

Phillips #1 Screwdriver (1)


iFixit Opening Tool (1)

Step 1 — Rear Case



- Remove the two screws from the end of the device where the ports are located using a Phillips #1 screwdriver.

Step 2

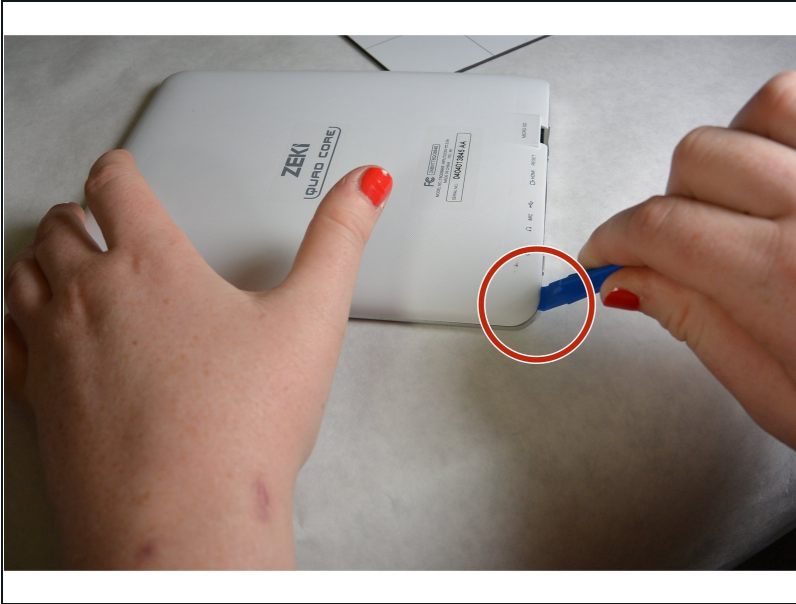

- Place the tablet down so that the screen is facing away from you.
- Insert the tip of your opening tool into the small gap between the gray and white plastic covering. Pry it open and you should hear the clips opening up.
- Gently work your way around the perimeter of the tablet's edge.

Step 3



- Remove the back cover
- Remove any tape on the speaker and detach the speaker from the back plate.
 - ☒ The speaker is connected to the motherboard by two soldered wires. Don't break them when you remove the speaker.

To reassemble your device, follow these instructions in reverse order.

