



# BlackBerry Curve 8520 LCD Screen Replacement

Replace the screen of your BlackBerry Curve 8520.

Written By: Matt



---

## INTRODUCTION

Use this guide to replace the screen of the BlackBerry Curve 8520.



### TOOLS:

- [T6 Torx Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Tweezers](#) (1)
-

## Step 1 — Back Panel



- Insert a plastic opening tool into the small notch on the rear cover of the phone.
- Pry the rear cover up from the phone.

## Step 2 — Battery



- Locate the slit between the top of the battery and the casing.
- Gently apply pressure on the top of the battery to trigger the spring release.



## Step 3 — Keyboard Cover



- Remove the two Torx T6 screws to the left and right of the battery.

## Step 4



- Using hairdryer or heat gun, warm the front panel to soften the adhesive beneath.
- Starting from one side, use a plastic opening tool to pry up the screen cover.
- ⚠ Work carefully to avoid bending the screen cover.
- Once one side is loose, gently peel up the entire cover.


## Step 5



- Insert the plastic opening tool in the seam along the side of the device.
- Slide the tool along the length of the seam, applying moderate force with the plastic opening tool.
- Carefully remove the faceplate.




## Step 6

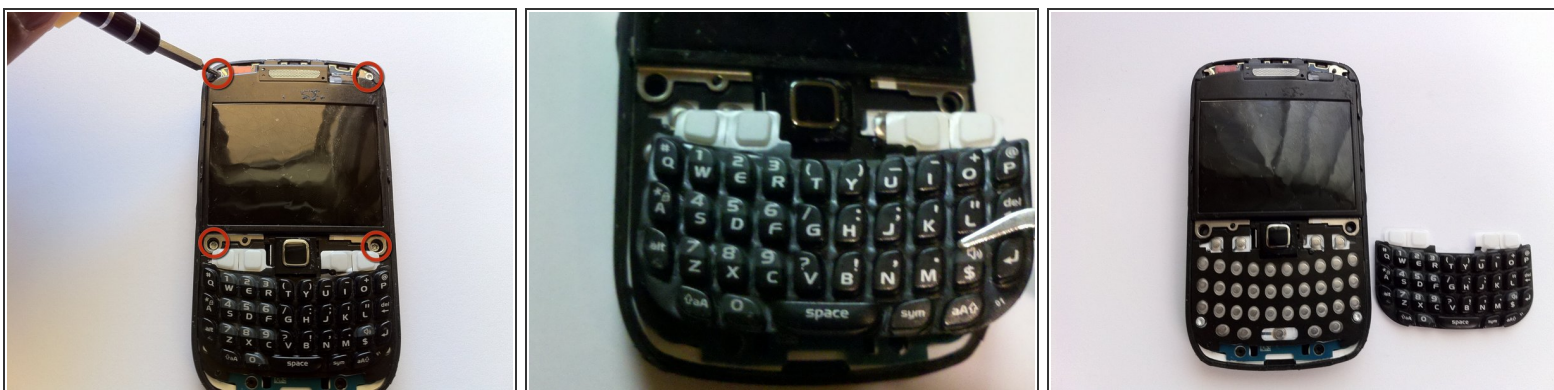



- Remove four T6 Torx screws from the front of the phone.
- Using tweezers, remove the keyboard buttons from the phone.

## Step 7 — Motherboard

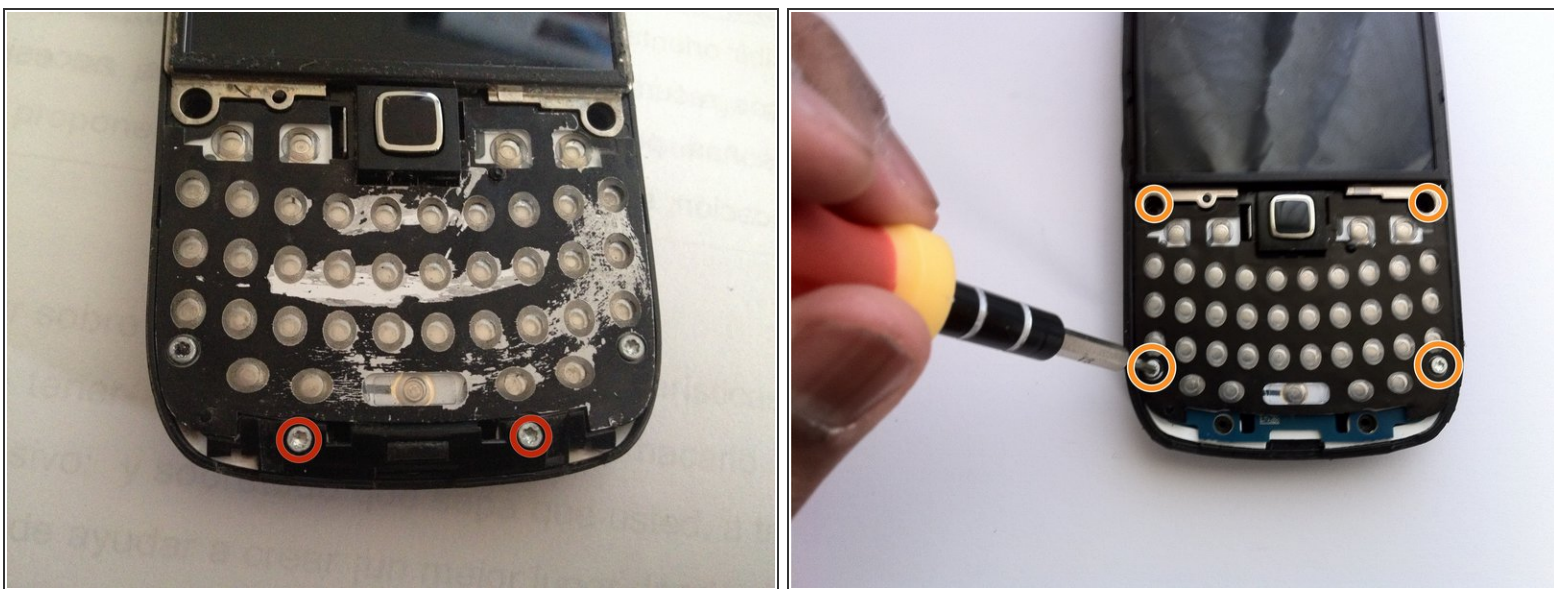

- Remove the two T6 Torx screws securing the small plastic bracket at the bottom of the phone.
- Remove the four T6 Torx screws from the corners of the keyboard.

## Step 8

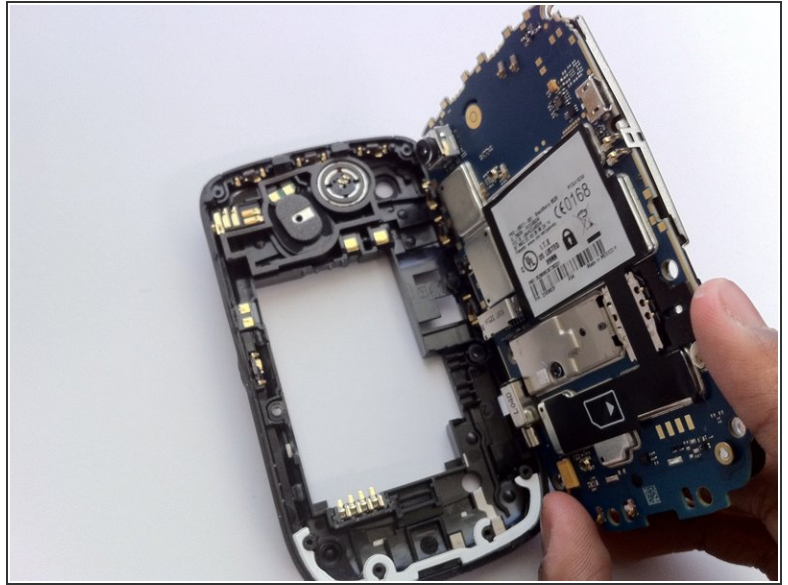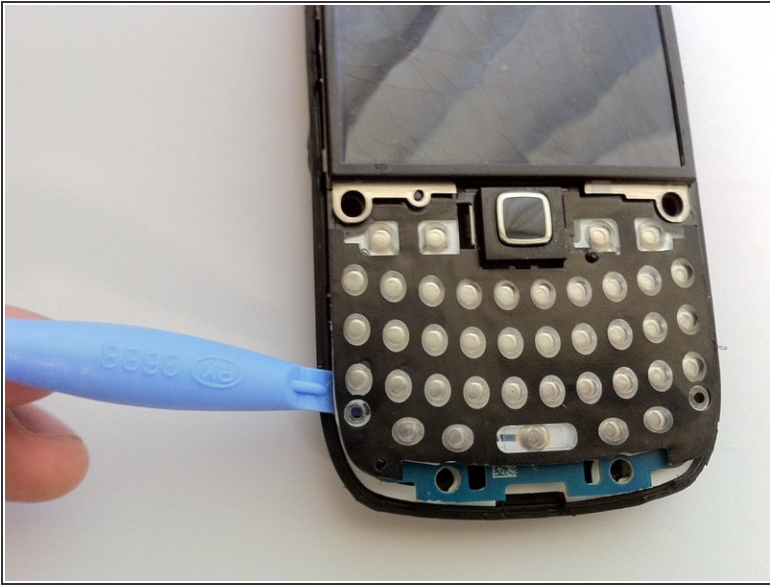

- Using a plastic opening tool, gently pry the motherboard assembly from the device's frame.

To reassemble your device, follow these instructions in reverse order.