



# Samsung Jack Antenna Replacement

Installing the Samsung Jack's Antenna.

Written By: Paul Piller



---

# INTRODUCTION

Use this guide to install a new speaker.



## TOOLS:

- [Phillips #00 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
  - [Spudger](#) (1)
-

## Step 1 — Battery



- Slide the battery cover downwards with pressure focused on the center of the cover.
- Lift the cover off of the phone.


## Step 2



- Grasp the bottom left and right corners of the battery and lift it from its housing.



## Step 3 — Rear Case

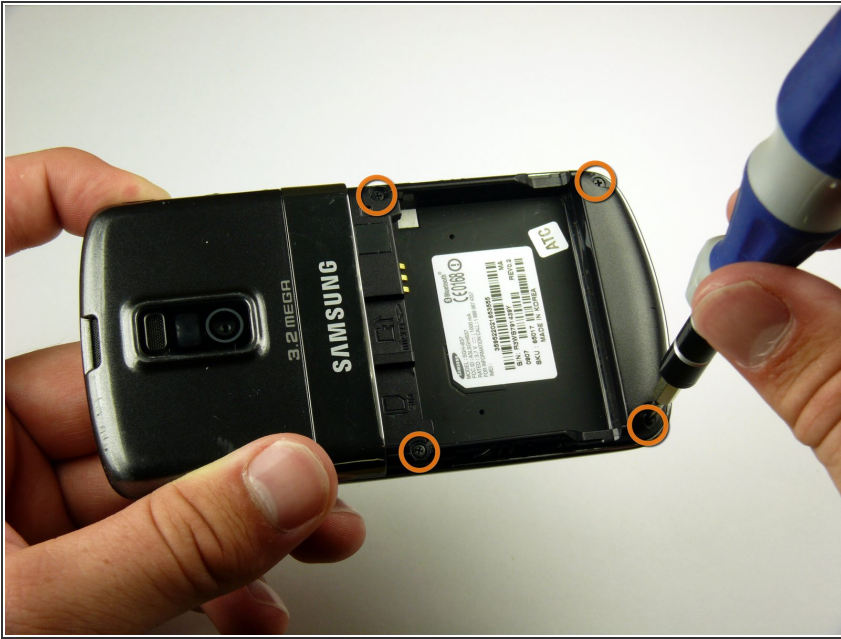

- Remove the four black 7.30 mm screws surrounding the battery housing using a Phillips #00 Screwdriver.

## Step 4



- i** The rear case is firmly attached to the phone with clips. Do not be afraid to use a little extra force.
- Insert the Plastic Opening Tool in between the front and rear cases.
  - Pry with the Plastic Opening Tool around all edges of the phone until you free all the clips.

## Step 5




- Lift the rear case off of the phone.


## Step 6 — Antenna



- Remove the two silver 4.30 mm screws on either side of the antenna using a Phillip's #00 Screwdriver.

## Step 7

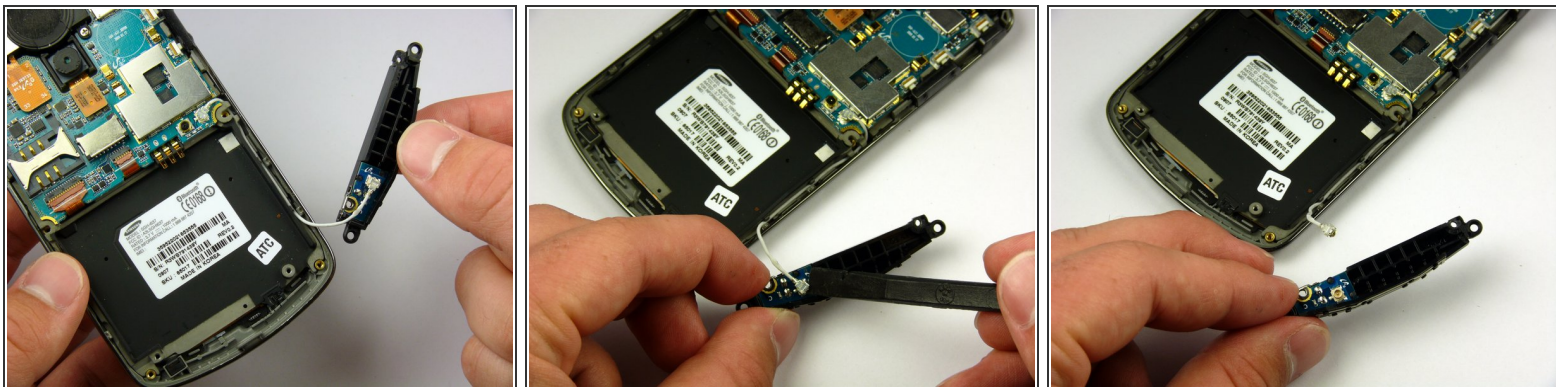

 There is a wire under the antenna connecting it to the Motherboard. Do not pull off the antenna just yet.

- Use a spudger to remove the wire connector under the antenna.

To reassemble your device, follow these instructions in reverse order.