

Samsung Eternity Antenna/Speaker Replacement

You will need to find a clean area to work in...

Written By: Matthew Kidd




INTRODUCTION

You will need to find a clean area to work in and have the necessary tools. Follow this guide to gain access to your cellphone's antenna/speaker module.

TOOLS:

```
Phillips #00 Screwdriver (1)
Spudger (1)
Tweezers (1)
```

Step 1 — Back Case




• Remove the back battery cover.




• Using the Phillips #00 screwdriver, remove the phone's battery.

Step 3

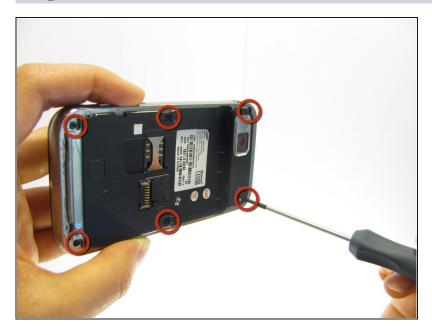

Remove six (4.28 x 1.25)mm screws using the Phillips #00 screwdriver

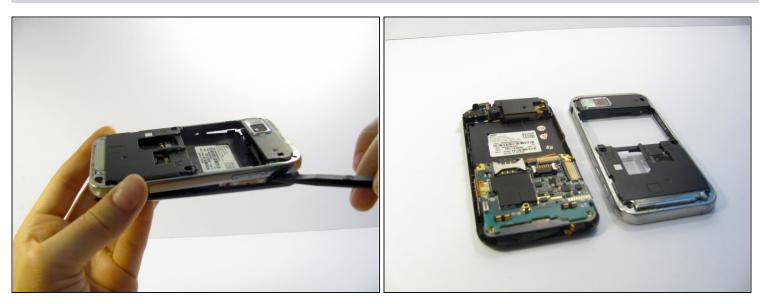


• Continuing to use the Phillips #00 screwdriver, gently pry the silver plastic back plate from the body of the phone.

Step 5 — Antenna/Speaker




 Pop the antenna plug off of its socket with a pair of metal <u>tweezers</u>.

Step 4

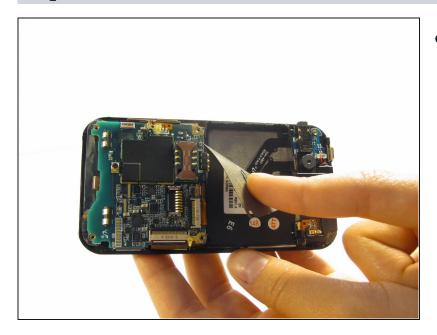


• Peel off the Identification sticker.

Step 7

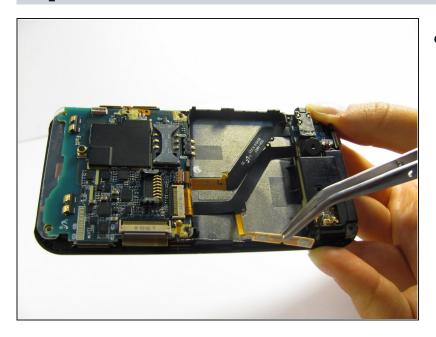


• Peel the button sensor on the side of the motherboard off of the case.

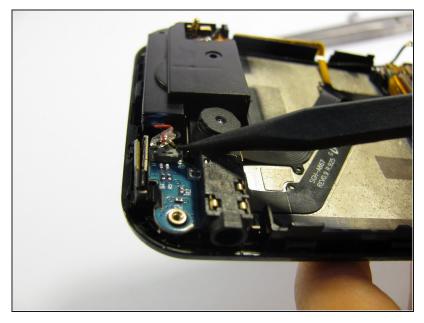

• Pop the speaker plug out of its socket.

Step 9

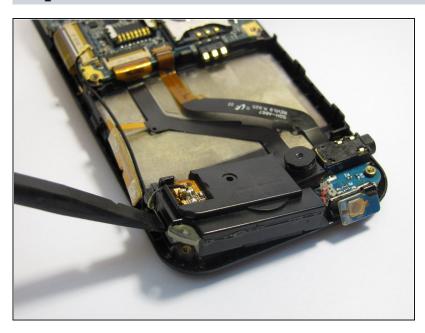

 Pry the antennae/speaker component out of its casing. You need to use a little force to get the piece to pop out.



• You will now be able to replace the antenna/speaker module.

To reassemble your device, follow these instructions in reverse order.