




Dell Inspiron 11-3162 Wireless WLAN Card Replacement

In this guide you will be able to replace you wireless card.

Written By: Dominic DeLong

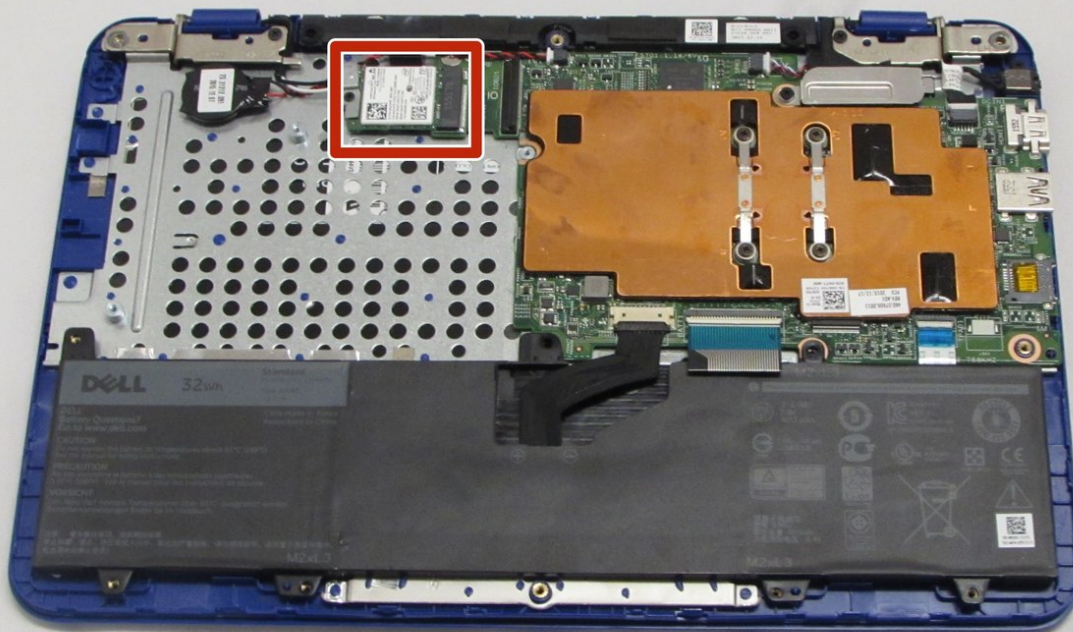

INTRODUCTION


If you clicked this link from the troubleshooting guide, follow these steps to help get your wireless back up and running.



TOOLS:

- [64 Bit Driver Kit](#) (1)
 - [Tweezers](#) (1)
 - [Heavy-Duty Spudger](#) (1)
 - [Phillips #000 Screwdriver](#) (1)
 - [Phillips #00 Screwdriver](#) (1)
-

Step 1 — Back Cover Removal

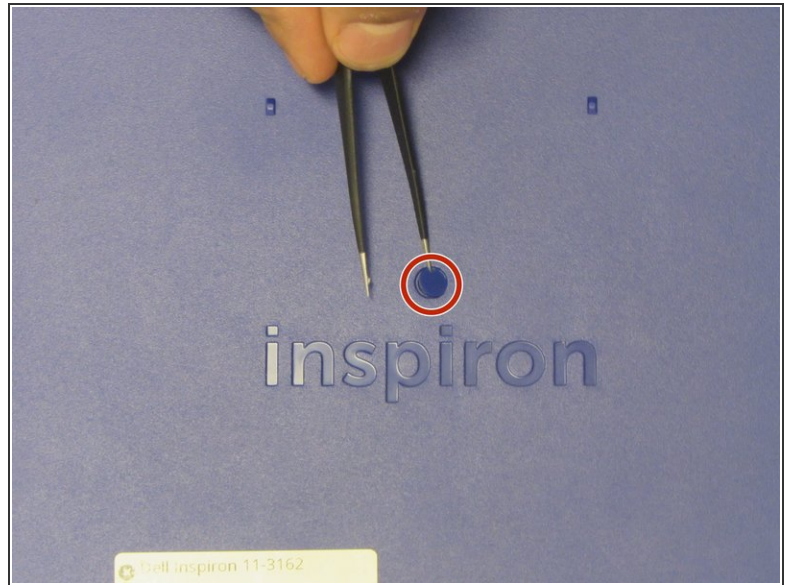

i Before you begin, be sure to turn off your laptop and unplug it from the outlet.

- Use tweezers to pry and remove the center screw cover on the back cover.

Step 2






- Use a Phillips screwdriver to unscrew the nine 6.8 mm screws securing the back cover.

Step 3





- Use a spudger to pry around the base edges of the back cover to loosen it from the laptop.
- ⚠ Do not fully remove the cover, as it is still attached to the laptop with cables.

Step 4

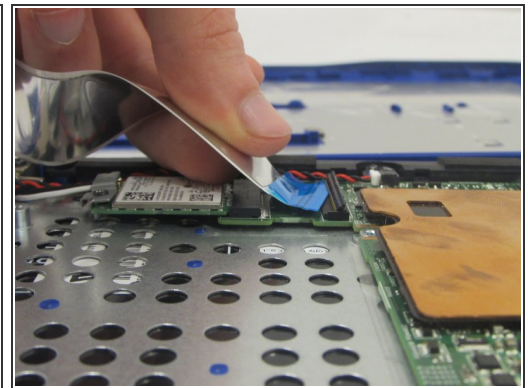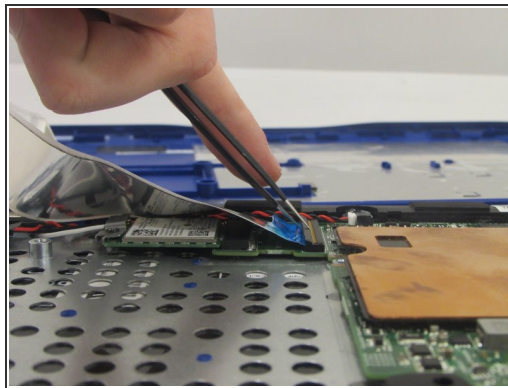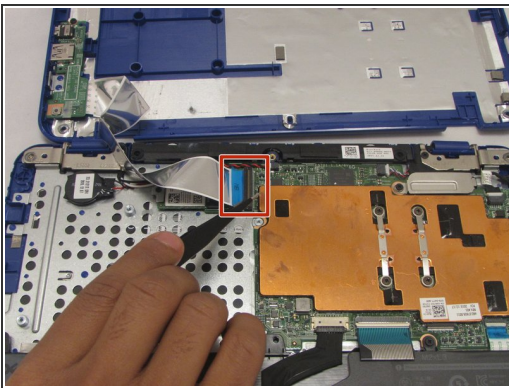




- ⓘ If you are only replacing the battery, you can skip this step. Be careful not to strain the still-connected cable as you work.
- Unlock the wide ZIF connector securing the flex cable.
- ⓘ To unlock a [ZIF connector](#), use the tip of a spudger or your fingernail to flip up the small, hinged locking flap.
- Pull the ribbon cable outwards to disconnect the back cover from the motherboard.

Step 5 — Battery

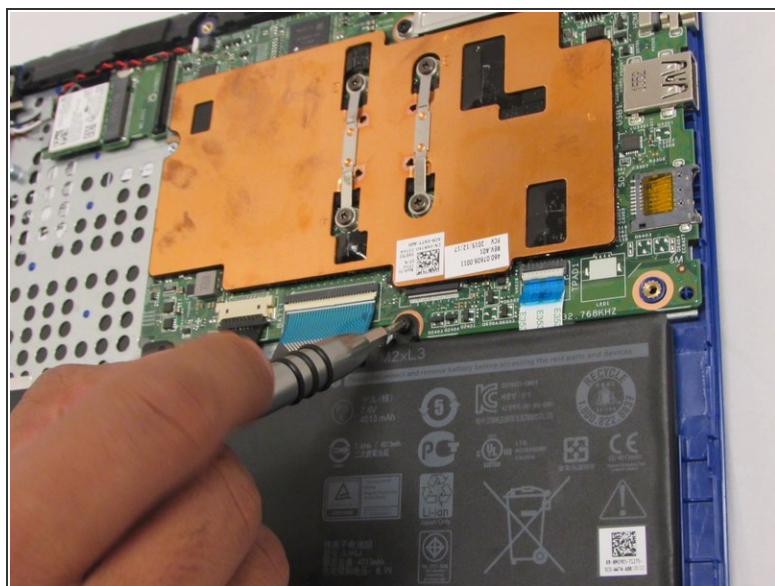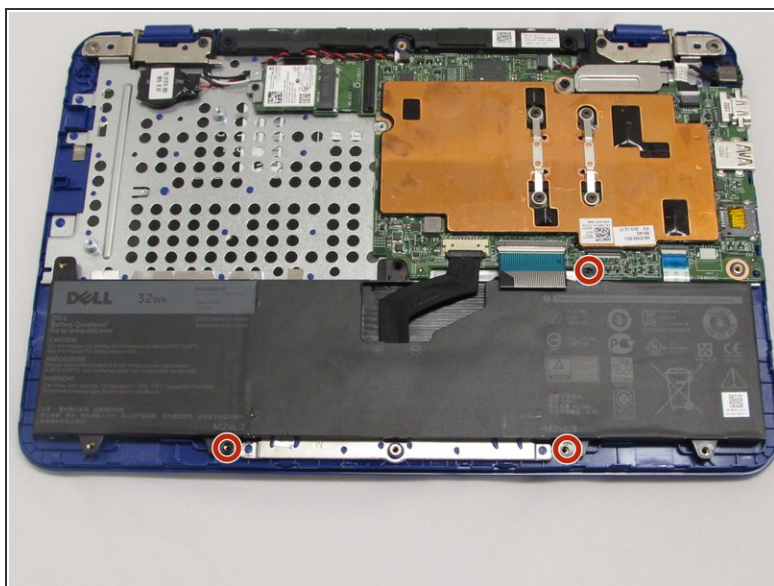



- Use a Phillips screwdriver to unscrew the three 4 mm screws securing the battery.

Step 6

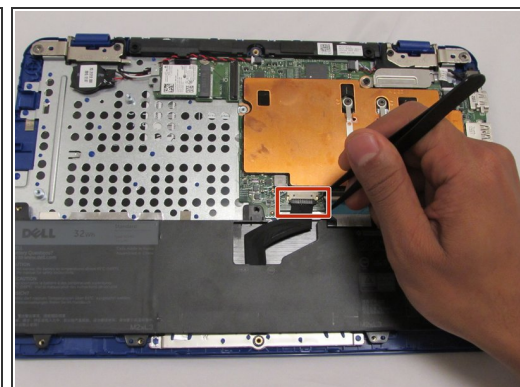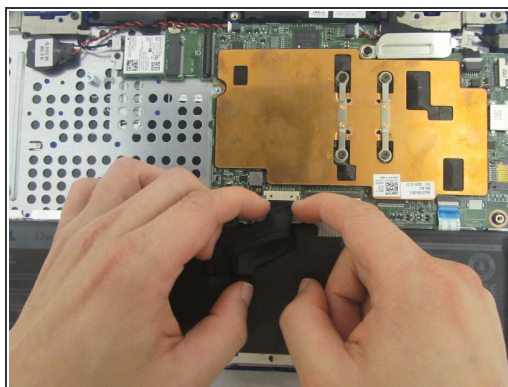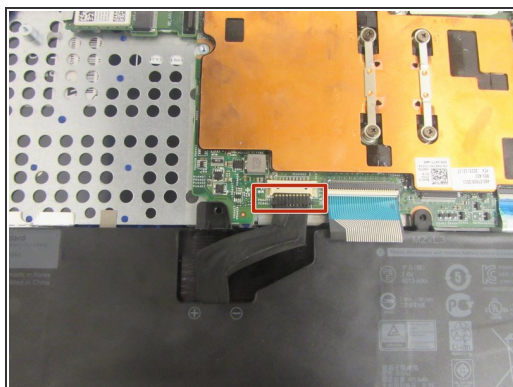



- Use your fingers (or a set of tweezers) to disconnect the battery cable from the motherboard by gently pulling it towards the battery.
 - ⚠ Pull parallel to the battery, not straight up.
- Lift and remove the battery from its recess.

Step 7 — Wireless WLAN Card

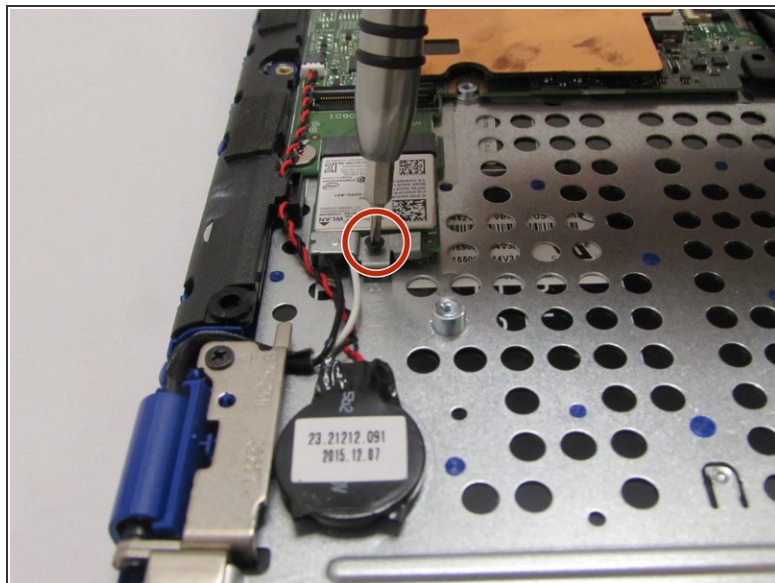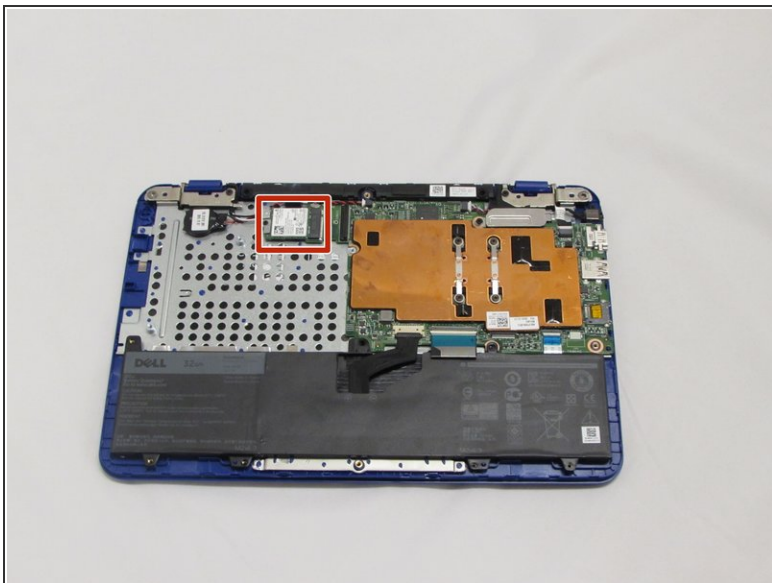


- Use the phillips screwdriver with the PH000 head to unscrew the 3.8mm screw.

Step 8

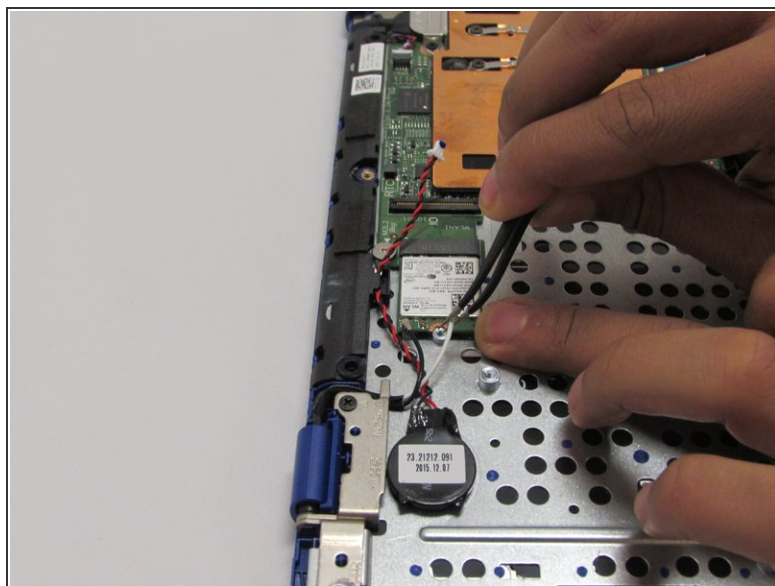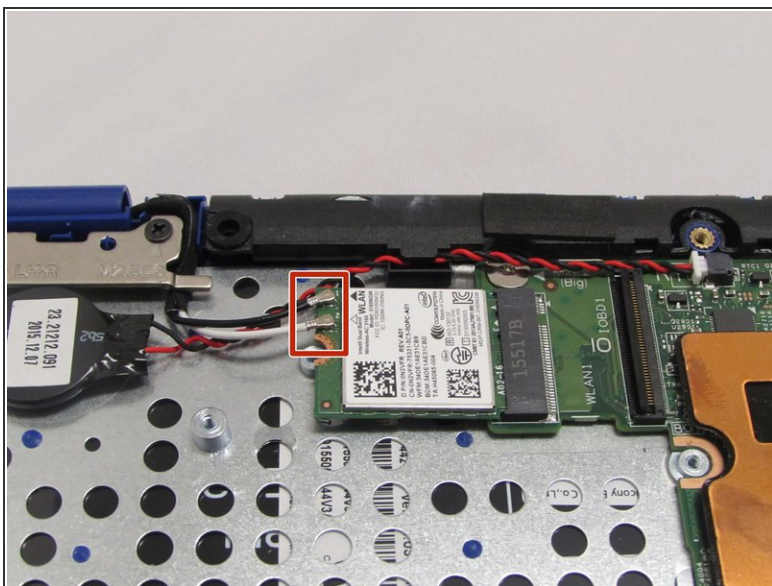

- Using the tweezers, pull the white and black wires off of the WiFi Chip.

Step 9

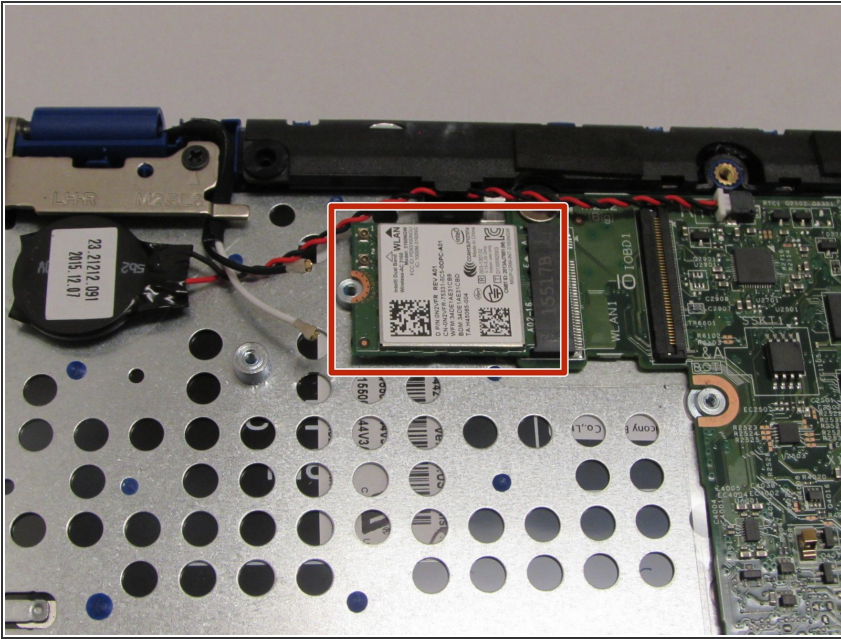

- Pull out the WiFi Chip.

To reassemble your device, follow these instructions in reverse order.