


Sony Vaio VGN-TXN25N RAM Replacement

Written By: Derek Nollsch



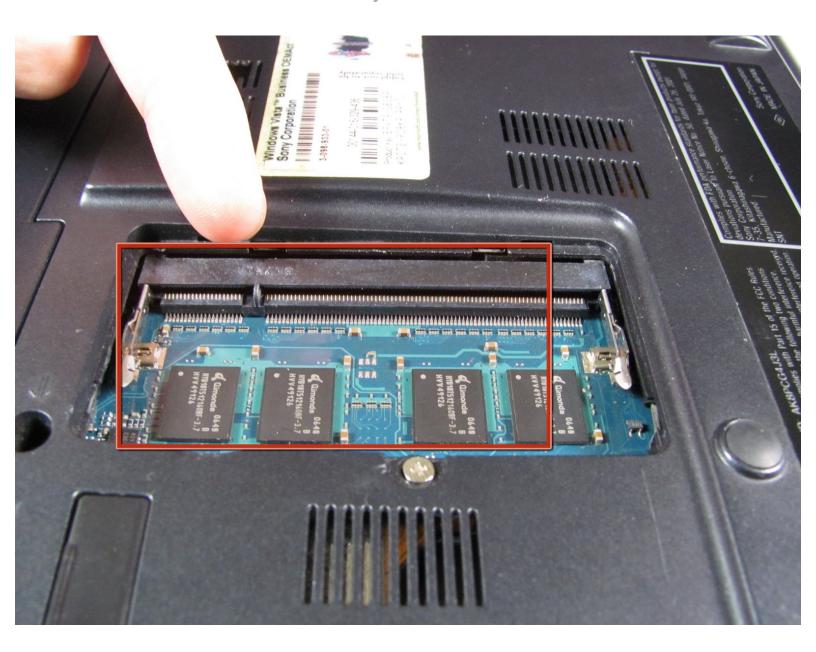

• Phillips #00 Screwdriver (1)



• PC2-4200 512 MB RAM Chip (1)

Step 1 — RAM





- Locate the indicated cover on the back of the laptop (cover not shown in picture)
- Unscrew the small screw shown using a #00 Phillips Head Screwdriver, and remove the cover.

Step 2



- Remove the installed RAM by grabbing the end and forcefully removing from the slot shown (RAM not shown in picture)
- Insert new PC2-4200 RAM making sure to line up notch and inserting RAM until you hear an audible 'click'

To reassemble your device, follow these instructions in reverse order.