




# How to clean the CONDOR L130I3E fan

Clean the CONDOR L130I3E CPU fan !

Written By: AMOUR nasreddine

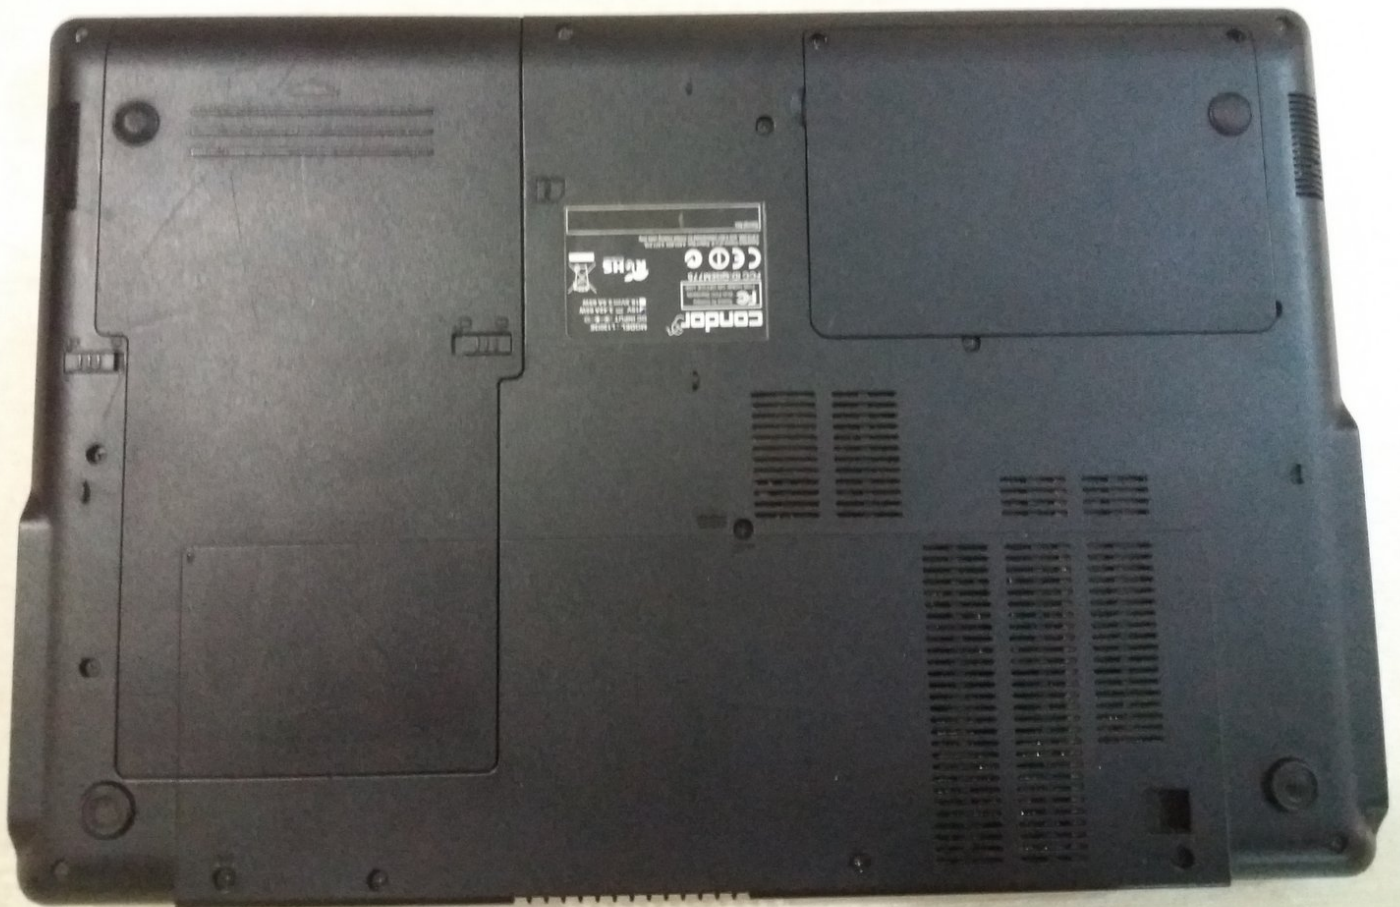

## INTRODUCTION

In this lesson we will discuss how to disassemble this computer and clean its cooling fan from dust and sediment.

## Step 1 — How to clean the CONDOR L130I3E fan



- First of all, make sure your device is switched off and unplugged.
- Remove the battery by pulling the two screws in the direction indicated by the pins.
- Pull the battery up.

## Step 2



- To remove the hard drive, unplug its screws in this cover.
- Pull the hard drive in the direction indicated to remove it.
- Then we remove the hard drive from its place with ease.



## Step 3



- To access the motherboard, you must first remove the keyboard because underneath it screws should be removed to separate the base of the chassis from the top of the keyboard.
- With a flat screwdriver we remove the keyboard by pressing the red-pointed component and pushing the keyboard up to release it.

## Step 4



- Remove the keyboard connector from the motherboard
- Keyboard is now removed successfully

## Step 5



- Remove the top cover and remove the processor cooling fan.
- Unscrew the screws indicated in red to remove the cooling fan.
- Remove the fan.

## Step 6



- We now clean and remove the dust and sediments that hinder fan function and increase processor heat.

To reassemble your device, follow these instructions in reverse order.