


# Dell Vostro 3750 Memory Module Replacement

Written By: Johnathan Hammond

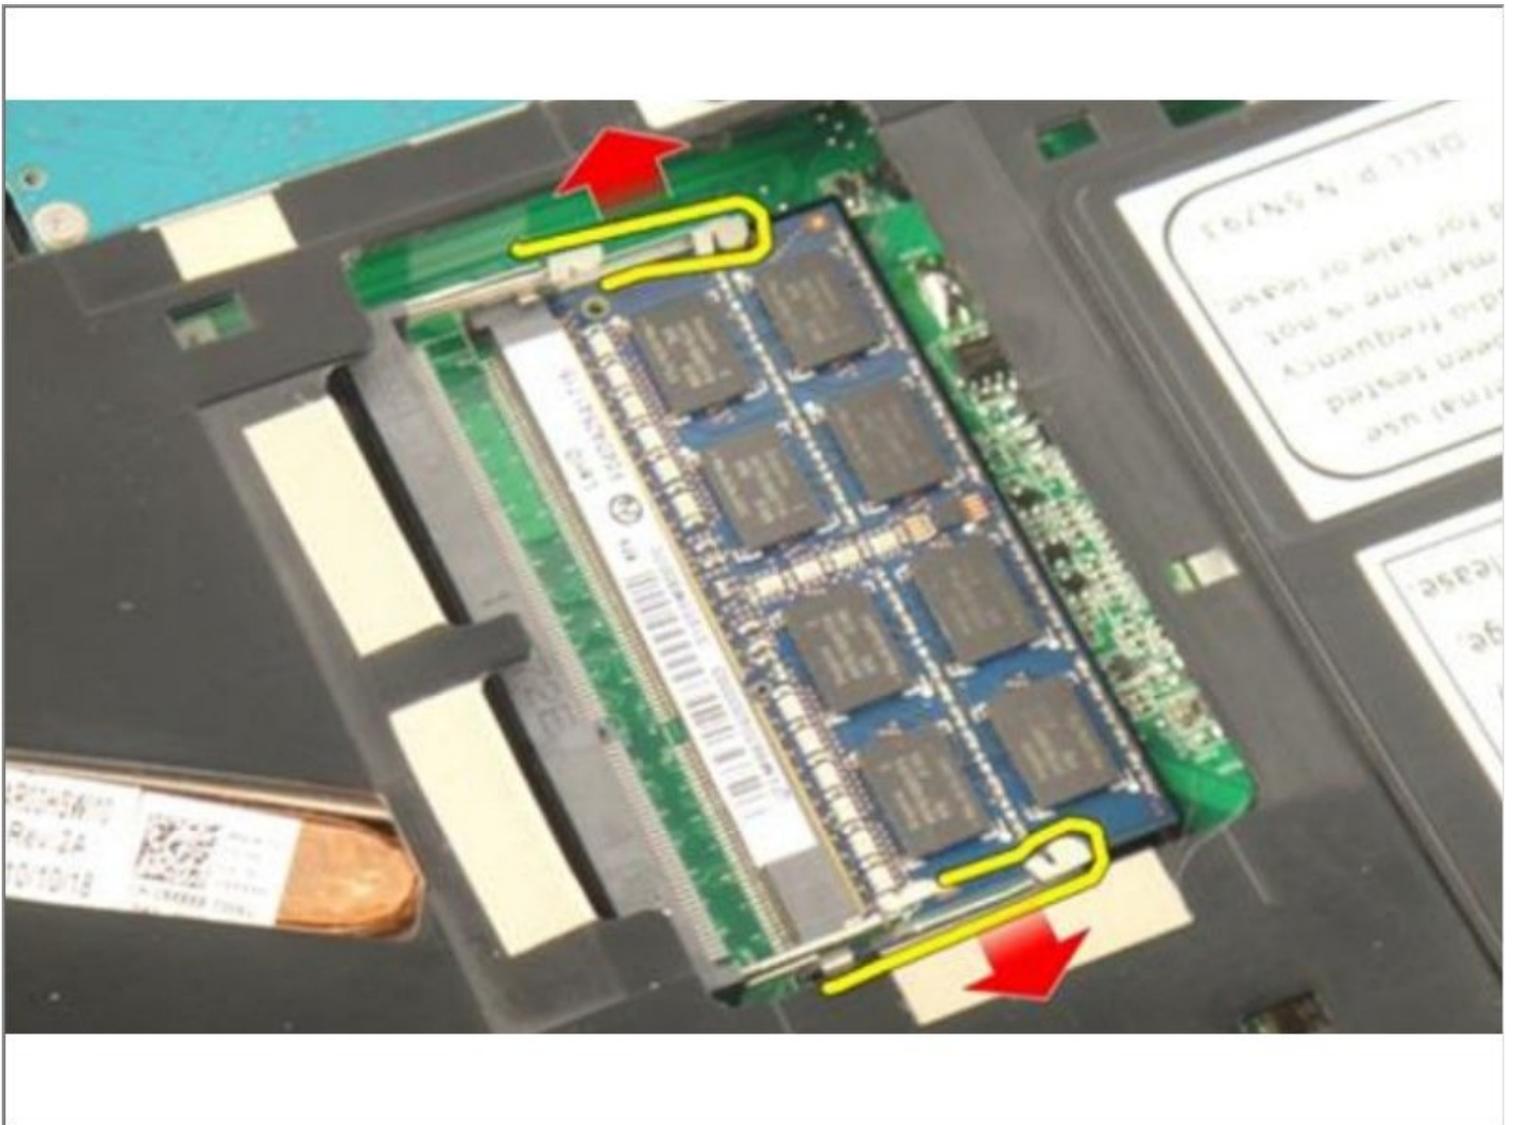

 **TOOLS:**


Phillips #0 Screwdriver (1)

### Step 1 — Unlocking the Battery



- Slide the release latches to unlock the battery.

### Step 2 — Removing the Battery

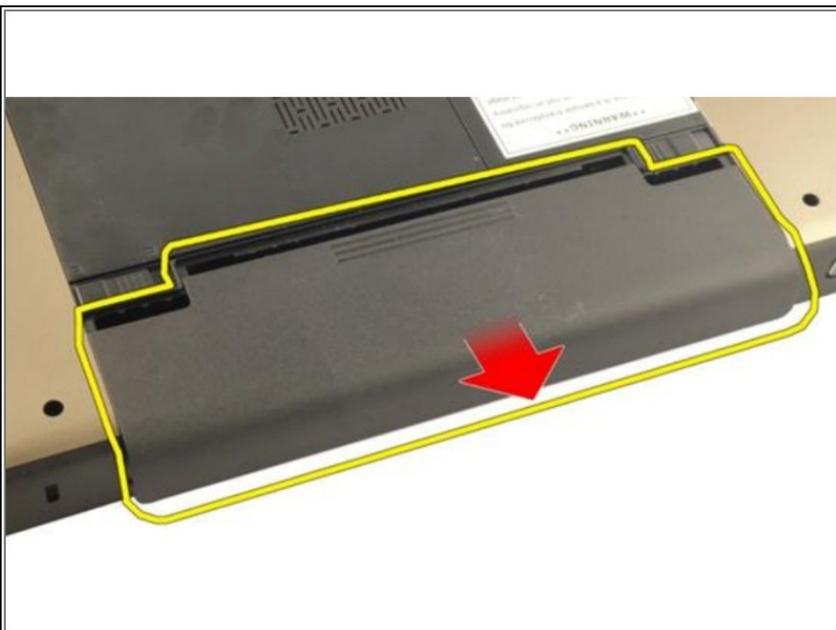

- Slide the battery out of the chassis and remove it from the computer.
- ☑ If this is all you are doing Follow Step In Reverse if not Go to Next Step.

### Step 3 — Loosen the Screws




- Loosen the screws that secure the memory door.

### Step 4 — Removing the Memory Door




- Pry up the memory door near the screw hole, lift, and remove it
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

## Step 5 — Popping up the Memory Module

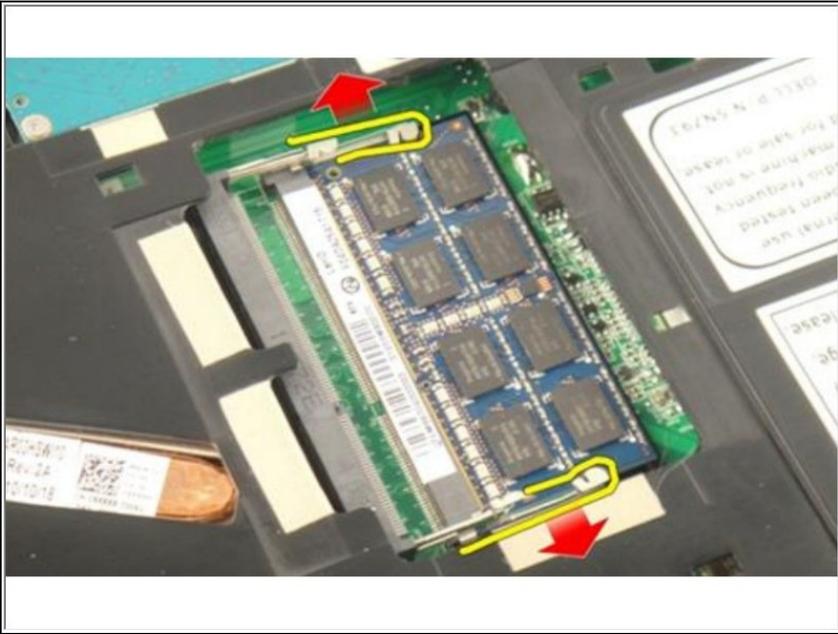

- Pry the retention clips away from the memory module until it pops up.

## Step 6 — Removing the Memory Module

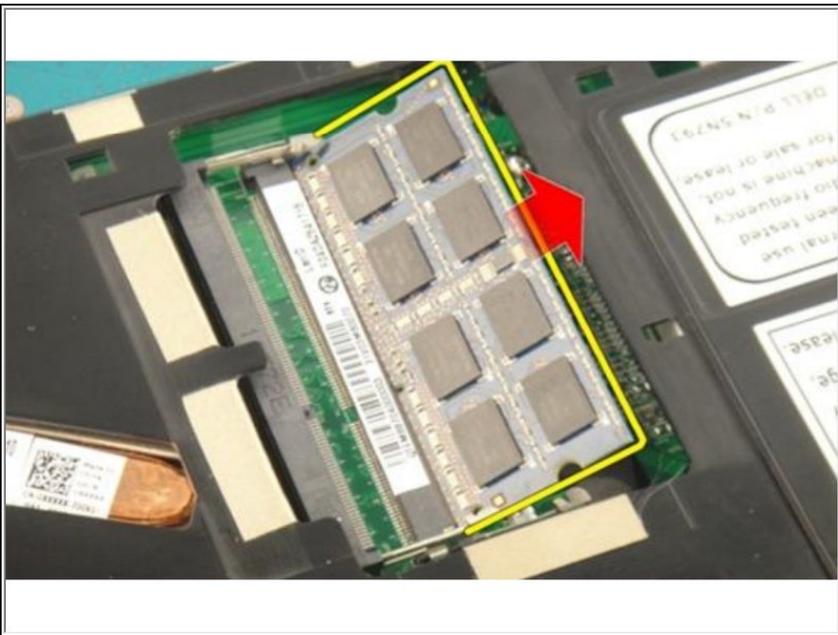

- Remove the memory module from its connector on the system board.
- If this is all you are doing Follow Step In Reverse if not Go to Next Step.

To reassemble your device, follow these instructions in reverse order.