




Dell Studio 1535 Memory Module Replacement


Written By: Johnathan Hammond

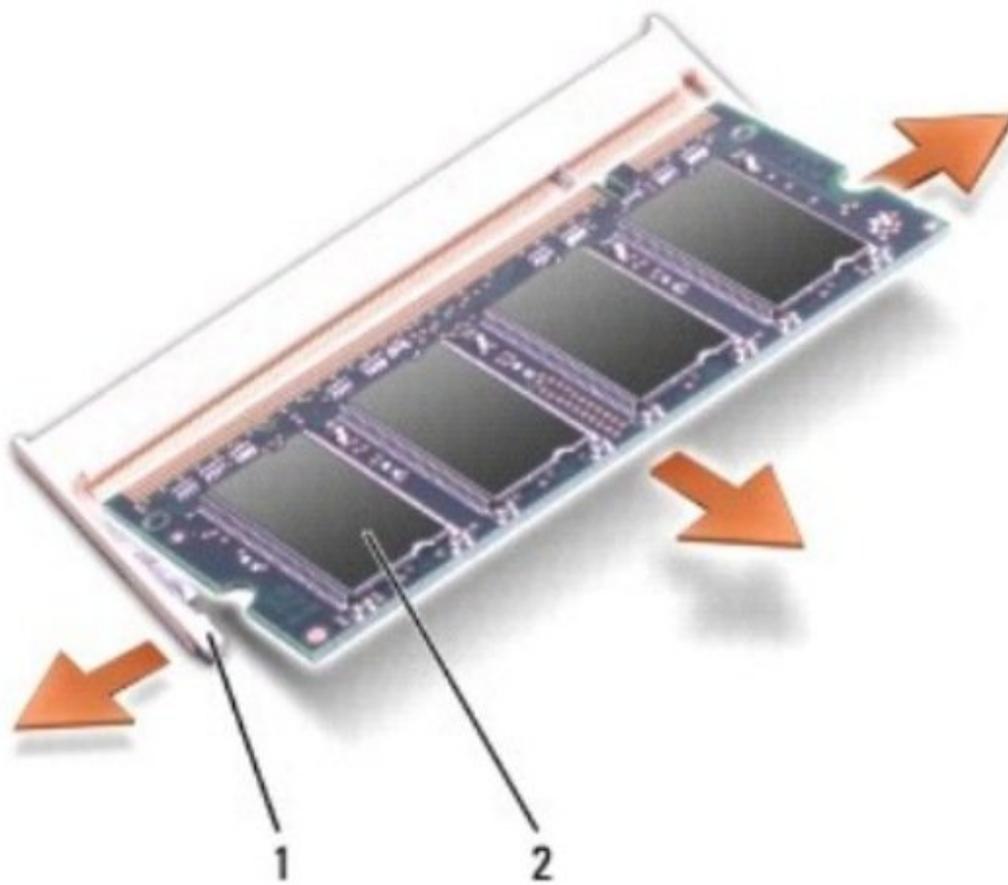

TOOLS:


- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Battery

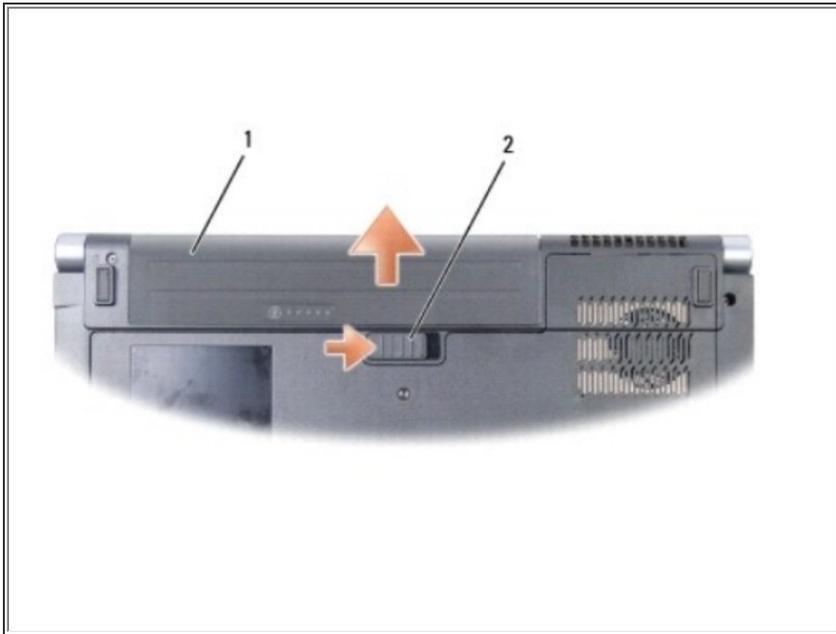


- Slide the battery release latch until it clicks into place.
- Turn the computer top side up, open the display, and press the power button to ground the system board.

Step 2 — Base Cover

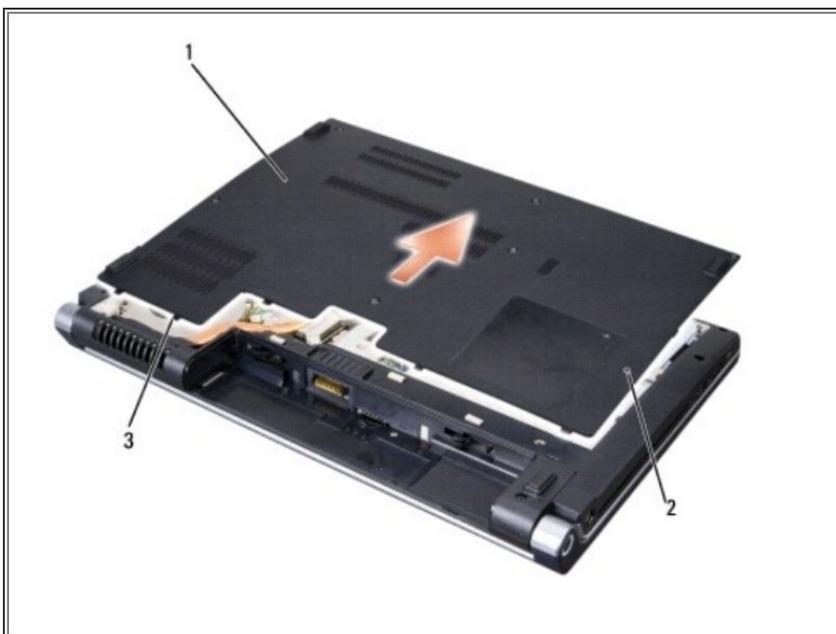

- Turn the computer top side up, open the display, and press the power button to ground the system board.

Step 3 — Memory Module

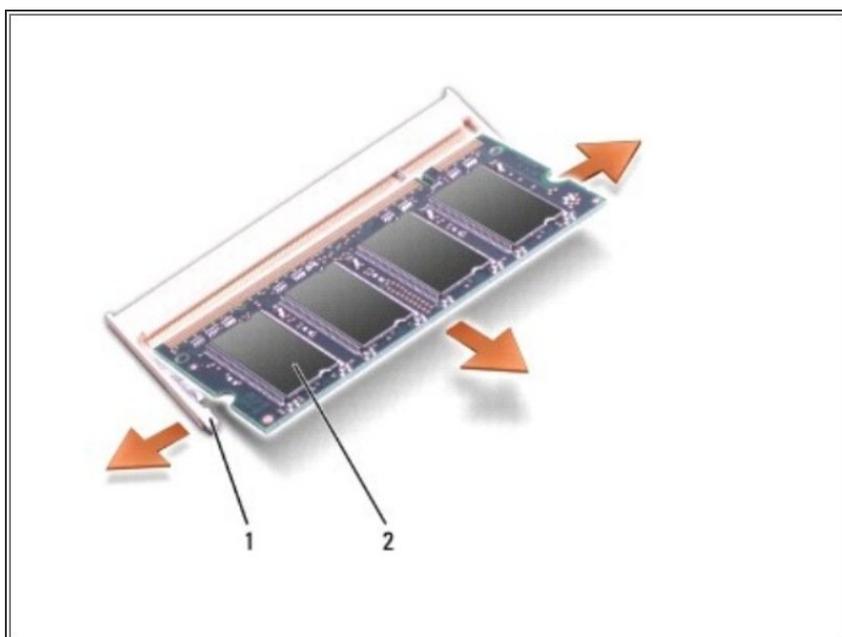

- Use your fingertips to carefully spread apart the securing clips on each end of the memory module connector until the module pops up.
- Remove the module from the connector.

To reassemble your device, follow these instructions in reverse order.