




DigiTech RP70 Motherboard Replacement

This replacement guide will help you swap out the RP70's motherboard with a new/used one.

Written By: Elijah Smith

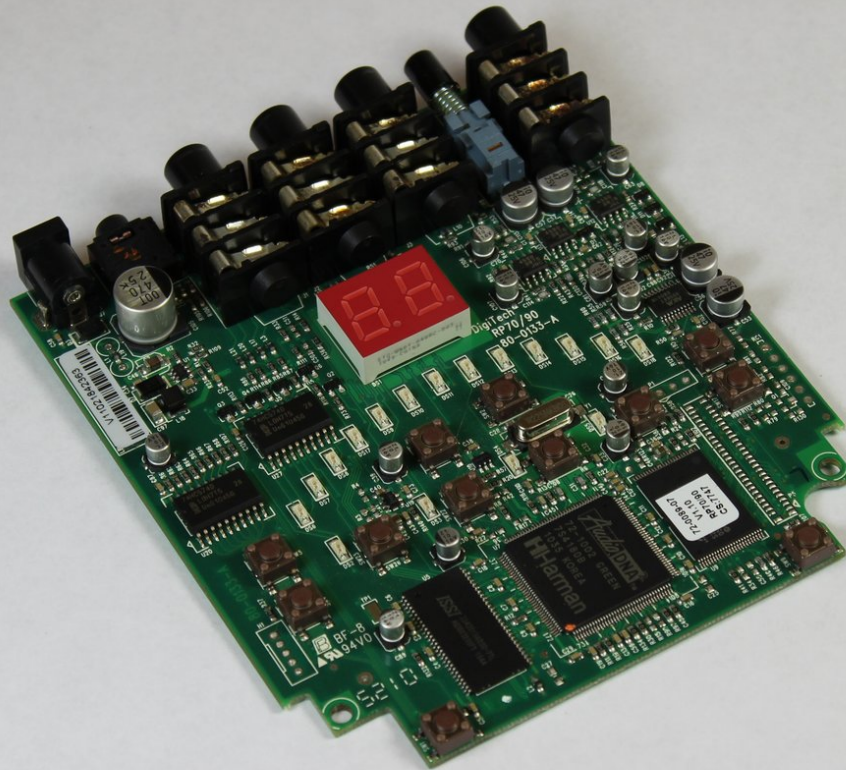

INTRODUCTION

If you need to replace your motherboard or inspect its solder connections, use this guide to remove it. Removing the motherboard will be necessary if you want to replace any other component of the device.



TOOLS:

- [Phillips #0 Screwdriver](#) (1)
-

Step 1 — Motherboard



⚠ Unplug the device from its AC power adapter; unplug anything connected to the input/output jacks.


- Remove the four 8mm Phillips #0 screws located on the back panel.

Step 2



- Remove the back panel to expose the motherboard.

Step 3

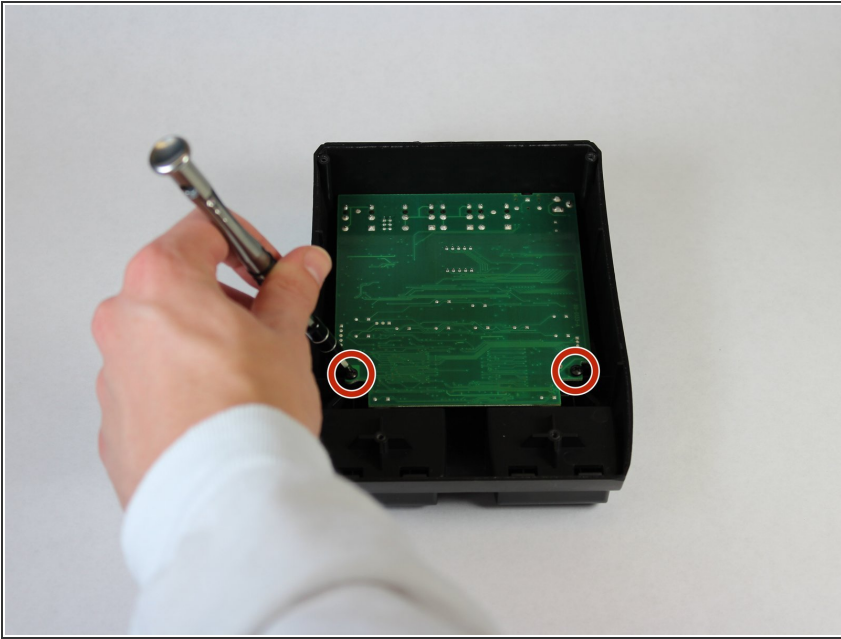

- Remove the two 11mm #0 Phillips screws located at the bottom of the motherboard.

Step 4



- Lift the indented end of the motherboard opposite the input/output jacks. Then, pull away from the input/output jacks to slide the motherboard out of the casing.

To reassemble your device, follow these instructions in reverse order.