

INTRODUCTION

Follow this guide to replace the SSD in your Lenovo YOGA 730-15IKB. The SSD —like its older predecessor, the hard drive—is where files are stored on your computer. If your SSD is getting full, you could upgrade to a higher capacity drive for more storage space.

If your computer powers on and lights up but does not boot into an operating system (like Windows), you may need to replace a failed SSD.

It is always a good idea to make a backup of your data before removing your SSD.

TOOLS:

- [T5 Torx Screwdriver](#) (1)
- [iFixit Opening Tool](#) (1)
- [Phillips #1 Screwdriver](#) (1)

PARTS:

- [Crucial P3 NVMe PCIe M.2 2280SS SSD - solid performance, switching from HDD or SATA to NVMe™](#) (1)
- [Crucial P3 Plus NVMe PCIe M.2 2280SS SSD - fast Gen4 NVMe™ storage for data-intensive applications](#) (1)
- [Crucial P5 Plus NVMe PCIe M.2 2280SS SSD - professionals, creatives, and hardcore gamers](#) (1)

Step 1 — Bottom Cover



⚠ Turn off the computer and unplug the charger before going any further.

- Flip the laptop over so you can see the underside.
- Remove the ten 7mm T5 Torx screws.

Step 2



- Pry up the bottom cover with an opening tool.
 - Start at the front edge of the cover and make your way along the sides.

Step 3




- Pull the bottom cover up and away from the back hinges.

Step 4 — SSD



- Remove one 2mm Phillips #1 screw.
- ⓘ There may be a sticker covering the screw if the laptop is new.

Step 5

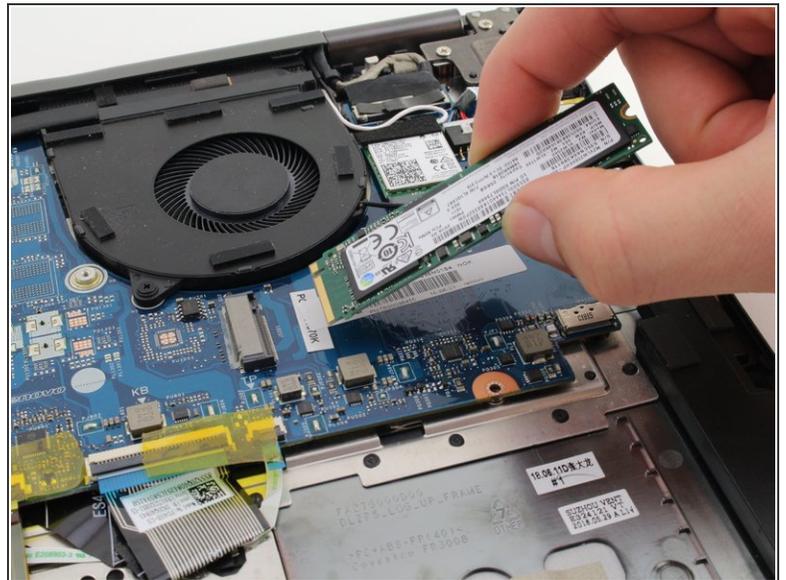

- Pull the SSD out of the socket at its resting angle.
- Do not pull straight upward. Pull towards the side of the laptop.

To reassemble your device, follow these instructions in reverse order.