




Lenovo Yoga 710-15IKB Fan Replacement

This guide is useful for broken, inefficient,...

Written By: Stephanie Alexander

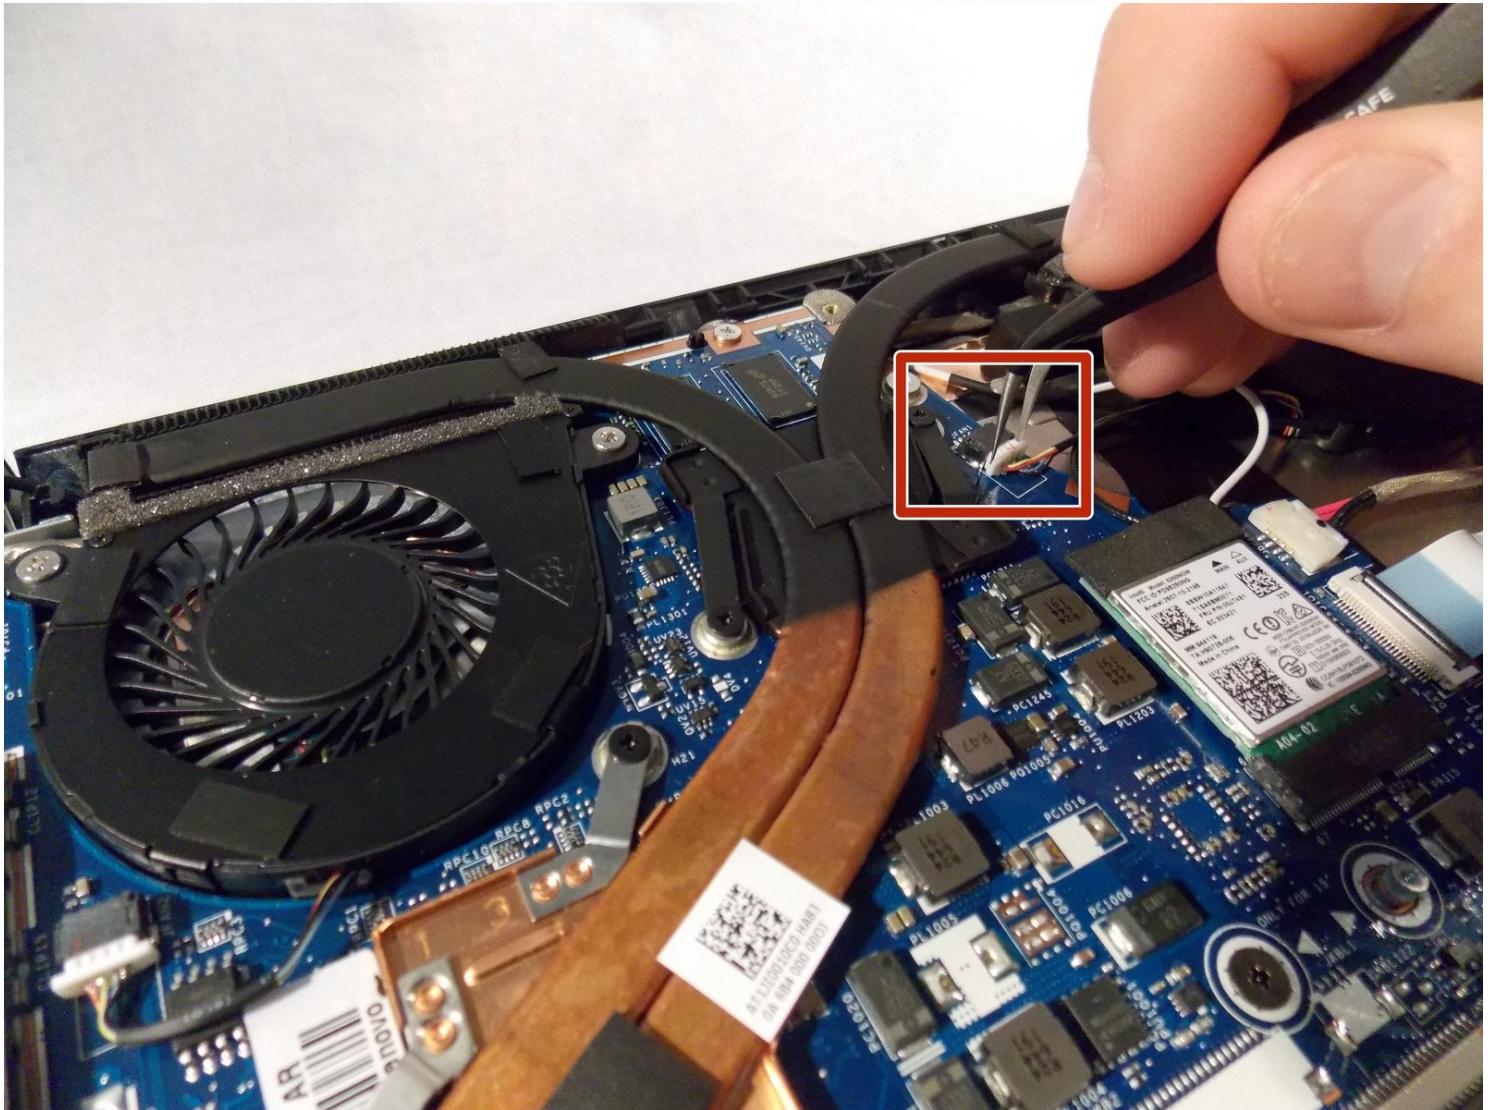

INTRODUCTION

This guide is useful for broken, inefficient, or defective fans within a Lenovo Yoga 710-15IKB. For loud or overheating fans, use this guide after confirming that dust is not the cause for fan issues.


TOOLS:



Phillips #00 Screwdriver (1)
T5 Torx Screwdriver (1)
iFixit Opening Tool (1)
Tweezers (1)
Phillips #1 Screwdriver (1)

PARTS:


Lenovo IdeaPad Yoga 710-15 Left Fan (1)

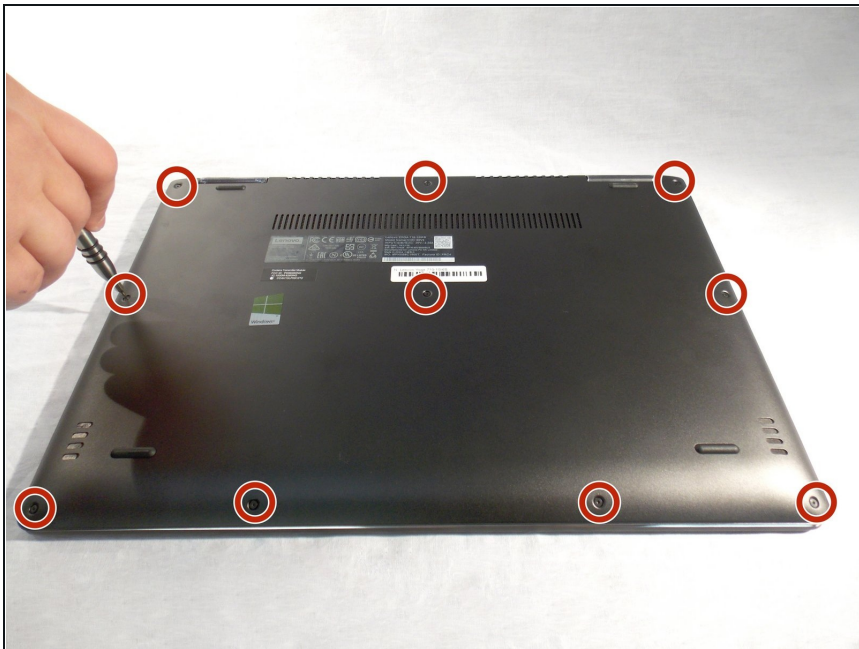Step 1 — Battery



-  Ensure your computer is completely OFF before starting this guide.
- Remove the ten 3.3 mm T5 screws from the base cover.
 -  The screws aren't all the same length. Be sure to keep the screws sorted as you work.

Step 2

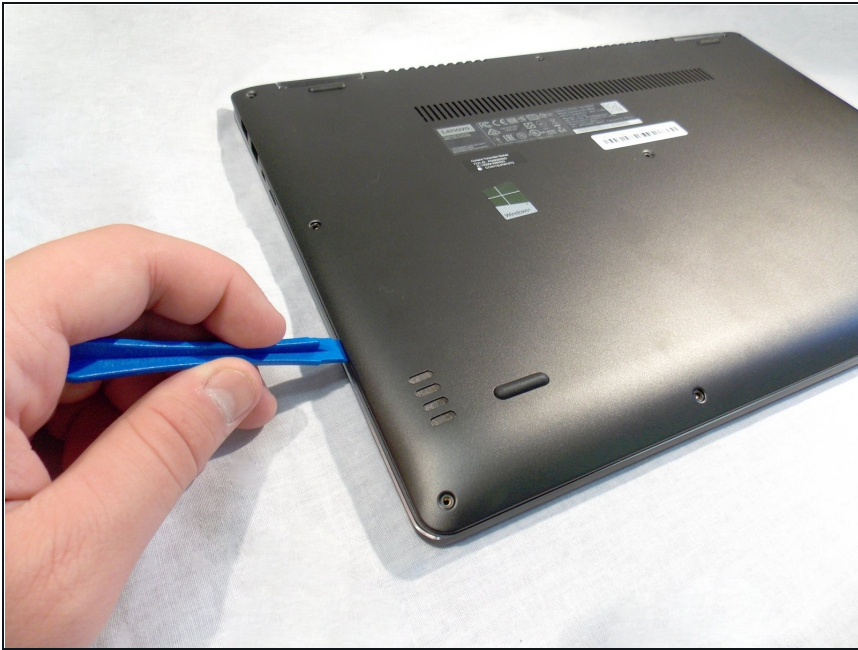


- Slide an opening tool between the base and back cover and work your way around the entire device to release the back cover.

Step 3




- Lift and remove the back cover.

Step 4

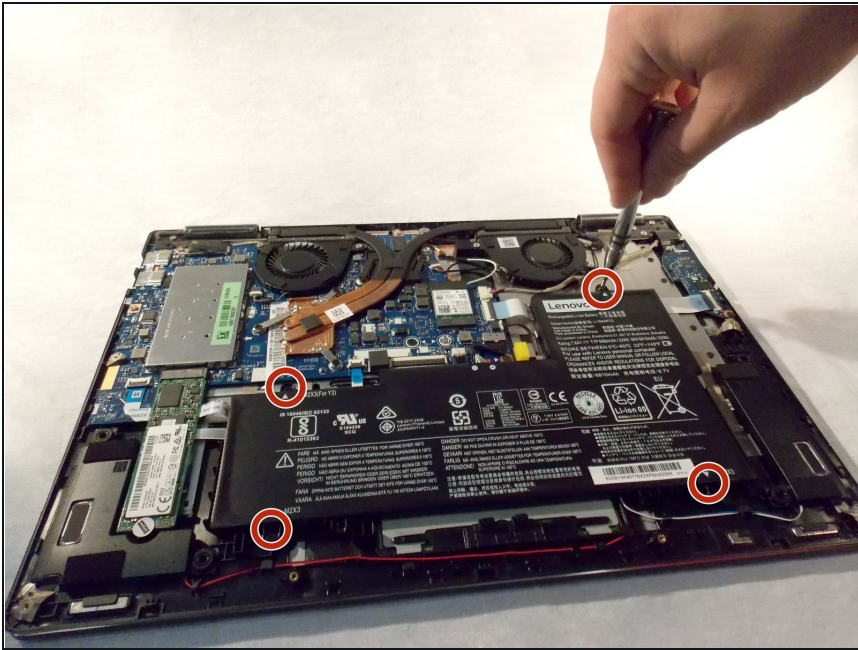


- Remove the four 3.5 mm screws around the battery using a Phillips #1 screwdriver.

Step 5

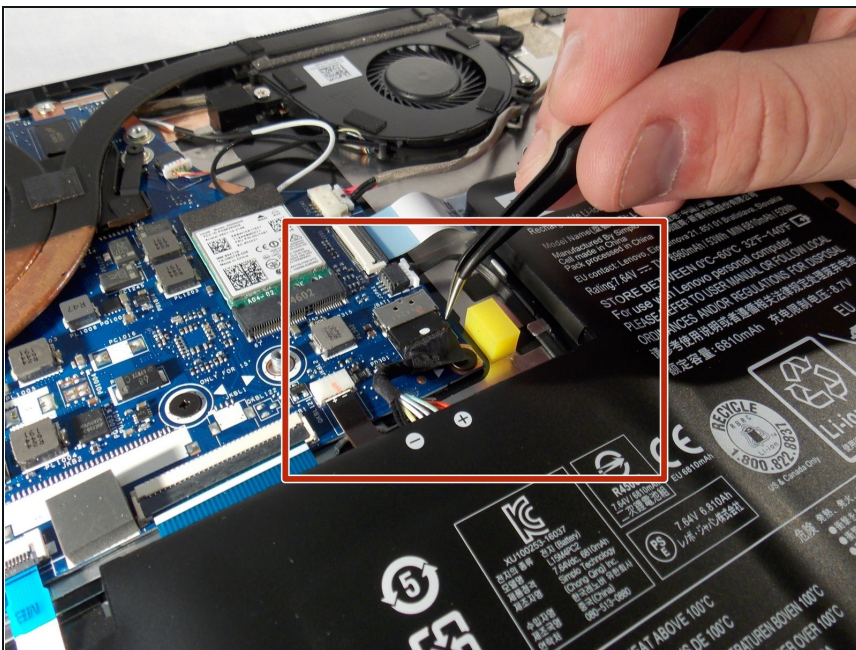


- Disconnect the battery by pulling its cable away from the hinge with a pair of [tweezers](#) or your fingers.

Step 6

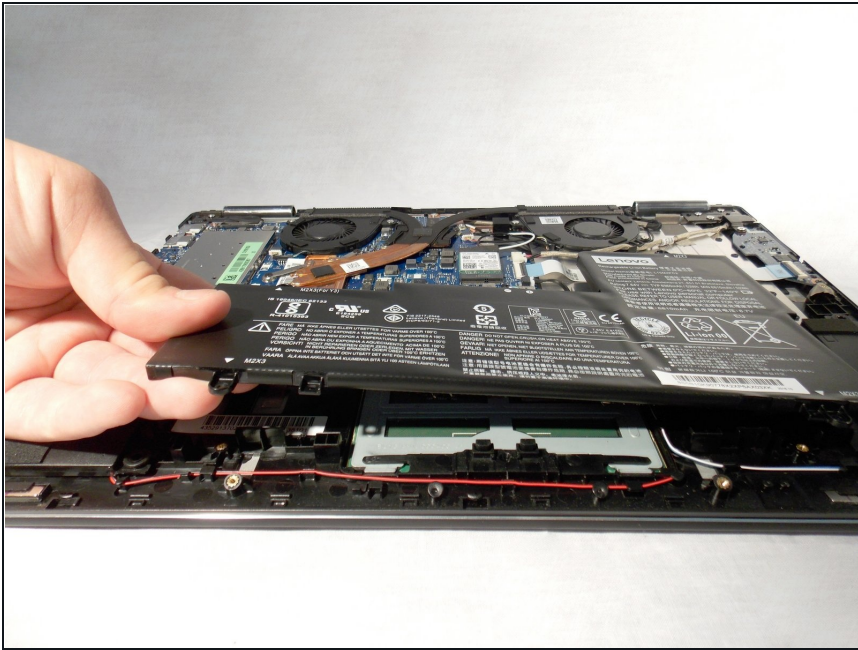


- Gently lift and remove the battery.

Step 7 — Fan

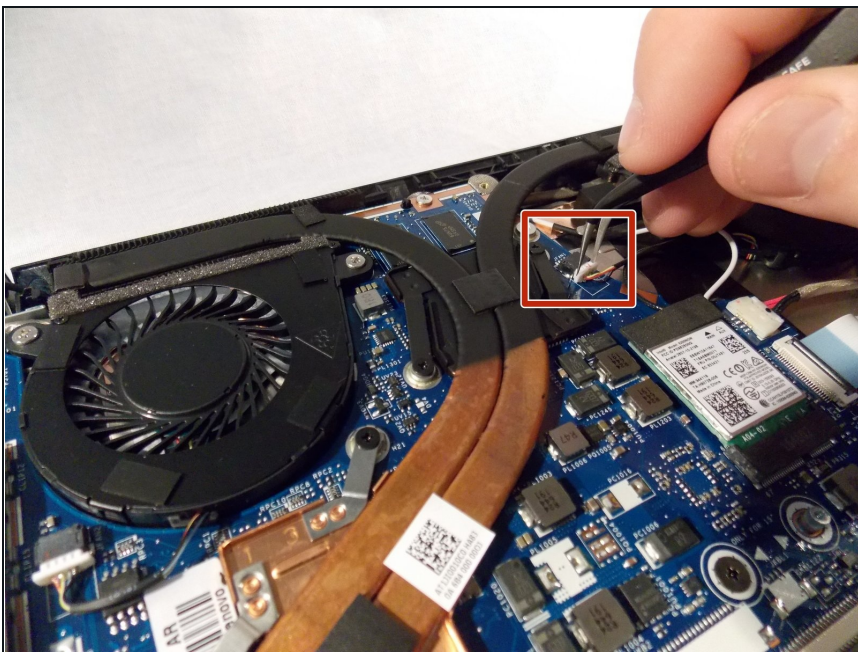

- Use [tweezers](#) to grab the fan harness.
- Gently pull the harness to disconnect from motherboard.

Step 8

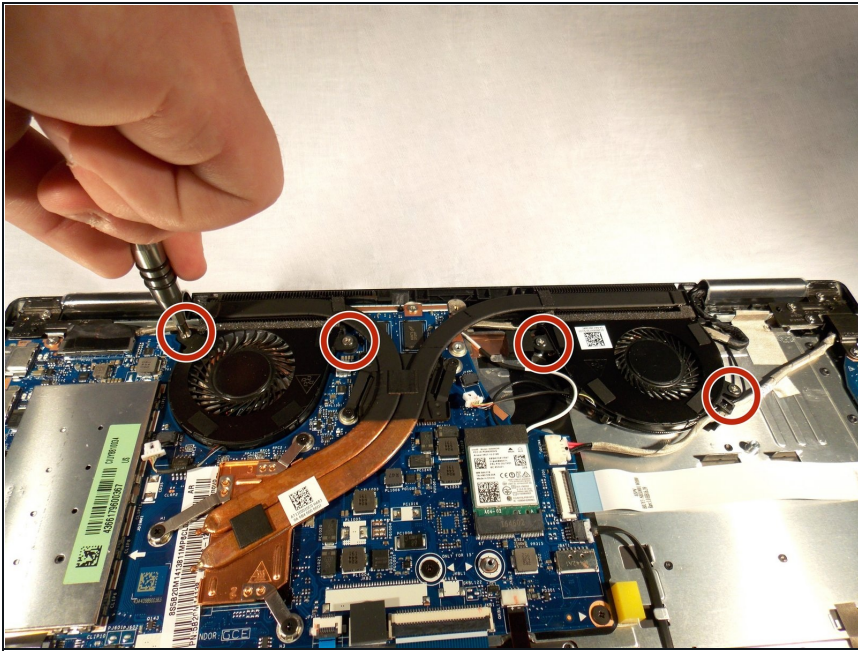

- Use a Phillips #1 screwdriver to remove the four screws holding down the fans.

To reassemble your device, follow these instructions in reverse order.