


LG X Power Charging Port Replacement

This guide will show you how to replace the...

Written By: Chad Sears

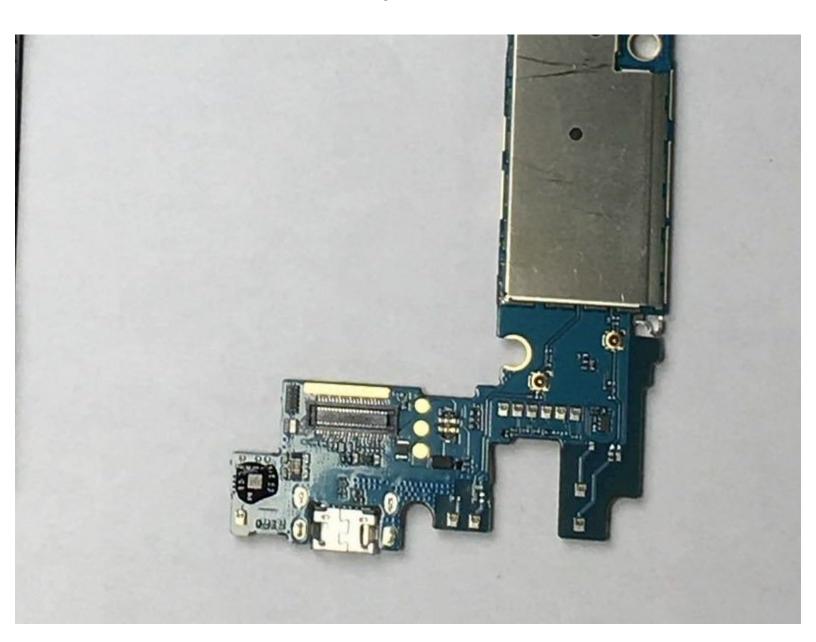

INTRODUCTION

This guide will show you how to replace the charging port on a LG X Power smartphone.



TOOLS:

- iFixit Opening Tool (1)
- Spudger (1)
- Phillips #0 Screwdriver (1)
- Soldering Iron (1)

Step 1 — LG X Power Disassembly





 Insert a plastic opening tool above the AUX jack and slide it around the perimeter to pop the back cover off.

Step 2





Remove the twelve 2.5mm Phillips #0 screws from the back of the phone.

Step 3






- Insert a plastic opening tool underneath the mid-frame and pry upwards until you hear a click.
- With the plastic opening tool still underneath the mid-frame, work your way around the perimeter until it's free from the smartphone.

Step 4 — Charging Port







- Use the flat end of a spudger to disconnect the front and rear cameras from the motherboard.
- Pull the cameras out to remove them.

Step 5




- Use the flat end of a spudger to disconnect the battery from the motherboard.
- You will not be removing anything, just disconnecting.

Step 6



 Insert a plastic opening tool underneath the motherboard and pry upwards to remove it.

Step 7

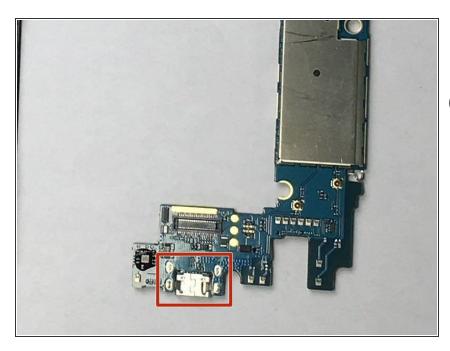

- Desolder the MicroUSB charging port from the motherboard.
- if you need help soldering, follow this guide.

To reassemble your device, follow these instructions in reverse order.